


N


NEW MEXICO OIL CONSERVATION COMMISSION

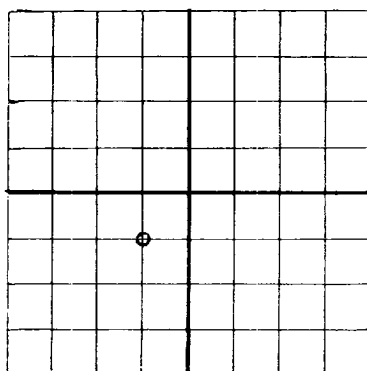

AREA 640 ACRES
LOCATE WELL CORRECTLY

Santa Fe, New Mexico

WELL RECORD



Mail to Oil Conservation Commission, Santa Fe, New Mexico, or its proper agent not more than twenty days after completion of well. Follow instructions in the Rules and Regulations of the Commission. Indicate questionable data by following it with (?). SUBMIT IN TRIPLICATE.

DUPLICATE

Phillips Petroleum Company

Bartlesville, Oklahoma

Company or Operator

Address

Santa Fe

Well No. 11

in SW/4

of Sec. 26

T. 17-S

Lease

R. 35-E

N. M. P. M.

Vacuum

Field,

Lea

County.

Well is 1980' feet ~~XXXX~~ north of the ~~XXXX~~ south line and 1980' feet ~~XXXX~~ east of the ~~XXXX~~ west line of Sec. 26

If State land the oil and gas lease is No. B-2360 Assignment No. _____

If patented land the owner is _____, Address _____

If Government land the permittee is _____, Address _____

The Lessee is Phillips Petroleum Company, Address Bartlesville, Oklahoma

Drilling commenced September 8, 1938, Drilling was completed October 16, 1938

Name of drilling contractor Oil Well Drilling Company, Address Dallas, Texas

Elevation above sea level at top of casing 3913.7' feet.

The information given is to be kept confidential until Not confidential 19 _____

OIL SANDS OR ZONES

No. 1, from 4207' to 4611' No. 4, from _____ to _____

No. 2, from _____ to _____ No. 5, from _____ to _____

No. 3, from _____ to _____ No. 6, from _____ to _____

IMPORTANT WATER SANDS

Include data on rate of water inflow and elevation to which water rose in hole.

No. 1, from None logged - drilled to with rotary. feet. _____

No. 2, from _____ to _____ feet. _____

No. 3, from _____ to _____ feet. _____

No. 4, from _____ to _____ feet. _____

CASING RECORD

SIZE	WEIGHT PER FOOT	THREADS PER INCH	MAKE	AMOUNT	KIND OF SHOE	CUT & FILLED FROM	PERFORATED		PURPOSE
							FROM	TO	
9-5/8" OD	36#	8	South Chester	1696' 4"	Halliburton				
7" OD	24#	10	SS	4206' 7"	Halliburton				

MUDDING AND CEMENTING RECORD

SIZE OF HOLE	SIZE OF CASING	WHERE SET	NO. SACKS OF CEMENT	METHOD USED	MUD GRAVITY	AMOUNT OF MUD USED
12"	9-5/8"	1696' 4"	860	Halliburton	No Record	No Record
8 1/2"	7"	4206' 7"	400	Halliburton	No Record	No Record

PLUGS AND ADAPTERS

Heaving plug—Material _____ Length _____ Depth Set _____

Adapters—Material _____ Size _____

RECORD OF SHOOTING OR CHEMICAL TREATMENT

SIZE	SHELL USED	EXPLOSIVE OR CHEMICAL USED	QUANTITY	DATE	DEPTH SHOT OR TREATED	DEPTH CLEANED OUT
		Did not shoot or acidize				

Results of shooting or chemical treatment - -

RECORD OF DRILL-STEM AND SPECIAL TESTS

If drill-stem or other special tests or deviation surveys were made, submit report on separate sheet and attach hereto.

TOOLS USED

Rotary tools were used from 0 feet to 4611 feet, and from _____ feet to _____ feet

Cable tools were used from - feet to - feet, and from _____ feet to _____ feet

PRODUCTION

Put to producing October 19, 1938

The production of the first 24 hours was 211 barrels of fluid of which 100 % was oil; 0 %

emulsion; 0 % water; and 0 % sediment. Gravity, Be 38.2

If gas well, cu. ft. per 24 hours _____ Gallons gasoline per 1,000 cu. ft. of gas _____

Rock pressure, lbs. per sq. in. 650#

EMPLOYEES

Driller _____, Driller _____

Driller _____, Driller _____

FORMATION RECORD ON OTHER SIDE

I hereby swear or affirm that the information given herewith is a complete and correct record of the well and all work done on it so far as can be determined from available records.

Subscribed and sworn to before me this 19th _____

day of October 1938

_____ Notary Public

My Commission expires _____

Midland, Texas October 19, 1938

Place Date

Position District Superintendent

Representing Phillips Petroleum Company

Company or Operator

Address Box #1390, Midland, Texas

FORMATION RECORD

FROM	TO	THICKNESS IN FEET	FORMATION
0	38	38	Caliche
38	335	297	Caliche & Redbed
335	651	316	Redbed
651	743	92	Hard Shells Redbed
743	907	164	Redbed & Shells
907	946	39	Red Rock & Redbed
946	1034	88	Redbed, Red Rock & Shells
1034	1114	80	Redbed & Shells
1114	1376	262	Red Rock
1376	1418	42	Red Rock & Shells
1418	1437	19	Red Rock
1437	1540	103	Red Rock, Shale & Shells
1540	1580	40	Red Rock
1580	1611	31	Red Rock & Blue Shale
1611	1661	50	Red Rock & Sticky Shale
1661	1681	20	Red Rock, Anhydrite, Shells
1681	1691	10	Redbed & Blue Shale
1691	1810	119	Anhydrite
1810	1960	150	Anhydrite & Red Rock
1960	2106	146	Anhydrite & Salt
2106	2260	154	Anhydrite & Potash
2260	2355	95	Anhydrite, Potash, Salt
2355	2550	195	Salt, Anhydrite Shells
2550	2755	205	Salt & Potash
2755	2892	137	Salt, Anhydrite & Gyp.
2892	3027	135	Anhydrite
3027	3223	196	Anhydrite & Gyp.
3223	3387	164	Anhydrite
3387	3423	36	Anhydrite, Gyp., Shale
3423	3455	32	Anhydrite & Gyp.
3455	3536	81	Anhydrite
3536	3567	31	Anhydrite & Gyp.
3567	3575	8	Anhydrite
3575	3582	7	Lime
3582	3631	18	Anhydrite & Lime
3631	3650	19	Anhydrite & Gyp.
3650	3955	305	Anhydrite & Lime
3955	3977	22	Anhydrite & Gyp.
3977	4005	28	Anhydrite & Lime
4005	4035	30	Lime
4035	4095	60	Anhydrite & Lime
4095	4450	355	Lime
4450	4471	21	Sdy. Lime
4471	4611	140	Lime
			Total Depth