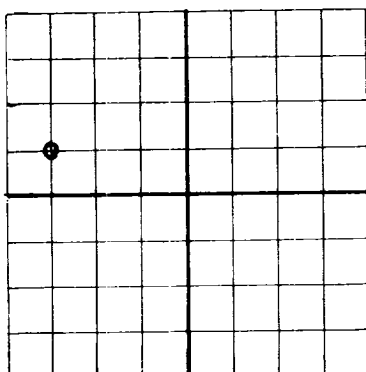



NEW MEXICO OIL CONSERVATION COMMISSION

AREA 640 ACRES
LOCATE WELL CORRECTLY

Santa Fe, New Mexico

WELL RECORD

Mail to Oil Conservation Commission, Santa Fe, New Mexico, or its proper agent not more than twenty days after completion of well. Follow instructions in the Rules and Regulations of the Commission. Indicate questionable data by following it with (?). SUBMIT IN TRIPLICATE.

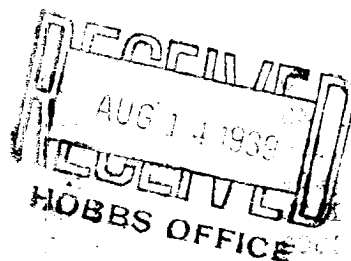

DUPLICATE

Phillips Petroleum Company

Bartlesville, Oklahoma

Company or Operator

Address

Santa Fe

Well No.

30

in SW/4 NW/4

of Sec.

26

T 17-S

Lease

35-E

Vacuum

Field

Lea

County

Well is 1980

feet south of the North line and

660

feet east of the

West

Section 26

If State land the oil and gas lease is No.

B-1497

Assignment No.

If patented land the owner is

Address

If Government land the permittee is

Address

The Lessee is

Phillips Petroleum Company

Address

Bartlesville, Oklahoma

Drilling commenced July 16,

1939

Drilling was completed

August 8,

1939

Name of drilling contractor

Loffland Brothers

Address

Tulsa, Oklahoma

Elevation above sea level at top of casing

3909.8

feet.

The information given is to be kept confidential until

Not confidential

19

OIL SANDS OR ZONES

No. 1, from 4145' to 4575' No. 4, from to

No. 2, from to No. 5, from to

No. 3, from to No. 6, from to

IMPORTANT WATER SANDS

Include data on rate of water inflow and elevation to which water rose in hole.

No. 1, from None logged - drilled with rotary. to feet.

No. 2, from to feet.

No. 3, from to feet.

No. 4, from to feet.

CASING RECORD

SIZE	WEIGHT PER FOOT	THREADS PER INCH	MAKE	AMOUNT	KIND OF SHOE	CUT & FILLED FROM	PERFORATED		PURPOSE
							FROM	TO	
9-5/8" OD	36#	8	SS	1654'0"	Halliburton				
				(Overall Tally)					
7" OD	24#	10	SS	4169'8"	Halliburton				
				(Overall Tally)					

MUDDING AND CEMENTING RECORD

SIZE OF HOLE	SIZE OF CASING	WHERE SET	NO. SACKS OF CEMENT	METHOD USED	MUD GRAVITY	AMOUNT OF MUD USED
12 1/4"	9-5/8"	1676'11"	900	Halliburton		
8-3/4"	7"	4145' 2"	400	Halliburton		

PLUGS AND ADAPTERS

Heaving plug—Material Length Depth Set

Adapters—Material Size

RECORD OF SHOOTING OR CHEMICAL TREATMENT

SIZE	SHELL USED	EXPLOSIVE OR CHEMICAL USED	QUANTITY	DATE	DEPTH SHOT OR TREATED	DEPTH CLEANED OUT
		Did not shoot or acidize.				

Results of shooting or chemical treatment

RECORD OF DRILL-STEM AND SPECIAL TESTS

If drill-stem or other special tests or deviation surveys were made, submit report on separate sheet and attach hereto.

TOOLS USED

Rotary tools were used from 0 feet to 4575 feet, and from feet to feet

Cable tools were used from feet to feet, and from feet to feet

PRODUCTION

Put to producing August 10, 1939

The production of the first 7 hours was 255 barrels of fluid of which 0 % was oil; 0 %

emulsion; 0 % water; and 0 % sediment. Gravity, Be 37.8

If gas well, cu. ft. per 24 hours Gallons gasoline per 1,000 cu. ft. of gas

Rock pressure, lbs. per sq. in.

EMPLOYEES

Driller Driller

Driller Driller

FORMATION RECORD ON OTHER SIDE

I hereby swear or affirm that the information given herewith is a complete and correct record of the well and all work done on it so far as can be determined from available records.

Subscribed and sworn to before me this 11th

Odessa, Texas

August 11, 1939

day of August 1939

Name Date

Position District Chief Clerk

Representing Phillips Petroleum Company

Company or Operator

My Commission expires 6-1-41

Address Drawer 811, Odessa, Texas

FORMATION RECORD

FROM	TO	THICKNESS IN FEET	FORMATION
0	30	30	Calachi
30	355	325	Red Rock
355	999	644	Red Rock and Red Bed
999	1189	190	Red Rock & Shells
1189	1300	111	Red Bed Red Rock & Shells
1300	1383	83	Red Rock & Shells
1383	1535	152	Red Bed
1535	1558	23	Red Rock
1558	1643	85	Red Rock & Shells
1643	1644	1	Red Rock
1644	1742	98	Anhydrite
1742	1837	95	Salt
1837	2578	741	Salt Anhydrite Shells
2578	2840	262	Salt Anhydrite
2840	3363	523	Anhydrite
3363	3479	116	Anhydrite Lime & Gyp
3479	3547	68	Anhydrite
3547	3593	46	Anhydrite Lime & Gyp
3593	3740	147	Anhydrite
3740	3798	58	Anhydrite Lime & Gyp
3798	3860	62	Anhydrite
3860	3901	41	Anhydrite Lime & Gyp
3901	3955	54	Anhydrite & Lime
3955	3973	18	Anhydrite
3973	4018	45	Lime Anhydrite & Gyp
4018	4070	52	Anhydrite & Lime
4070	4575	505	Lime T.D.