


NEW MEXICO OIL CONSERVATION COMMISSION I

Santa Fe, New Mexico

MISCELLANEOUS NOTICES

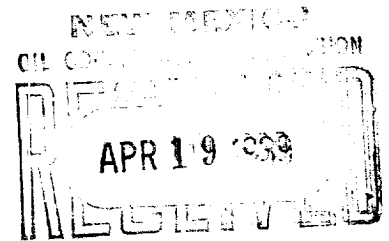

Midland, Texas
Place

April 17, 1939
Date

Oil Conservation Commission,
Santa Fe, New Mexico

Gentlemen:

Following is a notice of intention to do certain work as described below at the

STANDARD OIL COMPANY OF TEXAS 5 (B-1839) Well No. 3
Company or Operator Lease

of Sec. 27, T. 17-S, T. 35-E N.M.P.M., Vacuum Field,
Lea County.

FULL DETAILS OF PROPOSED
PLAN OF WORK

1. Land 7" casing in bradenhead at approximately 4200'.
2. Pump in 150 barrels fresh water to displace mud. Pinch in bradenhead gates if hole tries to blow out.
3. Follow water with 144 sacks El Toro Cement. While pumping plug down, keep bradenhead gate pinched in to keep back pressure on well. Squeeze last 50' of cement back in formation by shutting in bradenhead completely.
4. After standing cemented 72 hours, open bradenhead and let gas blow out water.

This gas to be used for domestic and lease development purposes only.

APPROVED _____, 19____.
except as follows:

OIL CONSERVATION COMMISSION,

By _____

Title _____

STANDARD OIL COMPANY OF TEXAS

By WM. SIMPSON

Position Division Operating Supt.

Send communications regarding well to

Name J. V. Harris

Address Box AA, Hobbs, New Mexico

Santa Fe, New Mexico

MISCELLANEOUS NOTICES

Midland, Texas
Place

April 11, 1932
Date

Oil Conservation Commission,
Santa Fe, New Mexico

Gentlemen:

Following is a notice of intention to do certain work as described below at the

Well No. 3

E (B-1532)

STANDARD OIL COMPANY OF TEXAS

Lease

Company or Operator

of Sec. 1, T. 15-N, R. 15-E, W.M.P.M., Sec. 15, T. 15-N, R. 15-E, W.M.P.M.,

County, Lea

THE DETAILS OF PROPOSED
PLAN OF WORK

1. Lay 1/2" casing in prebore at approximately 2500'.
2. Pump in 100 barrels fresh water to displace mud. When in prebore gates at hole tried to blow out.
3. Follow water with 100 sacks of Torco Cement. While pumping, plug down, keep prebore gates pinned in to keep back pressure on well. Spacers last 50' of cement back in formation by shutting in prebore completely.
4. After standing cemented 24 hours, open prebore and let gas blow out water. This gas to be used for domestic and lease development purposes only.

STANDARD OIL COMPANY OF TEXAS

APPROVED: _____, 1932

except as follows:

By _____, W. M. P. M.

Position Division Operating Supt.

Send communications regarding well to

Name J. V. Harris

Address Box 44, Hobbs, New Mexico

OIL CONSERVATION COMMISSION

By _____

Title _____