


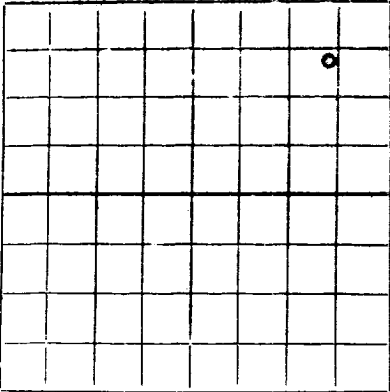

NEW MEXICO OIL CONSERVATION COMMISSION

Santa Fe New Mexico
DISTRICT OFFICE 000

1962 APR 17 AM
WELL RECORD 9:55

Mail to District Office, Oil Conservation Commission, to which Form C-101 was sent not later than twenty days after completion of well. Follow instructions in Rules and Regulations of the Commission. Submit in QUINTUPLICATE. If State Land submit 6 Copies

AREA 640 ACRES
LOCATE WELL CORRECTLY

Phillips Petroleum Company
(Company or Operator)

Santa Fe
(Lease)

Well No. 64, in NE 1/4 of NE 1/4, of Sec. 34, T. 17S, R. 35E, NMPM.
Undesignated Pool, Lea County.
Well is 760 feet from north line and 760 feet from east line
of Section 34. If State Land the Oil and Gas Lease No. is B-2519
Drilling Commenced 2-26-62, 19. Drilling was Completed 4-8-62, 19.
Name of Drilling Contractor Phillips Petroleum Company Rig 18
Address Bartlesville, Oklahoma
Elevation above sea level at Top of Tubing Head 3923' (Ground). The information given is to be kept confidential until not confidential, 19.

OIL SANDS OR ZONES

No. 1, from 8534 to 9100' TD No. 4, from to
No. 2, from to No. 5, from to
No. 3, from to No. 6, from to

IMPORTANT WATER SANDS

Include data on rate of water inflow and elevation to which water rose in hole.

No. 1, from to feet.
No. 2, from to feet.
No. 3, from to feet.
No. 4, from to feet.

CASING RECORD

SIZE	WEIGHT PER FOOT	NEW OR USED	AMOUNT	KIND OF SHOE	CUT AND PULLED FROM	PERFORATIONS	PURPOSE
13-3/8"	48	new	300'	Hallib	-	-	Surface
8-5/8"	32-24	new	3227'	"	-	-	Intermediate
5-1/2"	14-15-17	new	9084'	Baker	-	8536-8874'	Production

MUDDING AND CEMENTING RECORD

SIZE OF HOLE	SIZE OF CASING	WHERE SET	NO. BAGS OF CEMENT	METHOD USED	MUD GRAVITY	AMOUNT OF MUD USED
17-1/2	13-3/8	316'	350	Pump-plug		
11"	8-5/8	3244'	400	"		
7-7/8"	5-1/2	9100'	520	"		

RECORD OF PRODUCTION AND STIMULATION

(Record the Process used, No. of Qts. or Gals. used, interval treated or shot.)

Acidized with 1000 gallons 15% regular acid.

Result of Production Stimulation Flowed 24 hours: 720 barrels oil, no water.

Depth Cleaned Out

RECORD OF DRILL-STEM AND SPECIAL TESTS

If drill-stem or other special tests or elevation surveys were made, submit report on separate sheet and attach hereto

TOOLS USED

Rotary tools were used from surface feet to 9100' TD feet, and from feet to feet.
Cable tools were used from feet to feet, and from feet to feet.

PRODUCTION

Put to Producing April 14, 1962
OIL WELL: The production during the first 24 hours was 720 barrels of liquid of which 100 % was
was oil; % was emulsion; % water; and % was sediment. A.P.I.
Gravity 39.6
GAS WELL: The production during the first 24 hours was M.C.F. plus barrels of
liquid Hydrocarbon. Shut in Pressure lbs.
Length of Time Shut in

PLEASE INDICATE BELOW FORMATION TOPS (IN CONFORMANCE WITH GEOGRAPHICAL SECTION OF STATE):

Southeastern New Mexico			Northwestern New Mexico		
T. Anhy. Rustler	1630		T. Devonian		T. Ojo Alamo
T. Salt			T. Silurian		T. Kirtland-Fruitland
B. Salt			T. Montoya		T. Farmington
T. Yates	2920		T. Simpson		T. Pictured Cliffs
T. 7 Rivers			T. McKee		T. Menefee
T. Queen	3816		T. Ellenburger		T. Point Lookout
T. Grayburg	4104		T. Gr. Wash		T. Mancos
T. San Andres	4425		T. Granite		T. Dakota
T. Glorieta	6124		T.		T. Morrison
T. Drinkard			T.		T. Penn.
T. xxxxx Clearfork	6242		T.		T.
T. Abo	8534		T.		T.
T. Penn.			T.		T.
T. Miss.			T.		T.

FORMATION RECORD

From	To	Thickness in Feet	Formation	From	To	Thickness in Feet	Formation
0	476	476	Redbed				
476	1904	1428	Redbed, anhydrite				
1904	3770	1866	Salt, anhydrite				
3770	5640	1870	Dolomite				
5640	8310	2670	Dolomite, sand				
8310	9100	790	Dolomite				

ATTACH SEPARATE SHEET IF ADDITIONAL SPACE IS NEEDED

I hereby swear or affirm that the information given herewith is a complete and correct record of the well and all work done on it so far as can be determined from available records.

April 16, 1962 (Date)
Company or Operator Phillips Petroleum Company Address Box 2105 - Hobbs, New Mexico
Name [Signature] Position or Title District Chief Clerk