


NEW MEXICO OIL CONSERVATION COMMISSION
Santa Fe, New Mexico

WELL RECORD

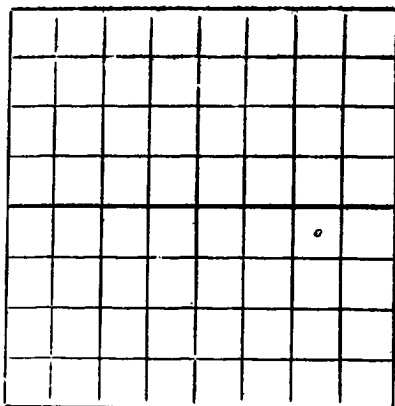

AREA 640 ACRES
LOCATE WELL CORRECTLY

Mail to District Office, Oil Conservation Commission, to which Form C-101 was sent not later than twenty days after completion of well. Follow instructions in Rules and Regulations of the Commission. Submit in QUINTUPLICATE. If State Land submit 6 Copies

Cities Service Petroleum Company State BJ
(Company or Operator) (Lease)
Well No. 1, in NE 1/4 of SE 1/4, of Sec. 35, T. 17-S, R. 35-E, NMPM.
Undesignated Pool, Lea County.
Well is 990' feet from East line and 2310' feet from South line
of Section 35. If State Land the Oil and Gas Lease No. is B-1482
Drilling Commenced 11:00 PM 2-17, 19 61 Drilling was Completed 10:00 AM 4-5, 19 61
Name of Drilling Contractor Cactus Drilling Corporation
Address Box 344 - San Angelo, Texas
Elevation above sea level at Top of Tubing Head 3909' DF. 3897' Gr. The information given is to be kept confidential until
19 61

OIL SANDS OR ZONES

No. 1, from 8445' to 8975' No. 4, from - to -
No. 2, from - to - No. 5, from - to -
No. 3, from - to - No. 6, from - to -

IMPORTANT WATER SANDS

Include data on rate of water inflow and elevation to which water rose in hole.

No. 1, from - to - feet.
No. 2, from - to - feet.
No. 3, from - to - feet.
No. 4, from - to - feet.

CASING RECORD

SIZE	WEIGHT PER FOOT	NEW OR USED	AMOUNT	KIND OF SHOE	CUT AND PULLED FROM	PERFORATIONS	PURPOSE
13 3/8" OD	48#	New	308.36'	Rector	-	-	Surface
8 5/8" OD	32 & 24#	New	3496.7'	Rector	-	-	Intermediate
5 1/2" OD	15.5 & 17#	New & Used	9006.97'	Rector	-	8938'-44', 8929'-36'	Production
						8914'-22' (84 holes)	

MUDDING AND CEMENTING RECORD

SIZE OF HOLE	SIZE OF CASING	WHERE SET	NO. SACKS OF CEMENT	METHOD USED	MUD GRAVITY	AMOUNT OF MUD USED
17 1/2"	13 3/8" OD	325.76'	350	Plug	-	-
11 1/2"	8 5/8" OD	3512.10'	1485	Plug	-	-
7 7/8"	5 1/2" OD	9009'	800	Plug	-	-

RECORD OF PRODUCTION AND STIMULATION

(Record the Process used, No. of Qts. or Gals. used, interval treated or shot.)

Acidized w/500 gal 8944'-8914'
Acidized w/2000 gal 8944' - 8914'
Result of Production Stimulation Swabbed 35 bbls water to pits then flowed 52 bbls oil. 13.79 bbls water load. 12 1/2 hrs. Swabbed & flowed 127 bbls. 37° gr. oil. 82 bbls water. 16 hrs.
GOR 565. FTP 50# Depth Cleaned Out. PBD 8975'

RECORD OF DRILL-STEM AND SPECIAL TESTS

If drill-stem or other special tests or deviation surveys were made, submit report on separate sheet and attach hereto

TOOLS USED

Rotary tools were used from -0- feet to 9009' feet, and from - feet to - feet.
Cable tools were used from - feet to - feet, and from - feet to - feet.

PRODUCTION

Put to Producing April 6, 1961

OIL WELL: The production during the first 24 hours was 241 barrels of liquid of which 100% was oil; -0-% was emulsion; -0-% water; and -0-% was sediment. A.P.I. Gravity 37°

GAS WELL: The production during the first 24 hours was - M.C.F. plus - barrels of liquid Hydrocarbon. Shut in Pressure - lbs.

Length of Time Shut in -

PLEASE INDICATE BELOW FORMATION TOPS (IN CONFORMANCE WITH GEOGRAPHICAL SECTION OF STATE):

Southeastern New Mexico

Northwestern New Mexico

T. Anhy. 1785'	T. Devonian	T. Ojo Alamo
T. Salt	T. Silurian	T. Kirtland-Fruitland
B. Salt	T. Montoya	T. Farmington
T. Yates 3155'	T. Simpson	T. Pictured Cliffs
T. 7 Rivers	T. McKee	T. Menefee
T. Queen 4063'	T. Ellenburger	T. Point Lookout
T. Grayburg	T. Gr. Wash	T. Mancos
T. San Andres 4746'	T. Granite	T. Dakota
T. Glorieta	T. Leonard 6437'	T. Morrison
T. Drinkard	T.	T. Penn
T. Tubbs	T.	T.
T. Abo 8445'	T.	T.
T. Penn	T.	T.
T. Miss	T.	T.

FORMATION RECORD

From	To	Thickness in Feet	Formation	From	To	Thickness in Feet	Formation
0'	185'	185'	Surface Soil, Caliche				
185'	330'	145'	Red Bed				
330'	1673'	1343'	Red Bed & Anhydrite				
1673'	1790'	117'	Anhydrite				
1790'	3006'	1216'	Anhydrite and salt				
3006'	3461'	455'	Anhydrite & l.				
3461'	3810'	349'	Anhydrite & lime				
3810'	7305'	3495'	Lime				
7305'	7522'	217'	Lime and sand				
7522'	7613'	91'	Lime				
7613'	7723'	110'	Lime and sand				
7723'	8264'	541'	Lime				
8264'	8334'	70'	Dolomite and chert				
8334'	8352'	18'	Chert and lime				
8352'	8541'	189'	Lime and shale				
8541'	8629'	88'	Lime				
8629'	8671'	42'	Lime and shale				
8671'	8693'	22'	Lime				
8693'	8730'	37'	Lime and shale				
8730'	9009'	279'	Lime and dolomite				
TD 9009' PBD 8975'							

ATTACH SEPARATE SHEET IF ADDITIONAL SPACE IS NEEDED

I hereby swear or affirm that the information given herewith is a complete and correct record of the well and all work done on it so far as can be determined from available records.

Company or Operator Cities Service Petroleum Co.
Name G. M. Geyer

Address Box 07 - Hobbs, New Mexico
Position Title Dist. Supt.

4-7-61 (Date)