


NEW MEXICO OIL CONSERVATION COMMISSION

Santa Fe, New Mexico

10790 OCT 21 000

WELL RECORD

Mail to District Office, Oil Conservation Commission, to which Form C-101 was sent not later than twenty days after completion of well. Follow instructions in Rules and Regulations of the Commission. Submit in QUINTUPLICATE. If State Land submit 6 Copies

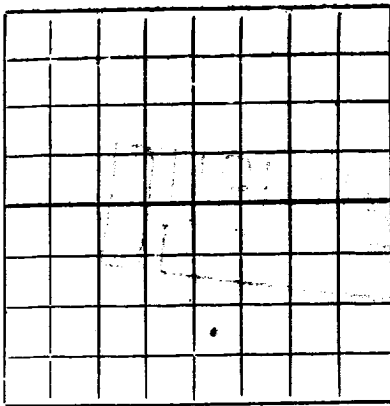

AREA 640 ACRES  
LOCATE WELL CORRECTLY

Cities Service Petroleum Company

State BJ

(Company or Operator)

(Lease)

Well No. 3, in SE 1/4 of SW 1/4, of Sec. 35, T. 17-S., R. 35-E., NMPM.

East Vacuum Abo Pool, Lea County.

Well is 990' feet from South line and 2310' feet from East line

of Section 35. If State Land the Oil and Gas Lease No. is B-1482

Drilling Commenced July 6, 1961. Drilling was Completed 8-17, 1961.

Name of Drilling Contractor Cactus Drilling Corporation

Address Box 344 - San Angelo, Texas

Elevation above sea level at Top of Tubing Head 3911' DE: 3900' Gr. The information given is to be kept confidential until

, 19

OIL SANDS OR ZONES

No. 1, from to No. 4, from to

No. 2, from to No. 5, from to

No. 3, from to No. 6, from to

IMPORTANT WATER SANDS

Include data on rate of water inflow and elevation to which water rose in hole.

No. 1, from to feet

No. 2, from to feet

No. 3, from to feet

No. 4, from to feet

CASING RECORD

SIZE	WEIGHT PER FOOT	NEW OR USED	AMOUNT	KIND OF SHOE	CUT AND PULLED FROM	PERFORATIONS	PURPOSE
13 3/8" OD	48#	New	338.44	Larkin	-	-	Surface
8 5/8" OD	24 & 32#	New	3495.14	Rector	-	-	Intermediate
5 1/2" OD	15.5 & 17#	New	9005.70	Rector	-	-	Production

MUDDING AND CEMENTING RECORD

SIZE OF HOLE	SIZE OF CASING	WHERE SET	NO. SACKS OF CEMENT	METHOD USED	MUD GRAVITY	AMOUNT OF MUD USED
17 1/2"	13 3/8"	354.54	375	Plug	-	-
11 1/2"	8 5/8"	3510.59	1850	Plug	-	-
7 7/8"	5 1/2"	9015.-	1170	Plug	-	-

RECORD OF PRODUCTION AND STIMULATION

(Record the Process used, No. of Qts. or Gals. used, interval treated or shot.)

Result of Production Stimulation

Depth Cleaned Out. PSTD 8979'

RECORD OF DRILL-STEM AND SPECIAL TESTS

If drill-stem or other special tests or deviation surveys were made, submit report separate sheet and attach hereto

TOOLS USED

Rotary tools were used from -0- feet to \*9015' feet, and from - feet to - feet.  
Cable tools were used from - feet to - feet, and from - feet to - feet.

PRODUCTION

Put to Producing 8-18, 19 61.

OIL WELL: The production during the first 24 hours was 228 barrels of liquid of which 99.8% was rated was oil; % was emulsion; % water; and 2/10% was sediment. A.P.I. Gravity. 37.7

GAS WELL: The production during the first 24 hours was M.C.F. plus barrels of liquid Hydrocarbon. Shut in Pressure lbs.

Length of Time Shut in

PLEASE INDICATE BELOW FORMATION TOPS (IN CONFORMANCE WITH GEOGRAPHICAL SECTION OF STATE):

Southeastern New Mexico			Northwestern New Mexico		
T. Anhy. 1775'	T. Devonian	T. Ojo Alamo	T. Salt	T. Silurian	T. Kirtland-Fruitland
B. Salt	T. Montoya	T. Farmington	T. Yates. 3180'	T. Simpson	T. Pictured Cliffs
T. 7 Rivers	T. McKee	T. Menefee	T. Queen. 4132'	T. Ellenburger	T. Point Lookout
T. Grayburg	T. Gr. Wash.	T. Mancos	T. San Andres. 4794'	T. Granite	T. Dakota
T. Glorieta	T. Leonard 6697'	T. Morrison	T. Drinkard	T.	T. Penn.
T. Tubbs	T.	T.	T. Abo. 8485'	T.	T.
T. Penn.	T.	T.	T. Miss.	T.	T.

FORMATION RECORD

From	To	Thickness in Feet	Formation	From	To	Thickness in Feet	Formation
-0-	355	355	Surface soil, caliche & red bed	6194	6290	96	Lime and sand
355	1628	1273	Red Bed & Anhydrite	6290	6468	178	Sand w/lime and chert
1628	1821	193	Red Bed, Anhydrite & Sand	6468	7358	890	Lime
1821	1833	12	Anhydrite and gyp	7358	7515	157	Lime and chert
1833	2388	555	Anhydrite and salt	7515	7520	5	Lime w/chert and sand
2388	2864	476	Anhydrite, gyp and salt	7520	7648	128	Lime and chert
2864	3118	254	Anhydrite	7648	7740	92	Dolomite and chert
3118	3305	187	Anhydrite and gyp	7740	7898	158	Lime and chert
3305	3510	205	Anhydrite	7898	7972	74	Lime and Dolomite
3510	4773	1263	Lime	7972	8060	88	Lime
4773	4828	55	Lime and sand	8060	8115	55	Brown Dolomite and lime
4828	5228	400	Lime	8115	8201	86	Lime
5228	5407	179	Lime and sand	8201	8243	42	Dolomite and lime
5407	5970	563	Lime	8243	8313	70	Lime
5970	6010	40	Lime and sand	8313	8370	57	Lime w/sand and chert
6010	6111	101	Lime and chert	8370	8789	419	Lime and chert
6111	6194	83	Lime and sand and chert	8789	8904	115	Lime
				8904	9015	111	Lime *

\* Schlumberger measurement

ATTACH SEPARATE SHEET IF ADDITIONAL SPACE IS NEEDED TO 9015\* PBD 8979'

I hereby swear or affirm that the information given herewith is a complete and correct record of the well and all work done on it so far as can be determined from available records.

Company or Operator. Cities Service Petroleum Co. Address. Box 97 - Hobbs, New Mexico  
Name. G. M. Geyer Position or Title. Dist. Superintendent  
8-18-61 (Date)