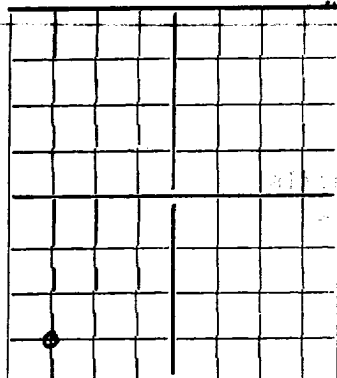


SEP 24 1941

HOBBS OFFICE

Santa Fe, New Mexico

WELL RECORD

AREA 640 ACRES
LOCATE WELL CORRECTLY

Mail to Oil Conservation Commission, Santa Fe, New Mexico, or its proper agent not more than twenty days after completion of well. Follow instructions in the Rules and Regulations of the Commission. Indicate questionable data by following it with (P). **SUBMIT IN TRIPPLICATE**

Uscan Drilling Co. & H. G. Marshall

Oklahoma City, Okla.

Company or Operator

Address

J. Cunningham

Well No. 1

in SW 1/4

of Sec. 22

T. 19 S

R. 35 E

N. M. P. M.

Wildcat

Field,

Lea

County.

Well is 860

feet north of the 1/4 line and

860

feet east of the 1/4 line of

Sec. 22

If State land the oil and gas lease is No.

Assignment No.

If patented land the owner is

J. M. Cunningham

Address

Hobbs, N. M.

If Government land the permittee is

Address

The Lessee is

Address

Drilling commenced August 11

19 41

Drilling was completed

September 18

19 41

Name of drilling contractor

Uscan Drilling Co.

Address

Oklahoma City, Okla.

Elevation above sea level at top of casing

8753

feet. D. F.

The information given is to be kept confidential until

Not confidential

19

OIL SANDS OR ZONES

No. 1, from @ 30'

to

No. 4, from

to

No. 2, from @ 60'

to

No. 5, from

to

No. 3, from

to

No. 6, from

to

IMPORTANT WATER SANDS

Include data on rate of water inflow and elevation to which water rose in hole.

No. 1, from

to

feet.

No. 2, from

to

feet.

No. 3, from

to

feet.

No. 4, from

to

feet.

CASING RECORD

SIZE	WEIGHT PER FOOT	THREADS PER INCH	MAKE	AMOUNT	KIND OF SHOE	CUT & FILLED FROM	PERFORATED FROM	TO	PURPOSE
8 1/2	32 1/2		Seamless						

MUDDING AND CEMENTING RECORD

SIZE OF HOLE	SIZE OF CASING	WHERE SET	NO. SACKS OF CEMENT	METHOD USED	MUD GRAVITY	AMOUNT OF MUD USED
11"	8 1/2"	1634	500	Plug		

PLUGS AND ADAPTERS

Heaving plug—Material

Length

Depth Set

Adapters—Material

Size

RECORD OF SHOOTING OR CHEMICAL TREATMENT

SIZE	SHELL USED	EXPLOSIVE OR CHEMICAL USED	QUANTITY	DATE	DEPTH SHOT OR TREATED	DEPTH CLEANED OUT

Results of shooting or chemical treatment

RECORD OF DRILL-STEM AND SPECIAL TESTS

If drill-stem or other special tests or deviation surveys were made, submit report on separate sheet and attach hereto.

TOOLS USED

Rotary tools were used from 80 feet to 5001 feet, and from 5001 feet to 5001 feet

Cable tools were used from 0 feet to 80 feet, and from 80 feet to 80 feet

PRODUCTION

Put to producing, 19

The production of the first 24 hours was Dry hole barrels of fluid of which % was oil; %

emulsion; % water; and % sediment. Gravity, Be

If gas well, cu. ft. per 24 hours. Gallons gasoline per 1,000 cu. ft. of gas

Rock pressure, lbs. per sq. in.

EMPLOYEES

E. Bleunt, Driller; H. Johnson, Driller

J. B. Adkinson, Driller; C. B. Harris, Driller

FORMATION RECORD ON OTHER SIDE

I hereby swear or affirm that the information given herewith is a complete and correct record of the well and all work done on it so far as can be determined from available records.

Subscribed and sworn to before me this

day of

19 41

Notary Public.

My Commission expires

Place

Date

Name

Position

Representing

Address

FORMATION RECORD

AND MAP

FROM	TO	THICKNESS IN FEET	FORMATION
0'	80'		Top Soil
80	130		Shale
130	471		Shale - Shells
471	625		Blue Shale, Red Beds - Shells
625	750		Red Rock with shale breaks
750	1083		Red Beds - Shale
1083	1144		Lime Shells - Shale
1144	1194		Red Rock
1194	1355		Red Beds - Shale - Sand
1355	1465		Red Beds
1465	1520		Broken Red Beds - Anhydrite
1520	1570		Red Beds
1570	1640		Red Beds - Anhydrite
1640	1740		Red Beds Set 8 1/2 at 1634' using 500 sac cement
1740	1853		Anhydrite
1853	1933		Anhydrite & Salt
1933	2130		Anhydrite - Broken Salt
2130	2609		Salt - Shells
2609	3340		Anhydrite Shells & Salt
3340	3465		Anhydrite
3465	3485		Anhydrite - Gyp
3485	3590		Sandy Lime
3590	3571		Anhydrite
3571	3653		Sandy Lime - Anhydrite
3653	3695		Anhydrite
3695	3703		Gyp
3703	3779		Anhydrite - Gyp
3779	3801		Anhydrite - Gyp - Lime
3801	3827		Lime
3827	3833		Sand
3833	3860		Lime
3860	3894		Anhydrite - Lime
3894	4163		Lime
4163	4167		Broken Lime - Sand
4167	4183		Sand
4183	4553		Lime
4553	4565		Lime - Sand
4565	4620		Lime
4620	4635		Lime - Sand
4635	4648		Lime
4648	4655		Sand
4655	4755		Lime
4755	4757		Sand - Lime
4757	4791		Lime
4791	4812		Lime & Sand
4812	4818		Blue Sand
4818	4842		Lime
4842	4854		Sand
4854	4857		Lime
4857	4870		Lime - Sand
4870	4955		Lime
4955	4980		Sand - Lime
4980	5001		Lime
			Total Depth