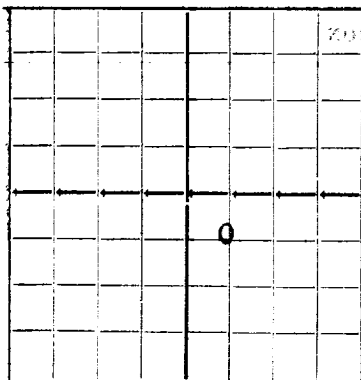


N.

NEW MEXICO OIL CONSERVATION COMMISSION

Santa Fe, New Mexico

AREA 640 ACRES
LOCATE WELL CORRECTLY

WELL RECORD

Mail to Oil Conservation Commission, Santa Fe, New Mexico, or its proper agent not more than twenty days after completion of well. Follow instructions in the Rules and Regulations of the Commission. Indicate questionable data by following it with (?). SUBMIT IN TRIPLICATE.

Amerada Petroleum Corporation, Drawer D, Monument, New Mexico

Company or Operator

Address

Henry S. RecordWell No. 1in NW 1/4 SE 1/4of Sec. 26T. 19S

Lease

R. 35EN. M. P. M. No DesignationField, Lea

County.

Well is 3300 feet south of the North line and 1980 feet west of the East line of Section 26-19S-35E

If State land the oil and gas lease is No. _____ Assignment No. _____

If patented land the owner is Henry S. Record, Address Monument, New Mexico.

If Government land the permittee is _____, Address _____

The Lessee is _____, Address _____

Drilling commenced April 14, 19 46 Drilling was completed April 24, 19 46Name of drilling contractor Rowan Drilling Company, Address Ft. Worth, TexasElevation above sea level at top of casing 3705' feet.

The information given is to be kept confidential until _____ 19 _____

OIL SANDS OR ZONES

No. 1, from None to _____ No. 4, from _____ to _____

No. 2, from _____ to _____ No. 5, from _____ to _____

No. 3, from _____ to _____ No. 6, from _____ to _____

IMPORTANT WATER SANDS

Include data on rate of water inflow and elevation to which water rose in hole.

No. 1, from _____ to _____ feet. _____

No. 2, from _____ to _____ feet. _____

No. 3, from _____ to _____ feet. _____

No. 4, from _____ to _____ feet. _____

CASING RECORD

SIZE	WEIGHT PER FOOT	THREADS PER INCH	MAKE	AMOUNT	KIND OF SHOE	CUT & FILLED FROM	PERFORATED FROM	TO	PURPOSE
10 3/4"	32.75	8	Spang	215	Tex Pat				
7 5/8"	26.40	8	Spang	3367	Guide shoe				

MUDDING AND CEMENTING RECORD

SIZE OF HOLE	SIZE OF CASING	WHERE SET	NO. SACKS OF CEMENT	METHOD USED	MUD GRAVITY	AMOUNT OF MUD USED
13 3/4"	10 3/4"	215	200	Halliburton		
9 7/8"	7 5/8"	3367	550	Halliburton		

PLUGS AND ADAPTERS

Heaving plug—Material _____ Length _____ Depth Set _____

Adapters—Material _____ Size _____

RECORD OF SHOOTING OR CHEMICAL TREATMENT

SIZE	SHELL USED	EXPLOSIVE OR CHEMICAL USED	QUANTITY	DATE	DEPTH SHOT OR TREATED	DEPTH CLEANED OUT

Results of shooting or chemical treatment _____

RECORD OF DRILL-STEM AND SPECIAL TESTS

If drill-stem or other special tests or deviation surveys were made, submit report on separate sheet and attach hereto.

TOOLS USED

Rotary tools were used from Surface feet to 3499' feet, and from _____ feet to _____ feet

Cable tools were used from _____ feet to _____ feet, and from _____ feet to _____ feet

PRODUCTION

Put to producing Dry Hole, 19 _____

The production of the first 24 hours was _____ barrels of fluid of which _____ % was oil; _____ %

emulsion; _____ % water; and _____ % sediment. Gravity, Be _____

If gas well, cu. ft. per 24 hours _____ Gallons gasoline per 1,000 cu. ft. of gas _____

Rock pressure, lbs. per sq. in. _____

EMPLOYEES

C. T. Reynolds _____ Driller Earl Goodman _____ Driller

D. L. Nowlin _____ Driller _____ Driller

FORMATION RECORD ON OTHER SIDE

I hereby swear or affirm that the information given herewith is a complete and correct record of the well and all work done on it so far as can be determined from available records.

Subscribed and sworn to before me this 29Monument, New Mexico April 29, 1946day of April, 19 46Name E. W. TaylorPosition Asst. Dist. Supt.Representing Amerada Petroleum Corporation

Company or Operator

My Commission expires _____

Address Drawer D, Monument, New Mexico.

FORMATION RECORD

FROM	TO	THICKNESS IN FEET	FORMATION
0	19	19	Cellar
19	26	7	Caliche
26	160	115	Red Bed and shells
160	220	60	Red Bed
220	310	90	Red Bed and shells
310	1265	955	Red Bed
1265	1350	85	Red Bed and SHALE Shale
1350	1485	135	Red Bed, Shale and Anhydrite
1485	1785	300	Red Bed and shells
1785	1843	58	Anhydrite and Gypsum
1843	1900	57	Anhydrite
1900	1925	25	Salt
1925	2080	155	Red Bed and salt streaks
2080	2318	238	Salt and Red Bed
2318	2519	201	Salt
2519	2833	314	Salt streaks and Red Rock
2833	2845	12	Salt and Red Bed
2845	3250	5	Salt streaks and anhydrite
3250	3370	120	Anhydrite
3370	3452	82	Anhydrite, Gypsum and Lime
3452	3499	47	Anhydrite and Lime
3499			Total Depth.