


# NOTES

1. BLOW-OUT PREVENTERS AND MASTER VALVE MAY BE MANUAL OPERATED.
2. ALL FITTINGS MUST BE IN GOOD CONDITION, 2,000# W.P. (4,000 P.S.I. TEST), MINIMUM.
3. NIPPLE ABOVE BLOW-OUT PREVENTER SHALL BE SAME SIZE AS CASING BEING DRILLED THROUGH.
4. KELLY COCK TO BE INSTALLED ON KELLY.
5. CMSCO OR COMPARABLE SAFETY VALVE MUST BE AVAILABLE ON RIG FLOOR AT ALL TIMES WITH PROPER CONNECTION OR SUB, 2,000# W.P. (4,000 P.S.I. TEST), MINIMUM.
6. RAMS IN PREVENTERS WILL BE INSTALLED AS FOLLOWS:
 

TOP PREVENTOR	-	DRILL PIPE OR CASING RAMS
BOTTOM PREVENTER	-	BLIND RAMS OR MASTER VALVE.
7. SPOOL OR CROSS MAY BE ELIMINATED IF CONNECTIONS ARE AVAILABLE IN THE LOWER PART OF THE BLOW-OUT PREVENTER BODY.
8. DOUBLE OR SPACE SAVER TYPE PREVENTERS MAY BE USED IN LIEU OF TWO SINGLE PREVENTERS.
9. CROSS WITH SIDE OUTLETS MAY BE PLACED BETWEEN MASTER GATE AND BLOW-OUT PREVENTER IF TWO SINGLE UNITS ARE USED.

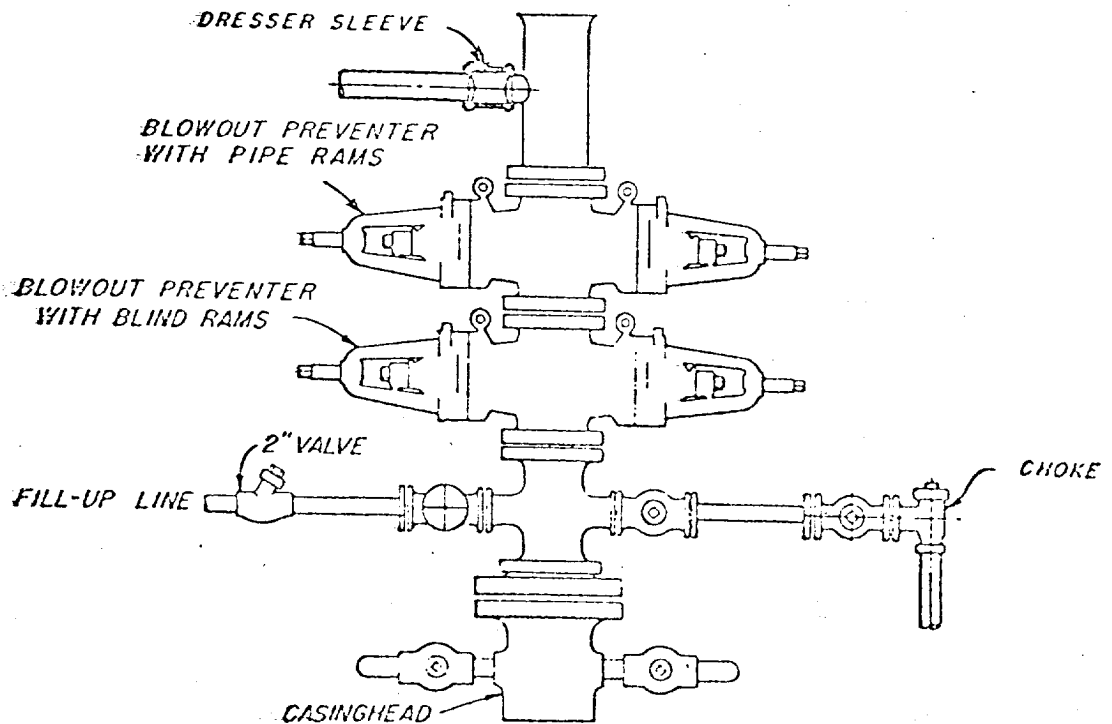

BLOWOUT PREVENTER HOOK-UP

2,000 psi Working Pressure

EXHIBIT D-2

8-1-61  
Amoco Production Company