


N.


NEW MEXICO OIL CONSERVATION COMMISSION

Santa Fe, New Mexico

WELL RECORD



Mail to Oil Conservation Commission, Santa Fe, New Mexico, or its proper agent not more than twenty days after completion of well. Follow instructions in the Rules and Regulations of the Commission. Indicate questionable data by following it with (?). SUBMIT IN TRIPLICATE.

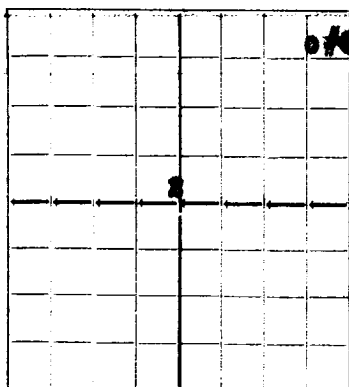

AREA 640 ACRES
LOCATE WELL CORRECTLY

Stanolind Oil & Gas Company

Tulsa, Oklahoma

Company or Operator

Address

State "E" Tr. 18

Well No. 8

in Eo/4 NE/4

of Sec. 2

T. 17-S

Lease

R. 36-E

N. M. P. M. South Lovington

Field,

Lea

County.

Well is 660 feet south of the North line and 660 feet west of the East line of Section

If State land the oil and gas lease is No. B-1855

Assignment No.

If patented land the owner is

Address

If Government land the permittee is

Address

The Lessee is Stanolind Oil and Gas Company

Address Tulsa, Oklahoma

Drilling commenced December 14, 1941

Drilling was completed January 29, 1942

Name of drilling contractor Davidson Drilling Co.

Address Fort Worth, Texas

Elevation above sea level at top of casing 3847 feet.

The information given is to be kept confidential until Not confidential

19

OIL SANDS OR ZONES

No. 1, from G 3970

to 3984

No. 4, from

to

No. 2, from G 4125

to 4135

No. 5, from

to

No. 3, from O 4660

to 4980 Pay Sec.

No. 6, from

to

IMPORTANT WATER SANDS

Include data on rate of water inflow and elevation to which water rose in hole.

No. 1, from to feet.

No. 2, from to feet.

No. 3, from to feet.

No. 4, from to feet.

CASING RECORD

SIZE	WEIGHT PER FOOT	THREADS PER INCH	MAKE	AMOUNT	KIND OF SHOE	CUT & FILLED FROM	PERFORATED FROM TO	PURPOSE
15" OD	50#	8 Rt.	Used	252'4"	Belled			Surface string
8-5/8" OD	28#	8 RT.	Used	2044'10"	Larkin			Salt String
5 1/2" OD	14#	8 RT.	Used	4159'5"	Larkin			Oil String
5 1/2" OD	15#	8 RT.	Used	420'0"				Oil String

MUDDING AND CEMENTING RECORD

SIZE OF HOLE	SIZE OF CASING	WHERE SET	NO. SACKS OF CEMENT	METHOD USED	MUD GRAVITY	AMOUNT OF MUD USED
17"	13"OD	263'11"	215	Halliburton		
11"	8-5/8"	2085'11"	600	"		
7-7/8"	5 1/2"	4539' 7"	380	"		

PLUGS AND ADAPTERS

Heaving plug—Material Length Depth Set

Adapters—Material Size

RECORD OF SHOOTING OR CHEMICAL TREATMENT

SIZE	SHELL USED	EXPLOSIVE OR CHEMICAL USED	QUANTITY	DATE	DEPTH SHOT OR TREATED	DEPTH CLEANED OUT
		Halliburton NE	2000 gal	1/26/42	4660-4980	
		" "	4000 gal	1/30/42	" "	

Results of shooting or chemical treatment Acidizing increased potential from 48 BOPD to 130 BOPD

RECORD OF DRILL-STEM AND SPECIAL TESTS

If drill-stem or other special tests or deviation surveys were made, submit report on separate sheet and attach hereto.

TOOLS USED

Rotary tools were used from Surface feet to 4980' TD feet, and from feet to feet

Cable tools were used from feet to feet, and from feet to feet

PRODUCTION

Put to producing February 1, 1942

The production of the first 24 hours was 130 barrels of fluid of which 100 % was oil; %

emulsion; % water; and % sediment. Gravity, Be

Gas 650 MCF cu. ft. per 24 hours Gallons gasoline per 1,000 cu. ft. of gas

Rock pressure, lbs. per sq. in.

EMPLOYEES

R. T. Harrod

Driller

E. H. Woodroff

Driller

R. V. Barfield

Driller

Driller

FORMATION RECORD ON OTHER SIDE

I hereby swear or affirm that the information given herewith is a complete and correct record of the well and all work done on it so far as can be determined from available records.

Subscribed and sworn to before me this 1st

Hobbs, New Mexico

June 1, 1942

Place

Date

day of June, 1942

Name Ralph E. Henderson

Position Field Supt.

Representing Stanolind Oil and Gas Company

Company or Operator

My Commission expires 1/25/44

Address Box "T", Hobbs, New Mexico

FORMATION RECORD

FROM	TO	THICKNESS IN FEET	FORMATION
Surface	60'	60'	Caliche
60'	175'	115'	Sand & shells
175	1080	100	Red bed and shells
1080	1170	90	Red rock and shale
1170	1173	3	Gypsum
1173	1235	62	Red rock
1235	1405	170	Red rock, sand, Gypsum and shale
1405	1540	135	Red rock and shells
1540	2002	462	Red bed, shale and shells
2002	2010	8	Red rock
2010	2042	32	Anhydrite
2042	2120	78	Anhydrite and red rock
2120	2988	868	Anhydrite and salt
2988	3580	592	Anhydrite and red rock
3580	3638	58	Anhydrite and sand
3638	3800	162	Anhydrite and red rock
3800	3892	92	Anhydrite and sand
3892	4088	196	Anhydrite and lime. Show gas 3970-84
4088	4640	552	Lime. Show gas 4125-35
4640	4980	340	Lime and dolomite - Topay 4650'
	4980'		Total depth