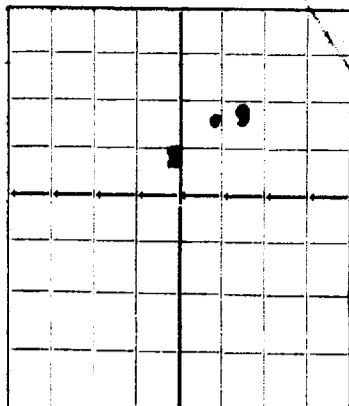


R-361

N.

## NEW MEXICO OIL CONSERVATION COMMISSION

Santa Fe, New Mexico

AREA 640 ACRES  
LOCATE WELL CORRECTLY

## WELL RECORD

Mail to Oil Conservation Commission, Santa Fe, New Mexico, or its proper agent not more than twenty days after completion of well. Follow instructions in the Rules and Regulations of the Commission. Indicate questionable data by following it with (?). SUBMIT IN TRIPLICATE.

Stanelind Oil and Gas Company

Box F Hobbs, New Mexico

State 2 Tract 12 Company or Operator

Address

17R

Well No.

in

of Sec.

T.

36 Lease

South Lovington

Lea

R. 1900 N. M. P. M.

Field.

County.

Well is 1900 feet south of the North line and 1900 feet west of the East line of

Sec. 2 T 36 R - R-361

If State land the oil and gas lease is No. 21553 Assignment No.

If patented land the owner is

Address

If Government land the permittee is

Address

The Lessee is

Address

Drilling commenced

Jan. 11

43

Drilling was completed

March 14

43

Name of drilling contractor

Davidson Drilling Company

Fort Worth, Texas

Elevation above sea level at top of casing

3035 feet.

The information given is to be kept confidential until

19

## OIL SANDS OR ZONES

No. 1, from 4695' to 5147' No. 4, from to  
No. 2, from to No. 5, from to  
No. 3, from to No. 6, from to

## IMPORTANT WATER SANDS

Include data on rate of water inflow and elevation to which water rose in hole.

No. 1, from to feet.  
No. 2, from to feet.  
No. 3, from to feet.  
No. 4, from to feet.

## CASING RECORD

SIZE	WEIGHT PER FOOT	THREADS PER INCH	MAKE	AMOUNT	KIND OF SHOE	CUT & FILLED FROM	PERFORATED FROM TO	PURPOSE
13"	80#	SRT	Used	211' 3"	Belled			Surface string
8-5/8" O.D.	28#	SRT	Used	2057' 10"	Larkin			Salt String
5 1/2" O.D.	14#	SRT	New	4895'				
5 1/2" O.D.	17#	SRT	New	345'	Larkin			Oil String

## MUDDING AND CEMENTING RECORD

SIZE OF HOLE	SIZE OF CASING	WHERE SET	NO. SACKS OF CEMENT	METHOD USED	MUD GRAVITY	AMOUNT OF MUD USED
17 1/2"	13" O.D.	249' 10"	175	Malliburton		
11"	8-5/8" O.D.	2051' 3"	600	"		
7-7/8" O.D.	5 1/2" O.D.	4577' 2"	400	"		

## PLUGS AND ADAPTERS

Heaving plug—Material Length Depth Set  
Adapters—Material Size

## RECORD OF SHOOTING OR CHEMICAL TREATMENT

SIZE	SHELL USED	EXPLOSIVE OR CHEMICAL USED	QUANTITY	DATE	DEPTH SHOT OR TREATED	DEPTH CLEANED OUT
		Dowell XX	7500 gal.	3-24-43	4695' T.D.	
				4-10-43	5147' T.D.	

Results of shooting or chemical treatment: Increased production from 88 BOPD. 250 BOPD Swabbing.

## RECORD OF DRILL-STEM AND SPECIAL TESTS

If drill-stem or other special tests or deviation surveys were made, submit report on separate sheet and attach hereto.

Rotary tools were used from Surface 5147' T.D. feet to feet, and from feet to feet  
Cable tools were used from feet to feet, and from feet to feet

## PRODUCTION

Put to producing May 26 43 19 100  
The production of the first 24 hours was 43 barrels of fluid of which 34 % was oil; %  
% water; % sediment. Gravity, Be  
X gas well, cu. ft. per 24 hours 25,000 Gallons gasoline per 1,000 cu. ft. of gas  
Rock pressure, lbs. per sq. in.

## EMPLOYEES

Frank Weaver Driller R.V. Barfield Driller  
J.S. Potter Driller Driller

## FORMATION RECORD ON OTHER SIDE

I hereby swear or affirm that the information given herewith is a complete and correct record of the well and all work done on it so far as can be determined from available records.

Subscribed and sworn to before me this 29th

Hobbs, New Mexico

May 29, 1943

day of May 19 43

Name Joseph J. Pennington

Position Field Superintendent

Representing Stanelind Oil and Gas Company

Company or Operator

My Commission expires May 5- 1947

Address Box F Hobbs, New Mexico

# FORMATION RECORD

FROM	TO	THICKNESS IN FEET	FORMATION
0	190	190	Sand and Gravel
190	777	587	Red bed and shells
777	1020	243	Red beds and sand
1020	2021	1001	Red beds
2021	2060	39	Anhydrite
2060	2120	60	Red beds and anhydrite
2120	2200	80	Salt, Potash and anhydrite
2200	2465	265	Salt, anhydrite and shells
2465	2770	305	Salt and potash
2770	3088	118	Anhydrite and shale
3088	3151	63	Red beds and anhydrite
3151	3202	51	Anhydrite
3202	3244	42	Anhydrite, gypsum and lime
3244	4432	1188	Anhydrite and lime
4432	5157 S.D.	715	Lime