


JUL 13 1945

NEW MEXICO OIL CONSERVATION COMMISSION

Santa Fe, New Mexico

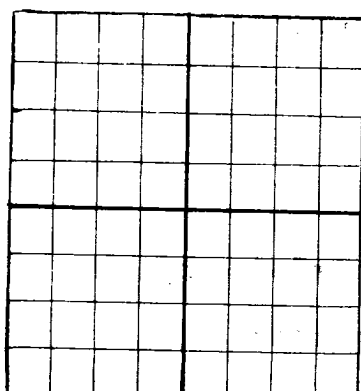

WELL RECORD

Mail to Oil Conservation Commission, Santa Fe, New Mexico, or its proper agent not more than twenty days after completion of well. Follow instructions in the Rules and Regulations of the Commission. Indicate questionable data by following it with (?). SUBMIT IN TRIPPLICATE. FORM C-110 WILL NOT BE APPROVED UNTIL FORM C-105 IS PROPERLY FILLED OUT.

Fred Turner, Jr.

Midland, Texas

Company or Operator

Address

Graham

Well No. 1

in SW/4NW/4 of Sec. 3

T. 17-S

R. 36-E

N. M. P. West Lovington

Field

Lea

County

Well is 1980 feet south of the North line and 4620 feet west of the East line of Sec. 3, 17S, 36E

If State land the oil and gas lease is No. Assignment No.

If patented land the owner is J. D. Graham Address Lovington, N. M.

If Government land the permittee is Address

The Lessee is Address

Drilling commenced June 2nd 1945 Drilling was completed July 10th 1945

Name of drilling contractor Spencer-Turner Drlg. Co., Address Midland, Texas

Elevation above sea level at top of casing 3889 feet.

The information given is to be kept confidential until release now 19

OIL SANDS OR ZONES

No. 1, from ~~Streaks of saturation~~ No. 4, from to
~~and porosity~~ No. 5, from to
 No. 3, from 4750 to 5057 No. 6, from to

IMPORTANT WATER SANDS

Include data on rate of water inflow and elevation to which water rose in hole.

No. 1, from to feet.
 No. 2, from to feet.
 No. 3, from to feet.
 No. 4, from to feet.

CASING RECORD

SIZE	WEIGHT PER FOOT	THREADS PER INCH	MAKE	AMOUNT	KIND OF SHOE	CUT & FILLED FROM	PERFORATED		PURPOSE
							FROM	TO	
13-3/8	43	8	J&L	311	TP				
8-5/8	28	8	J&L	2021	Float				
5 1/2	14	8	J&L	4723	"				

MUDDING AND CEMENTING RECORD

SIZE OF HOLE	SIZE OF CASING	WHERE SET	NO. SACKS OF CEMENT	METHOD USED	MUD GRAVITY	AMOUNT OF MUD USED
17 1/2	13-3/8	311	175	Cemented		
12 1/2	8-5/8	2021	200	Cemented		
7-7/8	5 1/2	4723	400	Cemented		

PLUGS AND ADAPTERS

Heaving plug—Material Length Depth Set
 Adapters—Material Size

RECORD OF SHOOTING OR CHEMICAL TREATMENT

SIZE	SHELL USED	EXPLOSIVE OR CHEMICAL USED	QUANTITY	DATE	DEPTH SHOT OR TREATED	DEPTH CLEANED OUT
		NONE				

Results of shooting or chemical treatment

RECORD OF DRILL-STEM AND SPECIAL TESTS

If drill-stem or other special tests or deviation surveys were made, submit report on separate sheet and attach hereto.

TOOLS USED

Rotary tools were used from 0 feet to 5057 feet, and from feet to feet
 Cable tools were used from feet to feet, and from feet to feet

PRODUCTION

Put to producing July 10 1945
 The production of the first 24 hours was 65 barrels of fluid of which 100 % was oil; %
 emulsion; % water; and % sediment. Gravity, Be. 370
 If gas well, cu. ft. per 24 hours Gallons gasoline per 1,000 cu. ft. of gas
 Rock pressure, lbs. per sq. in.

EMPLOYEES

T. T. Floyd

Driller

H. C. Hildebrand

Driller

Allen Stratton

Driller

Driller

FORMATION RECORD ON OTHER SIDE

I hereby swear or affirm that the information given herewith is a complete and correct record of the well and all work done on it so far as can be determined from available records.

Subscribed and sworn to before me this 11

day of July 1945

AILEE MAXWELL Notary Public

My Commission expires 6-1-47

Midland, Texas July 11, 1945

Name

Position Authorized Agent

Representing Fred Turner, Jr.

Address Midland, Texas

FORMATION RECORD

FROM	TO	THICKNESS IN FEET	FORMATION
0	204		Shale & sand
204	285		Shells & shale
285	566		Red bed
566	944		Red bed & shells
944	1360		Red bed
1360	1930		Red bed, red rock shale, anhydrite
1930	1953		Red bed and shale
1953	2020		Anhy., shells & red rock
2020	2044		Anhydrite
2044	2129		Anhydrite
2129	2500		Salt
2500	2765		Salt
2765	2940		Salt, shale, & shells
2940	3000		Salt & potash
3000	3075		Anhydrite & shells
3075	3128		Anhydrite
3128	3350		Anhydrite, gyp & shale
3350	3445		Anhydrite
3445	3650		Anhydrite & gyp
3650	3879		Anhydrite & lime
3879	3970		Anhydrite
3970	4086		Anhydrite
4086	4396		Anhydrite
4396	4520		Anhydrite
4520	4723		Anhydrite & lime
4723	4832		Lime
4832	5057		Lime