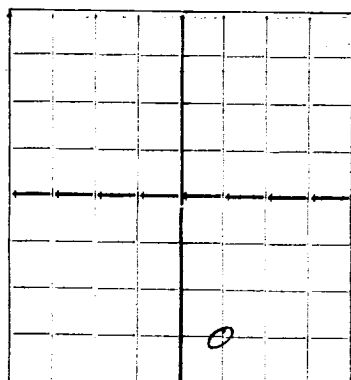


## NEW MEXICO OIL CONSERVATION COMMISSION

Santa Fe, New Mexico

AREA 640 ACRES  
LOCATE WELL CORRECTLY

## WELL RECORD

Mail to Oil Conservation Commission, Santa Fe, New Mexico, or its proper agent not more than twenty days after completion of well. Follow instructions in the Rules and Regulations of the Commission. Indicate questionable data by following it with (?). SUBMIT IN TRIPLICATE.

Stanolind Oil and Gas Company Box "F", Hobbs, New Mexico  
Company or Operator Address  
State E Tract 20 Well No. 11 in SE/4 of Sec. 4, T. 17-S  
Lease  
R. 36-E, N. M. P. M., South Lovington Field, Lea County.  
Well is 660 feet south of the North line and 1980 feet west of the East line of Sec. 4, T-17-S, R-36-E  
If State land the oil and gas lease is No. 13788 Assignment No.  
If patented land the owner is Address  
If Government land the permittee is Address  
The Lessee is Address  
Drilling commenced July 20 1944 Drilling was completed October 8 1944  
Name of drilling contractor Johann Drilling Company Address Artesia, New Mexico  
Elevation above sea level at top of casing 3891 feet.  
The information given is to be kept confidential until 19

## OIL SANDS OR ZONES

No. 1, from 4730 to 5152 No. 4, from to  
No. 2, from to No. 5, from to  
No. 3, from to No. 6, from to

## IMPORTANT WATER SANDS

Include data on rate of water inflow and elevation to which water rose in hole.

No. 1, from to feet.  
No. 2, from to feet.  
No. 3, from to feet.  
No. 4, from to feet.

## CASING RECORD

SIZE	WEIGHT PER FOOT	THREADS PER INCH	MAKE	AMOUNT	KIND OF SHOE	CUT & FILLED FROM	PERFORATED FROM TO	PURPOSE
13"	50#	8V	Used	260	Belled			Surface String
8-5/8"	32#	8V	Used	1960	Baker			Salt "
5 1/2"	14#	8R	New	4658	Larkin			Oil "

## MUDDING AND CEMENTING RECORD

SIZE OF HOLE	SIZE OF CASING	WHERE SET	NO. SACKS OF CEMENT	METHOD USED	MUD GRAVITY	AMOUNT OF MUD USED
17"	13"OD	260	200	Halliburton		
11"	8-5/8"OD	1960	600	"		
7-7/8"	5 1/2"OD	4658	375	"		

## PLUGS AND ADAPTERS

Heaving plug—Material Length Depth Set  
Adapters—Material Size

## RECORD OF SHOOTING OR CHEMICAL TREATMENT

SIZE	SHELL USED	EXPLOSIVE OR CHEMICAL USED	QUANTITY	DATE	DEPTH SHOT OR TREATED	DEPTH CLEANED OUT

Results of shooting or chemical treatment

## RECORD OF DRILL-STEM AND SPECIAL TESTS

If drill-stem or other special tests or deviation surveys were made, submit report on separate sheet and attach hereto.

## TOOLS USED

Rotary tools were used from Surface feet to 5152 TD feet, and from feet to feet  
Cable tools were used from feet to feet, and from feet to feet

## PRODUCTION

Put to producing October 16 1944  
The production of the first 24 hours was 320 barrels of fluid of which 100 % was oil; 0 % emulsion; % water; and 2/10 % sediment. Gravity, Be 35  
If gas well, cu. ft. per 24 hours Gallons gasoline per 1,000 cu. ft. of gas  
Rock pressure, lbs. per sq. in.

## EMPLOYEES

G. H. Carr Driller Frank Ryhart Driller  
Dick Ross Driller

## FORMATION RECORD ON OTHER SIDE

I hereby swear or affirm that the information given herewith is a complete and correct record of the well and all work done on it so far as can be determined from available records.

Subscribed and sworn to before me this 20th Hobbs, New Mexico October 18, 1944  
day of October 1944 Name Rex H. Hendrickson  
Notary Public Position Field Superintendent  
Representing Stanolind Oil and Gas Company  
My Commission expires 5-5-47 Address Box "F", Hobbs, New Mexico

# FORMATION RECORD

FROM	TO	THICKNESS IN FEET	FORMATION
0	40	40	Caliche and Sand.
40	215		Sand and gravel.
215	1805		Red Beds
1805	1820		Red beds and anhydrite
1820	1885		Anhydrite
1885	1907		Red Beds.
1907	2050		Anhydrite
2050	2200		Salt and shells.
2200	2525		Salt and red beds.
2525	3145		Anhydrite and salt.
3145	3754		Anhydrite
3754	4056		Lime and anhydrite
4056	4067		Lime
4067	4125		Lime and anhydrite
4125	4147		Lime
4147	4164		Lime and anhydrite
4164	5152		Lime - Total Depth.