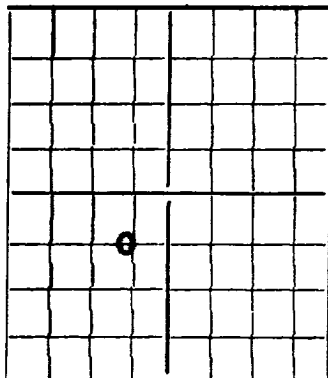


N.

NEW MEXICO OIL CONSERVATION COMMISSION

Santa Fe, New Mexico

AREA 640 ACRES
LOCATE WELL CORRECTLY

WELL RECORD

Mail to Oil Conservation Commission, Santa Fe, New Mexico, or its proper agent not more than twenty days after completion of well. Follow instructions in the Rules and Regulations of the Commission. Indicate questionable data by following it with (?). SUBMIT IN TRIPLICATE. FORM C-110 WILL NOT BE APPROVED UNTIL FORM C-105 IS PROPERLY FILLED OUT.

Fred Turner Jr.,

Box 910, Midland, Texas

Company or Operator

Address

State "B"

Well No. 2

in NE 1/4 SW 1/4

of Sec. 4

T. 17-S

Lease

R. 36-E, N. M. P. M., South Lovington

Field,

Lea

County.

Well is 660 feet south of the North line and 660 feet west of the East line of NE 1/4 Sec 2-17-36

If State land the oil and gas lease is No. B-4119 Assignment No. 6

If patented land the owner is , Address

If Government land the permittee is , Address

The Lessee is Fred Turner, Jr., Address Midland, Texas

Drilling commenced August 10th 1944 Drilling was completed Sept., 26th 1944

Name of drilling contractor Coats Drilg., Co., Address Lubbock, Texas

Elevation above sea level at top of casing 3338' feet. Derrick Floor Elev. 3298

The information given is to be kept confidential until Release immediately 19

OIL SANDS OR ZONES

No. 1, from 4760 to 5150 No. 4, from to
streaks of porosity and saturation
No. 2, from to No. 5, from to
between these depths
No. 3, from to No. 6, from to

IMPORTANT WATER SANDS

Include data on rate of water inflow and elevation to which water rose in hole.

No. 1, from to feet.
No. 2, from to feet.
No. 3, from to feet.
No. 4, from to feet.

CASING RECORD

SIZE	WEIGHT PER FOOT	THREADS PER INCH	MAKE	AMOUNT	KIND OF SHOE	CUT & FILLED FROM	PERFORATED FROM TO	PURPOSE
13 1/2"	50	8	SH	290	TP			
8 5/8"	28	8	J&L	1953	Float	Second hand casing		
5 1/2"	14	8	J&L	4695	Float			
2 3/8"	4.70	8	J&B	5132				

MUDDING AND CEMENTING RECORD

SIZE OF HOLE	SIZE OF CASING	WHERE SET	NO. SACKS OF CEMENT	METHOD USED	MUD GRAVITY	AMOUNT OF MUD USED
17 1/2"	13"	290	200	Plug		
12 1/2"	8 5/8"	1953	100	Plug		
7 7/8"	5 1/2"	4695	400	Plug		

PLUGS AND ADAPTERS

Heaving plug—Material Length Depth Set

Adapters—Material Size

RECORD OF SHOOTING OR CHEMICAL TREATMENT

SIZE	SHELL USED	EXPLOSIVE OR CHEMICAL USED	QUANTITY	DATE	DEPTH SHOT OR TREATED	DEPTH CLEANED OUT

Results of shooting or chemical treatment not shot or treated

RECORD OF DRILL-STEM AND SPECIAL TESTS

If drill-stem or other special tests or deviation surveys were made, submit report on separate sheet and attach hereto.

TOOLS USED

Rotary tools were used from 0 feet to 5150 feet, and from feet to feet

Cable tools were used from feet to feet, and from feet to feet

PRODUCTION

Put to producing Sept., 23th, 1944

The production of the first 24 hours was 600 barrels of fluid of which 100 % was oil; 0 % emulsion; % water; and % sediment. Gravity, Be

If gas well, cu. ft. per 24 hours. Gallons gasoline per 1,000 cu. ft. of gas

Rock pressure, lbs. per sq. in.

EMPLOYEES

W.E. Arms, Driller J.A. Kemnitz, Driller

J.C. Wisdom, Driller

FORMATION RECORD ON OTHER SIDE

I hereby swear or affirm that the information given herewith is a complete and correct record of the well and all work done on it so far as can be determined from available records.

Midland, Texas

Sept., 29th, 1944

Subscribed and sworn to before me this 29th

day of September, 19 44

Name

Position

Authorized agent

Representing

Fred Turner, Jr.,

Company or Operator

My Commission expires 6-1-45

Address

Midland, Texas

FORMATION RECORD

FROM	TO	THICKNESS IN FEET	FORMATION
0	42	42	Caliche
42	273		Gravel and red sand
273	300		Red Sand
300	525		Red Bed
525	760		Red bed and shale
760	1030		Red bed
1030	1180		Red bed
1180	1668		Red bed and shale
1668	1890		Red bed and lime shells
1890	1941		Sand
1941	2120		Anhydrite
2120	2350		Salt
2350	2441		Salt and anhydrite
2441	2840		Salt
2840	2900		Salt and anhydrite shells
2900	3605		Anhydrite
3605	3730		Anhydrite and gyp
3730	3811		Anhydrite
3811	3995		Anhydrite and shells
3995	4610		LIME
4610	4617		Broken lime - show gas
4617	5150		LIME