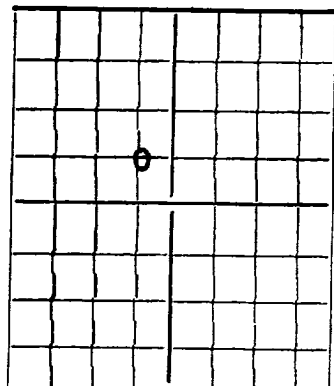


N.

NEW MEXICO OIL CONSERVATION COMMISSION

Santa Fe, New Mexico

AREA 640 ACRES
LOCATE WELL CORRECTLY

Mail to Oil Conservation Commission, Santa Fe, New Mexico, or its proper agent not more than twenty days after completion of well. Follow instructions in the Rules and Regulations of the Commission. Indicate questionable data by following it with (?). SUBMIT IN TRIPLICATE. FORM C-110 WILL NOT BE APPROVED UNTIL FORM C-105 IS PROPERLY FILLED OUT.

WELL RECORD

Fred Turner, Jr.

Midland, Texas

Company or Operator

Address

State
Lease

Well No. C-1

in SE/4 NW/4 of Sec. 4

, T. 17-S

R. 36E, N. M. P. M., So. Lovington

Field,

Lea

County.

Well is 660 feet south of the North line and 660 feet west of the East line of SE/4 NW/4 Sec. 4,

If State land the oil and gas lease is No. B-4286

Assignment No. 1

17S, 36E

If patented land the owner is, Address

If Government land the permittee is, Address

The Lessee is, Address

Drilling commenced June 17, 1944. Drilling was completed August 4, 1944.

Name of drilling contractor Coats Drilling Co., Address Lubbock, Texas

Elevation above sea level at top of casing 3395 feet.

The information given is to be kept confidential until Release Now, 19

OIL SANDS OR ZONES

No. 1, from 4720 to 5183

No. 4, from to

Streaks of Saturation & Porosity

No. 5, from to

No. 2, from between these depths to

No. 6, from to

IMPORTANT WATER SANDS

Include data on rate of water inflow and elevation to which water rose in hole.

No. 1, from to feet.

No. 2, from to feet.

No. 3, from to feet.

No. 4, from to feet.

CASING RECORD

SIZE	WEIGHT PER FOOT	THREADS PER INCH	MAKE	AMOUNT	KIND OF SHOE	CUT & FILLED FROM	PERFORATED FROM TO	PURPOSE
		8	SH	236	TP			
8 5/8"	23#	8	J&L	1977	Float			
5 1/2"	14#	8	J&L	4710	Float			

MUDDING AND CEMENTING RECORD

SIZE OF HOLE	SIZE OF CASING	WHERE SET	NO. SACKS OF CEMENT	METHOD USED	MUD GRAVITY	AMOUNT OF MUD USED
17 1/2"	13"	236	225			
12 1/2"	8 5/8"	1977	100			
7 7/8"	5 1/2"	4710	150			

PLUGS AND ADAPTERS

Heaving plug—Material Length Depth Set

Adapters—Material Size

RECORD OF SHOOTING OR CHEMICAL TREATMENT

SIZE	SHELL USED	EXPLOSIVE OR CHEMICAL USED	QUANTITY	DATE	DEPTH SHOT OR TREATED	DEPTH CLEANED OUT

Results of shooting or chemical treatment

RECORD OF DRILL-STEM AND SPECIAL TESTS

If drill-stem or other special tests or deviation surveys were made, submit report on separate sheet and attach hereto.

TOOLS USED

Rotary tools were used from 0 feet to 5183 feet, and from feet to feet

Cable tools were used from feet to feet, and from feet to feet

PRODUCTION

Put to producing August 4, 1944.

The production of the first 24 hours was 480 barrels of fluid of which 0 % was oil; 100 % emulsion; % water; and % sediment. Gravity, Be 35

If gas well, cu. ft. per 24 hours Gallons gasoline per 1,000 cu. ft. of gas

Rock pressure, lbs. per sq. in.

EMPLOYEES

W. E. Arms, Driller R. M. Kemnitz, Driller

J. G. Wisdom, Driller

FORMATION RECORD ON OTHER SIDE

I hereby swear or affirm that the information given herewith is a complete and correct record of the well and all work done on it so far as can be determined from available records.

Subscribed and sworn to before me this 12

day of August, 1944

Notary Public, Midland, Texas

My Commission expires 6-1-45

Midland, Texas August 12, 1944

Name

Position Authorized Agent

Representing Fred Turner, Jr.

Address Midland, Texas

FORMATION RECORD

FROM	TO	THICKNESS IN FEET	FORMATION
0	30		Red Bed & Caliche
30	40		Red Bed
40	295		Water Sand, Gravel Sand & Rock
295	529		Shale & Red Rock
529	680		Blue Shale & Red Bed
680	772		Red Bed & Shale
772	1420		Red Bed & Shale
1420	1510		Red Bed & Shells
1510	1585		Red Bed Shale & Shells
1585	1675		Shale & Red Bed
1675	1795		Red Bed & Shells & Sand
1795	1830		Red Bed, Shale & Shells
1830	1955		Sand
1955	1937		Anhydrite
1937	2035		Anhydrite
2035	2125		Red Bed
2125	2247		Salt
2247	2230		Anhydrite
2230	2320		Anhy. Redbed & Salt
2320	2460		Salt & Shells
2460	2670		Salt, Anhy. & Shells
2670	3140		Salt, Shells & Anhy.
3140	3175		Gyp & Anhydrite
3175	3260		Gyp, Anhydrite & Shells
3260	3292		Anhydrite & Gyp
3292	3604		Hard Anhydrite
3604	3648		Broken Lime
3648	3730		Lime & Anhydrite
3730	4528		Lime
4528	4558		Lime & Hard Sand
4558	4620		Lime & Gyp
4620	4630		Hard Lime
4630	4645		Lime
4645	4750		Lime
4750	4764		Lime
4764	4730		Oder, Lime
4780	4804		Lime
4804	4826		Oder, Lime
4826	4906		Lime
4906	4910		Oder, Lime
4910	4930		Lime
4980	5010		Lime, Strong Oder
5010	5026		Lime
5026	5037		Lime, Small Oder
5037	5175		Lime
5175	5133		Lime (T.D.)