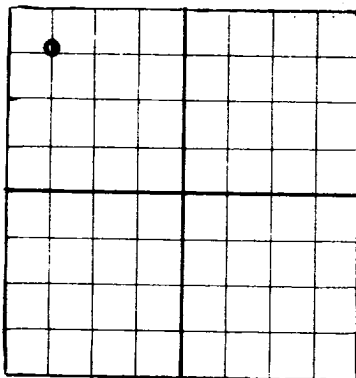


N

AREA 640 ACRES
LOCATE WELL CORRECTLY

NEW MEXICO OIL CONSERVATION COMMISSION

Santa Fe, New Mexico

WELL RECORD

Mail to Oil Conservation Commission, Santa Fe, New Mexico, or its proper agent not more than twenty days after completion of well. Follow instructions in the Rules and Regulations of the Commission. Indicate questionable data by following it with (?). SUBMIT IN TRIPLICATE. FORM C-110 WILL NOT BE APPROVED UNTIL FORM C-105 IS PROPERLY FILLED OUT.

Fred Turner, Jr.,

Midland, Texas

Company or Operator
State "C-4" Well No. 5 in NW1/4 of Sec. 4, T. 17-S
Lease
R. 36-E N. M. P. M. So Levington Field, Lea County.
Well is 660 feet south of the North line and 4620 feet west of the East line of Sec 4., 17-S 36-E
If State land the oil and gas lease is No. B-4286 Assignment No. 1
If patented land the owner is _____ Address _____
If Government land the permittee is _____ Address _____
The Lessee is _____ Address _____
Drilling commenced January 15th 1945 Drilling was completed February 19 1945
Name of drilling contractor Coats & Foster Drilling Co. Address Lubbock, Texas
Elevation above sea level at top of casing 3899 feet.
The information given is to be kept confidential until release now 19____

OIL SANDS OR ZONES

No. 1, from 4765' to 5100' No. 4, from _____ to _____
streaks of porosity and saturation No. 5, from _____ to _____
between these depths No. 6, from _____ to _____

IMPORTANT WATER SANDS

Include data on rate of water inflow and elevation to which water rose in hole.

No. 1, from _____ to _____ feet.
No. 2, from _____ to _____ feet.
No. 3, from _____ to _____ feet.
No. 4, from _____ to _____ feet.

CASING RECORD

SIZE	WEIGHT PER FOOT	THREADS PER INCH	MAKE	AMOUNT	KIND OF SHOE	CUT & FILLED FROM	PERFORATED		PURPOSE
							FROM	TO	
13 3/8	48	8	J&L	282'					
8 5/8	28	8	J&L	2034'	Float				
5 1/2	14	8	J&L	4769'	Float				

MUDDING AND CEMENTING RECORD

SIZE OF HOLE	SIZE OF CASING	WHERE SET	NO. SACKS OF CEMENT	METHOD USED	MUD GRAVITY	AMOUNT OF MUD USED
17 1/4	13 3/8	282	200	cemented		
12 1/8	8 5/8	2034	200	cemented		
7 7/8	5 1/2	4769	400	cemented		

PLUGS AND ADAPTERS

Heaving plug—Material _____ Length _____ Depth Set _____
Adapters—Material _____ Size _____

RECORD OF SHOOTING OR CHEMICAL TREATMENT

SIZE	SHELL USED	EXPLOSIVE OR CHEMICAL USED	QUANTITY	DATE	DEPTH SHOT OR TREATED	DEPTH CLEANED OUT
		Acid	4000	2-21-45	5100'	5100'

Results of shooting or chemical treatment _____

RECORD OF DRILL-STEM AND SPECIAL TESTS

If drill-stem or other special tests or deviation surveys were made, submit report on separate sheet and attach hereto.

TOOLS USED

Rotary tools were used from 0 feet to 5100 feet, and from _____ feet to _____ feet
Cable tools were used from _____ feet to _____ feet, and from _____ feet to _____ feet

PRODUCTION

Put to producing 2-22-45 19____
The production of the first 24 hours was 90 barrels of fluid of which 100 % was oil; 0 % emulsion; 0 % water; and 0 % sediment. Gravity, Be 37°
If gas well, cu. ft. per 24 hours _____ Gallons gasoline per 1,000 cu. ft. of gas _____
Rock pressure, lbs. per sq. in. _____

EMPLOYEES

Frank Pylant _____ Driller Bee E Massey _____ Driller
Don Kennett _____ Driller _____ Driller

FORMATION RECORD ON OTHER SIDE

I hereby swear or affirm that the information given herewith is a complete and correct record of the well and all work done on it so far as can be determined from available records.

Subscribed and sworn to before me this 26 February 45
W. C. MYRICK, Notary Public in and for Midland County, Texas
My Commission expires 6-1-45

Midland, Texas 2-26-45
Name _____
Position Authorized agent
Representing Fred Turner, Jr., Company or Operator
Address Midland, Texas.

FORMATION RECORD

FROM	TO	THICKNESS IN FEET	FORMATION
0	60		Surface
60	1975		Red Beds
1975	2900		Anhydrite
2900	3014		Shale and anhydrite
3014	3155		Salt and anhydrite
3155	3225		Anhydrite and salt
3225	3503		Anhydrite
3503	3900		Anhydrite and shale
3900	3979		Anhydrite and lime shells
3979	4114		Anhydrite and lime
4114	4287		Lime and anhydrite
4287	4440		Anhydrite and lime
4440	4468		Lime and shale
4468	4525		Anhydrite, lime and shale
4525	4569		Lime
4569	4721		Anhydrite and lime
4721	5100		LIME