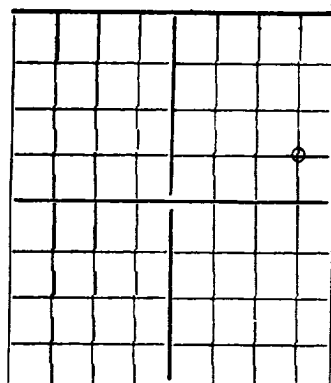


N.

AREA 640 ACRES  
LOCATE WELL CORRECTLY

## NEW MEXICO OIL CONSERVATION COMMISSION

Santa Fe, New Mexico

HOBBBS OFFICE

## WELL RECORD

Mail to Oil Conservation Commission, Santa Fe, New Mexico, or its proper agent not more than twenty days after completion of well. Follow instructions in the Rules and Regulations of the Commission. Indicate questionable data by following it with (?). SUBMIT IN TRIPPLICATE. FORM C-110 WILL NOT BE APPROVED UNTIL FORM C-105 IS PROPERLY FILLED OUT.

Fred Turner, Jr.

Midland, Texas

Company or Operator

Address

State 5-5

Well No. 2

in SE/4 NE/4

of Sec. 5

T. 17-S

Lease

R. 36-E

N. M. P. M., So. Lovington

Field,

Les

County.

Well is 1930 feet south of the North line and 660 feet west of the East line of Section 5, 17S, 36E

If State land the oil and gas lease is No. 8-4236 Assignment No. 1

If patented land the owner is, Address

If Government land the permittee is, Address

The Lessee is, Address

Drilling commenced October 27 1944 Drilling was completed November 29 1944

Name of drilling contractor Coats Drilling Co., Address Lubbock, Texas

Elevation above sea level at top of casing 3902 feet.

The information given is to be kept confidential until release now 19

## OIL SANDS OR ZONES

No. 1, from 4750 to 5150 No. 4, from to

Streaks of saturation and porosity

No. 5, from to

No. 3, from to No. 6, from to

## IMPORTANT WATER SANDS

Include data on rate of water inflow and elevation to which water rose in hole.

No. 1, from to feet.

No. 2, from to feet.

No. 3, from to feet.

No. 4, from to feet.

## CASING RECORD

SIZE	WEIGHT PER FOOT	THREADS PER INCH	MAKE	AMOUNT	KIND OF SHOE	CUT & FILLED FROM	PERFORATED FROM TO	PURPOSE
13 3/8"	43	8	JAL	300'				
8 5/8"	24	8	JAL	1930'	Float			
8 1/2"	14	8	JAL	4740'	Float			

## MUDDING AND CEMENTING RECORD

SIZE OF HOLE	SIZE OF CASING	WHERE SET	NO. SACKS OF CEMENT	METHOD USED	MUD GRAVITY	AMOUNT OF MUD USED
14 1/2"	13 3/8"	300	200	Cemented		
10 5/4"	8 5/8"	1930	200	Cemented		
7 5/8"	8 1/2"	4740	350	Cemented		

## PLUGS AND ADAPTERS

Heaving plug—Material none Length Depth Set

Adapters—Material Size

## RECORD OF SHOOTING OR CHEMICAL TREATMENT

SIZE	SHELL USED	EXPLOSIVE OR CHEMICAL USED	QUANTITY	DATE	DEPTH SHOT OR TREATED	DEPTH CLEANED OUT
		NOT SHOT OR ADJUSTED				

Results of shooting or chemical treatment

## RECORD OF DRILL-STEM AND SPECIAL TESTS

If drill-stem or other special tests or deviation surveys were made, submit report on separate sheet and attach hereto.

## TOOLS USED

Rotary tools were used from 0 feet to 5150 feet, and from feet to feet

Cable tools were used from feet to feet, and from feet to feet

## PRODUCTION

Put to producing November 29 1944

The production of the first 24 hours was 500 barrels of fluid of which % was oil; %

emulsion; % water; and % sediment. Gravity, Be

If gas well, cu. ft. per 24 hours Gallons gasoline per 1,000 cu. ft. of gas

Rock pressure, lbs. per sq. in.

## EMPLOYEES

J. C. Hamilton, Driller J. C. Massey, Driller

Don Bennett, Driller

## FORMATION RECORD ON OTHER SIDE

I hereby swear or affirm that the information given herewith is a complete and correct record of the well and all work done on it so far as can be determined from available records.

Subscribed and sworn to before me this 4 day of December 1944

Name J. C. Hamilton

Position Notary Public

Representing Fred Turner, Jr.

My Commission expires 6-1-45 Address Midland, Texas

## FORMATION RECORD

FROM	TO	THICKNESS IN FEET	FORMATION
0	320		Surface
320	510		Red Beds
510	913		Red Beds & Gyp
913	1340		Red Beds
1340	1399		Shale & Shells
1399	1745		Red Beds
1745	1810		Shale & Sand
1810	1950		Red Beds
1950	1955		Shale
1955	2120		Anhydrite
2120	2270		Anhydrite & Salt
2270	2775		Anhydrite & broken Shale
2775	3105		Salt & Anhydrite
3105	3350		Anhydrite & Gyp
3350	3445		Anhydrite & shale
3445	3499		Anhydrite
3499	3640		Anhydrite & Gyp
3640	3855		Anhydrite & Shale
3855	3950		Anhydrite & Gyp
3950	4170		Anhydrite
4170	4208		Lime & Gyp
4208	4285		Anhydrite
4285	4315		Lime & Gyp
4315	4413		Anhydrite
4413	4465		Lime & Gyp
4465	4510		Anhydrite
4510	4555		Anhydrite & Lime
4555	4595		Lime
4595	4618		Anhydrite
4618	4726		Lime
4726	4740		Grey Lime
4740	5150		Lime