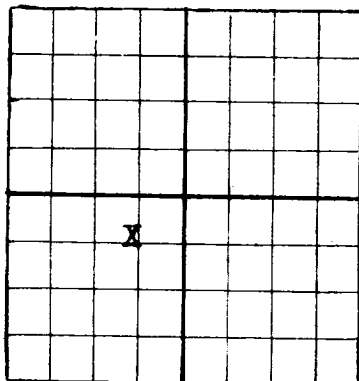


N

NEW MEXICO OIL CONSERVATION COMMISSION

Santa Fe, New Mexico

AREA 640 ACRES
LOCATE WELL CORRECTLY

WELL RECORD

Mail to Oil Conservation Commission, Santa Fe, New Mexico, or its proper agent not more than twenty days after completion of well. Follow instructions in the Rules and Regulations of the Commission. Indicate questionable data by following it with (?). SUBMIT IN TRIPLICATE. FORM C-110 WILL NOT BE APPROVED UNTIL FORM C-105 IS PROPERLY FILLED OUT.

L.H. Wentz (Oil Division) Ponca City, Oklahoma
Company or Operator Address
State B Well No. 4 in _____ of Sec. 5, T. 17S
Lease
R. 36E N. M. P. M., West Lovington Field, Lea County.
Well is 660 feet south of the North line and 660 feet west of the East line of S.W. 1/4 of S. 5-17S-36E
If State land the oil and gas lease is No. B-4119 Assignment No. 5
If patented land the owner is _____, Address _____
If Government land the permittee is _____, Address _____
The Lessee is L.H. Wentz (Oil Division), Address Ponca City, Oklahoma
Drilling commenced 5-12-45 19____ Drilling was completed 6-17-45 19____
Name of drilling contractor Spencer and Turner, Address Midland, Texas
Elevation above sea level at top of casing 3912 feet.
The information given is to be kept confidential until _____ 19____

OIL SANDS OR ZONES

No. 1, from 4786 to 4875 No. 4, from 4980 to 4985
No. 2, from 4880 to 4887 No. 5, from 5020 to 5024
No. 3, from 4942 to 4950 No. 6, from 5033 to 5048

IMPORTANT WATER SANDS

Include data on rate of water inflow and elevation to which water rose in hole.

No. 1, from _____ to _____ feet.
No. 2, from _____ to _____ feet.
No. 3, from _____ to _____ feet.
No. 4, from _____ to _____ feet.

CASING RECORD

SIZE	WEIGHT PER FOOT	THREADS PER INCH	MAKE	AMOUNT	KIND OF SHOE	CUT & FILLED FROM	PERFORATED		PURPOSE
							FROM	TO	
13 3/8	487	8	Seam	299	None				
8 5/8	287	8	"	1989	Baker				
5 1/2	14-17	8	"	4740	"				

MUDDING AND CEMENTING RECORD

SIZE OF HOLE	SIZE OF CASING	WHERE SET	NO. SACKS OF CEMENT	METHOD USED	MUD GRAVITY	AMOUNT OF MUD USED
17"	13 3/8	299	190	Halliburton		
11 1/2	8 5/8	1989	150	"		
7 7/8	5 1/2	4740	150	"		

PLUGS AND ADAPTERS

Heaving plug—Material _____ Length _____ Depth Set _____
Adapters—Material _____ Size _____

RECORD OF SHOOTING OR CHEMICAL TREATMENT

SIZE	SHELL USED	EXPLOSIVE OR CHEMICAL USED	QUANTITY	DATE	DEPTH SHOT OR TREATED	DEPTH CLEANED OUT

Results of shooting or chemical treatment _____

RECORD OF DRILL-STEM AND SPECIAL TESTS

If drill-stem or other special tests or deviation surveys were made, submit report on separate sheet and attach hereto.

TOOLS USED

Rotary tools were used from 0 feet to 5085 feet, and from _____ feet to _____ feet
Cable tools were used from _____ feet to _____ feet, and from _____ feet to _____ feet

PRODUCTION

Put to producing 6-20-45 19____
The production of the first 24 hours was 300 barrels of fluid of which 100 % was oil None %
emulsion; No % water; and _____ % sediment. Gravity, Ba. 37
If gas well, cu. ft. per 24 hours _____ Gallons gasoline per 1,000 cu. ft. of gas _____
Rock pressure, lbs. per sq. in. _____

EMPLOYEES

Bee E Massey, Driller B.T. Rushing, Driller
O.G. Marker, Driller _____, Driller _____

FORMATION RECORD ON OTHER SIDE

I hereby swear or affirm that the information given herewith is a complete and correct record of the well and all work done on it so far as can be determined from available records.

Subscribed and sworn to before me this 20th6-19-45 Lovington, New Mexicoday of June 1945Name W.W. DavisPosition General Superintendent

Notary Public

Representing L.H. Wentz (Oil Division)

Company or Operator

My Commission expires Aug 28-1948Address Ponca City, Oklahoma

FORMATION RECORD

FROM	TO	THICKNESS IN FEET	FORMATION
0	40	40	Caliche
40	270	230	Sand
270	315	85	Shale and Shells
315	550	245	Shale Red Bed and Shells
550	797	247	Shale and Red Bed
797	1109	312	Shale Red Bed and Shells
1109	1345	236	Shale and Red Bed
1345	1446	101	Shale and Red Bed
1446	1487	41	Shale and Shells
1487	1865	378	Shale Shells and Red Bed
1865	1877	12	Sand and Red Bed
1877	1932	55	Shale Red Bed and Shells
1932	1970	38	Shale and Anhydrite Shells
1970	2065	95	Anhydrite
2065	2215	155	Salt Red Bed and Shale
2215	2233	18	Salt
2233	3070	847	Salt Anhydrite and Shells
3070	3158	88	Salt and Anhydrite
3158	3220	62	Anhydrite Shale and Shells
3220	3392	172	Anhydrite
3392	3485	93	Anhydrite and Shale
3485	3545	60	Broken Anhydrite
3545	3610	55	Anhydrite and Shale
3610	3660	50	Anhydrite Gyp and Shale
3660	4735	75	Anhydrite and Shale
3735	3906	171	Anhydrite Gyp and Shale
3906	3951	45	Anhydrite
3951	4440	489	Anhydrite and Gyp
4440	4471	31	Anhydrite and Lime
4471	4513	42	Anhydrite Gyp and Lime
4513	4598	85	Anhydrite and Lime
4598	4616	18	Anhydrite Lime and Gyp
4616	4639	23	Anhydrite and Lime
4639	4671	32	Anhydrite and Gyp
4671	4691	20	Anhydrite Gyp and Lime
4691	4708	17	Anhydrite and Lime
4708	5085	377	Lime

TD 5085