


NEW MEXICO OIL CONSERVATION COMMISSION

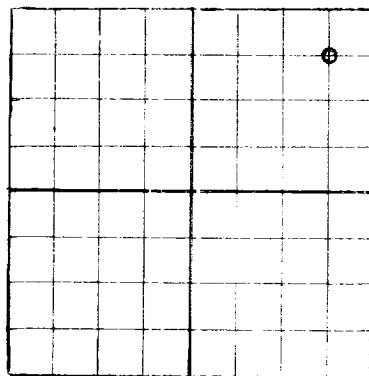

Santa Fe, New Mexico

WELL RECORD

Mail to Oil Conservation Commission, Santa Fe, New Mexico, or its proper agent not more than twenty days after completion of well. Follow instructions in the Rules and Regulations of the Commission. Indicate questionable data by following it with (?). SUBMIT IN TRIPPLICATE. FORM C-110 WILL NOT BE APPROVED UNTIL FORM C-105 IS PROPERLY FILLED OUT.

The Texas Company Box 1720 Fort Worth 1, Texas
 Company or Operator Address
 State of New Mexico Well No. 2 in NE 1/4 NE 1/4 of Sec. 7, T. 17-S
 Lease
 R. 36-E N. M. P. M. South Lovington Field, Lea County.
 Well is 660 feet south of the North line and 660 feet west of the East line of Section 7
 If State land the oil and gas lease is No. B-4120 Assignment No. 1
 If patented land the owner is -- Address --
 If Government land the permittee is -- Address --
 The Lessee is The Texas Company Address Box 2332 Houston, Texas
 Drilling commenced November 24, 1944 Drilling was completed December 23, 1944
 Name of drilling contractor McQueen & Clevenger Address First National Bank Bldg.
 Elevation above sea level 3912 feet. Derrick Floor Fort Worth, Texas
 The information given is to be kept confidential until 19 --

OIL SANDS OR ZONES

No. 1, from 4770' to 5160' No. 4, from -- to --
 No. 2, from -- to -- No. 5, from -- to --
 No. 3, from -- to -- No. 6, from -- to --

IMPORTANT WATER SANDS

Include data on rate of water inflow and elevation to which water rose in hole.

No. 1, from -- to -- feet. --
 No. 2, from -- to -- feet. --
 No. 3, from -- to -- feet. --
 No. 4, from -- to -- feet. --

CASING RECORD

SIZE	WEIGHT PER FOOT	THREADS PER INCH	MAKE	AMOUNT	KIND OF SHOE	CUT & FILLED FROM	PERFORATED		PURPOSE
							FROM	TO	
13-3/8	48 1/2	8Rd	Smls	191	Reg. Pattern	--	--	--	--
8-5/8	28 1/2	8Rd	Smls	2011	Baker Guide	--	--	--	--
5-1/2	14 1/2	8Rd	Smls	4752	Baker Guide	--	--	--	--

MUDDING AND CEMENTING RECORD

SIZE OF HOLE	SIZE OF CASING	WHERE SET	NO. SACKS OF CEMENT	METHOD USED	MUD GRAVITY	AMOUNT OF MUD USED
16"	13-3/8	204	250	Halliburton	--	--
11-1/2"	8-5/8	2008	150	Halliburton	--	--
7"	5-1/2	4727	200	Halliburton	--	--

PLUGS AND ADAPTERS

Heaving plug—Material -- Length -- Depth Set --
 Adapters—Material -- Size --

RECORD OF SHOOTING OR CHEMICAL TREATMENT

SIZE	SHELL USED	EXPLOSIVE OR CHEMICAL USED	QUANTITY	DATE	DEPTH SHOT OR TREATED	DEPTH CLEANED OUT
		None				

Results of shooting or chemical treatment Well was neither shot nor acidized.

RECORD OF DRILL-STEM AND SPECIAL TESTS

If drill-stem or other special tests or deviation surveys were made, submit report on separate sheet and attach hereto.

TOOLS USED

Rotary tools were used from 0 feet to 5160 feet, and from -- feet to -- feet
 Cable tools were used from -- feet to -- feet, and from -- feet to -- feet

PRODUCTION

Put to producing December 29, 1944
 The production of the first 5 hours was 77 barrels of fluid of which 100 % was oil; -- % emulsion; -- % water; and -- % sediment. Gravity, API 34.5
 If gas well, cu. ft. per 24 hours -- Gallons gasoline per 1,000 cu. ft. of gas --
 Rock pressure, lbs. per sq. in. -- GCR 560

EMPLOYEES

Wayne Ballew Driller D. E. Spoonmore Driller
 Tom Childress Driller

FORMATION RECORD ON OTHER SIDE

I hereby swear or affirm that the information given herewith is a complete and correct record of the well and all work done on it so far as can be determined from available records.

Subscribed and sworn to before me this 17th day of January 1945 at Midland, Texas January 17, 1945
 Name: P. F. [Signature]
 Position: District Superintendent
 Representing: The Texas Company
 Address: Box 1270 Midland, Texas
 My Commission expires June 1, 1945
 Notary Public: Maxine Hays

FORMATION RECORD

FROM	TO	THICKNESS IN FEET	FORMATION
0	185	185	Surface, Sand & Gravel
185	1145	960	Red Beds
1145	1570	425	Red Beds & Shale
1570	1887	317	Red Beds & Shells
1887	1949	62	Red Beds & Shale
1949	2020	71	Anhydrite
2020	2695	675	Anhydrite & Salt
2695	2960	265	Salt & Red Rock Shells
2960	3145	185	Anhydrite & Salt
3145	3882	737	Anhydrite & Gyp
3882	3935	53	Anhydrite
3935	4042	107	Anhydrite & Gyp
4042	4332	290	Anhydrite
4332	4421	89	Anhydrite & Gyp
4421	4546	125	Anhydrite & Lime
4546	4770	224	Lime
4770	5160	390	Saturated Lime
		5160	TOTAL DEPTH

All depths measured from Rotary Table or 10' above ground.

Reduced hole at 4730' to 4-3/4".

DEVIATION TESTS

500' - 0°	2500' - 0°
1000' - 0°	3000' - 3/4°
1300' - 0°	3500' - 1/2°
1800' - 1/2°	4000' - 0°
	4500' - 0°