


N.

## NEW MEXICO OIL CONSERVATION COMMISSION

Santa Fe, New Mexico

## WELL RECORD

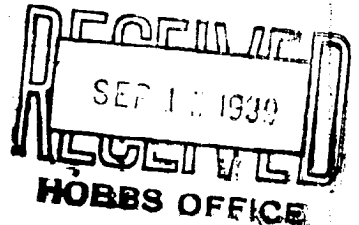

Mail to Oil Conservation Commission, Santa Fe, New Mexico, or its proper agent not more than twenty days after completion of well. Follow instructions in the Rules and Regulations of the Commission. Indicate questionable data by following it with (?). SUBMIT IN TRIPLICATE.

DUPLICATE

United Producing Co., Inc.

Monroe, Louisiana

Company or Operator

Address

C. S. Caylor

Well No. 2 in SE 1/4 of Sec. 6, T. 17S

Lease

R. 37E, N. M. P. M., S. Lovington Field, Lea County.

Well is 4290' feet south of the North line and 600 feet west of the East line of Sec. 6

If State land the oil and gas lease is No. Assignment No.

If patented land the owner is C. S. Caylor, Address Lovington, New Mexico

If Government land the permittee is, Address

The Lessee is United Producing Co., Inc., Address Monroe, Louisiana

Drilling commenced August 5, 1939. Drilling was completed Sept. 8, 1939

Name of drilling contractor Olson Drilling Co., Address Tulsa, Oklahoma

Elevation above sea level at top of casing ? feet.

The information given is to be kept confidential until 19

## OIL SANDS OR ZONES

No. 1, from 4600' to 4945' No. 4, from to

No. 2, from to No. 5, from to

No. 3, from to No. 6, from to

## IMPORTANT WATER SANDS

Include data on rate of water inflow and elevation to which water rose in hole.

No. 1, from to feet.

No. 2, from to feet.

No. 3, from to feet.

No. 4, from to feet.

## CASING RECORD

SIZE	WEIGHT PER FOOT	THREADS PER INCH	MAKE	AMOUNT	KIND OF SHOE	CUT & FILLED FROM	PERFORATED FROM TO	PURPOSE
13"	40#	8	LW	31319'				
9-5/8"	36#	8	LW	297413'				
7"	24#	10	SS	462813'				
Tubing								
2" ID	4.7#	10	SS	470016'				

## MUDDING AND CEMENTING RECORD

SIZE OF HOLE	SIZE OF CASING	WHERE SET	NO. SACKS OF CEMENT	METHOD USED	MUD GRAVITY	AMOUNT OF MUD USED
15"	13"	310'	250	Halliburton		
10 1/2"	9-5/8"	2950'	300	"		
8 1/2"	7"	4590'	300	"		
Tubing		2"	4668'	Swung		

## PLUGS AND ADAPTERS

Heaving plug—Material Length Depth Set

Adapters—Material Size

## RECORD OF SHOOTING OR CHEMICAL TREATMENT

SIZE	SHELL USED	EXPLOSIVE OR CHEMICAL USED	QUANTITY	DATE	DEPTH SHOT OR TREATED	DEPTH CLEANED OUT

Results of shooting or chemical treatment

## RECORD OF DRILL-STEM AND SPECIAL TESTS

If drill-stem or other special tests or deviation surveys were made, submit report on separate sheet and attach hereto.

## TOOLS USED

Rotary tools were used from Top feet to 4945 feet, and from feet to feet

Cable tools were used from feet to feet, and from feet to feet

## PRODUCTION

Put to producing SEPTEMBER 9, 1939

The production of the first 24 hours was 135 barrels of fluid of which 100 % was oil; %

emulsion; % water; and % sediment. Gravity, Be

If gas well, cu. ft. per 24 hours Gallons gasoline per 1,000 cu. ft. of gas

Rock pressure, lbs. per sq. in.

## EMPLOYEES

Paul Speaks, Driller John Pierce, Driller

Pete Green, Driller

## FORMATION RECORD ON OTHER SIDE

I hereby swear or affirm that the information given herewith is a complete and correct record of the well and all work done on it so far as can be determined from available records.

Subscribed and sworn to before me this 12

Hobbs, New Mex. September 12, 1939

day of September, 1939

Name S. A. Smealey

Position District Superintendent

Representing SKELLY OIL CO., Operator for

Company or Operator United Prod. Co.

My Commission expires Dec. 10, 1940

Address Drawer "D", Hobbs, New Mexico

## FORMATION RECORD

FROM	TO	THICKNESS IN FEET	FORMATION
Top	45	45	Saliche
45	100	55	Sand & Gravel
100	250	150	Sand & Streaks of Red Bed
250	313	63	Red Bed
313	1690	1377	Red Bed & Shells
1690	1715	25	Red Rock
1715	1825	110	Red Bed & Shells
1825	1850	25	Red Rock
1850	1900	50	Anhydrite
1900	2010	110	Red Rock & Shells
2010	2123	113	Anhydrite
2123	2350	227	Salt & Streaks of Anhydrite
2350	2540	190	Salt, Anhydrite & Shells
2540	2714	174	Salt & Anhydrite
2714	2830	116	Anhydrite & Salt Streaks
2830	2864	34	Anhydrite
2864	2952	88	Anhydrite & Shale
2952	3084	132	Anhydrite & Shale
3084	3540	456	Anhydrite & Gypsum
3540	3567	27	Sand & Anhydrite
3567	3667	100	Anhydrite, Gypsum & Sand
3667	3840	173	Anhydrite & Gypsum
3840	3855	15	Anhydrite, Hard
3855	4045	190	Anhydrite & Gypsum
4045	4400	355	Anhydrite & Lime
4400	4526	126	Lime
4526	4590	64	Grey Lime
4590	4709	119	Lime
4709	4724	15	Lime, Hard
4724	4750	26	Lime
4750	4765	15	Lime, Hard
4765	4945	180	Lime,