


N.

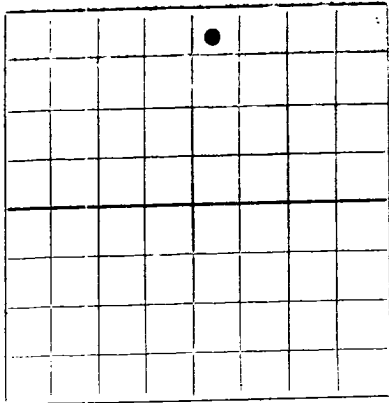

NEW MEXICO OIL CONSERVATION COMMISSION

Santa Fe, New Mexico

WELL RECORD

Mail to District Office, Oil Conservation Commission, to which Form C-101 was sent not later than twenty days after completion of well. Follow instructions in Rules and Regulations of the Commission. Submit in QUINTUPLICATE.

AREA 640 ACRES
LOCATE WELL CORRECTLY

Sinclair Oil & Gas Company

(Company or Operator)

State #335

(Lease)

Well No. 1, in NW 1/4 of NE 1/4, of Sec. 9, T. 17-S, R. 37-E, NMPM.

E. Livingston (Padlock) Wildcat

Pool,

Lea

County.

Well is 330 feet from North line and 2310 feet from East line of Section 9. If State Land the Oil and Gas Lease No. is

Drilling Commenced 9-6-53, 19. Drilling was Completed 10-21-53, 19.

Name of Drilling Contractor Frisbie & Yancey Drilling Company

Address Tulsa, Oklahoma

Elevation above sea level at Top of Tubing Head 3771. The information given is to be kept confidential until

OIL SANDS OR ZONES

No. 1, from None to No. 4, from to
No. 2, from to No. 5, from to
No. 3, from to No. 6, from to

IMPORTANT WATER SANDS

Include data on rate of water inflow and elevation to which water rose in hole.

No. 1, from None to feet.
No. 2, from to feet.
No. 3, from to feet.
No. 4, from to feet.

CASING RECORD

SIZE	WEIGHT PER FOOT	NEW OR USED	AMOUNT	KIND OF SHOE	CUT AND PULLED FROM	PERFORATIONS	PURPOSE
13 3/8	48	N	273	Larkin			
9 5/8	34	N	3373	"	760		

MUDDING AND CEMENTING RECORD

SIZE OF HOLE	SIZE OF CASING	WHERE SET	NO. SACKS OF CEMENT	METHOD USED	MUD GRAVITY	AMOUNT OF MUD USED
17 1/2	13 3/8	276	450	Halliburton		
12 1/4	9 5/8	3374	1100	"		

RECORD OF PRODUCTION AND STIMULATION

(Record the Process used, No. of Qts. or Gals. used, interval treated or shot.)

Result of Production Stimulation Well was plugged and abandoned 10-23-53

Orig: 4 cc: OCC
cc: VDA, JTR, EGC, HAM, File

Depth Cleaned Out 6500

RE ID OF DRILL-STEM AND SPECIAL TESTS

If drill-stem or other special tests or deviation surveys were made, submit report on separate sheet and attach hereto

TOOLS USED

Rotary tools were used from Surface feet to 6500 feet, and from feet to feet.
Cable tools were used from feet to feet, and from feet to feet.

PRODUCTION

Put to Producing Plugged & abandoned 10-23-53

OIL WELL: The production during the first 24 hours was barrels of liquid of which was oil; % was emulsion; % water; and % was sediment. A.P.I. Gravity

GAS WELL: The production during the first 24 hours was M.C.F. plus barrels of liquid Hydrocarbon. Shut in Pressure lbs.
Length of Time Shut in

PLEASE INDICATE BELOW FORMATION TOPS (IN CONFORMANCE WITH GEOGRAPHICAL SECTION OF STATE):

Southeastern New Mexico			Northwestern New Mexico		
T. Anhy.	2017		T. Devonian		T. Ojo-Alamo
T. Salt			T. Silurian		T. Kirtland-Fruitland
B. Salt			T. Montoya		T. Farmington
T. Yates	3187		T. Simpson		T. Pictured Cliffs
T. 7 Rivers	3375		T. McKee		T. Menefee
T. Queen			T. Ellenburger		T. Point Lookout
T. Grayburg			T. Gr. Wash		T. Mancos
T. San Andres	4853		T. Granite		T. Dakota
T. Glorieta	6336		T.		T. Morrison
T. Drinkard			T.		T. Penn.
T. Tubbs			T.		T.
T. Abo			T.		T.
T. Penn.			T.		T.
T. Miss.			T.		T.

FORMATION RECORD

From	To	Thickness in Feet	Formation	From	To	Thickness in Feet	Formation
0	40	40	Caliche				
40	85	45	Sand & Caliche				
85	200	115	Sand, shale & Redbed				
200	250	50	Redbed & Sand				
250	1510	1260	Redbed & shale				
1510	1958	448	Anhydrite & Shale				
1958	1998	40	Sand & Redbed				
1998	2210	212	Anhydrite & Sand				
2210	3101	891	Anhydrite & Salt				
3101	4125	1024	Anhydrite & Gyp				
4125	4759	634	Anhydrite & lime				
4759	6500	1741	Lime				

ATTACH SEPARATE SHEET IF ADDITIONAL SPACE IS NEEDED

I hereby swear or affirm that the information given herewith is a complete and correct record of the well and all work done on it so far as can be determined from available records.

December 11, 1953
Company or Operator Sinclair Oil & Gas Company Address Box 1927 Hobbs, New Mexico
Name G. S. Suter Position or Title Dist. Supt.