

## DISTRICT I

P.O. Box 1980, Hobbs, NM 88241-1980

## DISTRICT II

P.O. Box Drawer DD, Artesia, NM 88211-0719

## DISTRICT III

1000 Rio Brazos Rd., Aztec, NM 87410

## DISTRICT IV

P.O. Box 2088, Santa Fe, NM 87504-2088

State of New Mexico  
Energy, Minerals and Natural Resources Department

## OIL CONSERVATION DIVISION

P.O. Box 2088  
Santa Fe, New Mexico 87504-2088

Form C-101

Revised February 10, 1994

Instructions on back

Submit to Appropriate District Office

State Lease - 6 Copies

Fee Lease - 5 Copies

☐ AMENDED REPORT

## APPLICATION FOR PERMIT TO DRILL, RE-ENTER, DEEPEN, PLUGBACK, OR ADD A ZONE

|                                                                                                                  |                                                         |                                         |
|------------------------------------------------------------------------------------------------------------------|---------------------------------------------------------|-----------------------------------------|
| <sup>1</sup> Operator Name and Address<br>TEXACO EXPLORATION & PRODUCTION INC.<br>205 E. Bender, HOBBS, NM 88240 |                                                         | <sup>2</sup> OGRID Number<br>022351     |
| <sup>4</sup> Property Code<br>011125                                                                             | <sup>5</sup> Property Name<br>VACUUM GLORIETA WEST UNIT | <sup>3</sup> API Number<br>30 025 20778 |
|                                                                                                                  |                                                         | <sup>6</sup> Well No.<br>84             |

<sup>7</sup> Surface Location

| UI or lot no. | Section | Township | Range | Lot.Idn | Feet From The | North/South Line | Feet From The | East/West Line | County |
|---------------|---------|----------|-------|---------|---------------|------------------|---------------|----------------|--------|
| I             | 35      | 17S      | 34E   |         | 560           | EAST             | 2080          | SOUTH          | LEA    |

<sup>8</sup> Proposed Bottom Hole Location If Different From Surface

| UI or lot no.                                                     | Section | Township | Range   | Lot.Idn | Feet From The                 | North/South Line | Feet From The | East/West Line | County  |
|-------------------------------------------------------------------|---------|----------|---------|---------|-------------------------------|------------------|---------------|----------------|---------|
| L/I                                                               | 36/35   | 17S/17S  | 34E/34E |         | 2080/2080'                    | S/S              | 340'/1160'    | W/E            | LEA/LEA |
| <sup>9</sup> Proposed Pool 1<br>Vacuum Glorieta unitized interval |         |          |         |         | <sup>10</sup> Proposed Pool 2 |                  |               |                |         |

|                                   |                                          |                                    |                                     |                                               |
|-----------------------------------|------------------------------------------|------------------------------------|-------------------------------------|-----------------------------------------------|
| <sup>11</sup> Work Type Code<br>P | <sup>12</sup> WellType Code<br>O         | <sup>13</sup> Rotary or C.T.<br>R  | <sup>14</sup> Lease Type Code<br>S  | <sup>15</sup> Ground Level Elevation<br>4002' |
| <sup>16</sup> Multiple<br>No      | <sup>17</sup> Proposed Depth<br>5940'TVD | <sup>18</sup> Formation<br>Paddock | <sup>19</sup> Contractor<br>Unknown | <sup>20</sup> Spud Date<br>6/1/98             |

<sup>21</sup> Proposed Casing and Cement Program

| SIZE OF HOLE | SIZE OF CASING | WEIGHT PER FOOT | SETTING DEPTH | SACKS OF CEMENT | EST. TOP |
|--------------|----------------|-----------------|---------------|-----------------|----------|
| No change    |                |                 |               |                 |          |
|              |                |                 |               |                 |          |
|              |                |                 |               |                 |          |
|              |                |                 |               |                 |          |
|              |                |                 |               |                 |          |

<sup>22</sup> Describe the proposed program. If this application is to DEEPEN or PLUG BACK give the data on the present productive zone and proposed new productive zone. Describe the blowout prevention program, if any. Use additional sheets if necessary.

Objective: Texaco intends on drilling dual lateral horizontal intervals from the existing vertical wellbore.

1. MIRU pulling unit. TOH with submersible pumping equipment. RIH with permanent packer to be set at 5799'. TIH with latch, and multi lateral re-entry whipstock (window will be from 5789'-5796'). KOP = 5800'.
2. Drill a short radius curve using a 4-3/4" drill bit to a MD of 6014' and TVD of 5940'.
3. Drill a 600' horizontal lateral interval with azimuth of 270 degrees.
4. Retrieve whipstock. TIH with a latch, space out assembly, and another whipstock (the window will be from 5759'-5766'). KOP = 5770'.
5. Drill a short radius curve using 4-3/4" drill bit to a MD of 6041 and a TVD of 5940'.
6. Drill a 900' horizontal lateral with azimuth of 90 degrees. TOH with drilling equipment.
7. Rig up coiled tubing unit. Acid treat horizontal lateral with 15% HCL acid.
8. Place well on test and return to production.

Permit for 1 Year From Approval  
Drilling Underway  
Plug Back

<sup>23</sup> I hereby certify that the rules and regulations of the Oil Conservation Division have been complied with and that the information given above is true and complete to the best of my knowledge and belief.

Signature *Darrell J. Carriger*

Printed Name Darrell J. Carriger

Title Prod. Engineer

Date 4/27/98

Telephone 397-0426

## OIL CONSERVATION DIVISION

Approved By: *WILLIAMS*

Title:

Approval Date:

Expiration Date:

Conditions of Approval:  
Attached ☐

## DISTRICT I

P.O. Box 1980, Hobbs, NM 88241-1980

## DISTRICT II

P.O. Box Drawer DD, Artesia, NM 88211-0719

## DISTRICT III

1000 Rio Brazos Rd., Aztec, NM 87410

## DISTRICT IV

P.O. Box 2088, Santa Fe, NM 87504-2088

State of New Mexico  
Energy, Minerals and Natural Resources Department

## OIL CONSERVATION DIVISION

P.O. Box 2088  
Santa Fe, New Mexico 87504-2088

Form C-102

Revised February 10, 1994

Instructions on back

Submit to Appropriate District Office

State Lease - 4 Copies

Fee Lease - 3 Copies

☐ AMENDED REPORT

## WELL LOCATION AND ACREAGE DEDICATION PLAT


|                                       |                                                                   |                                           |
|---------------------------------------|-------------------------------------------------------------------|-------------------------------------------|
| <sup>1</sup> API Number<br>3002520778 | <sup>2</sup> Pool Code<br>62160                                   | <sup>3</sup> Pool Name<br>VACUUM GLORIETA |
| <sup>4</sup> Property Code<br>011125  | <sup>5</sup> Property Name<br>VACUUM GLORIETA WEST UNIT           | <sup>6</sup> Well No.<br>84               |
| <sup>7</sup> OGRID Number<br>022351   | <sup>8</sup> Operator Name<br>TEXACO EXPLORATION & PRODUCTION INC | <sup>9</sup> Elevation                    |

<sup>10</sup> Surface Location

|                    |               |                 |              |         |                      |                          |                       |                         |               |
|--------------------|---------------|-----------------|--------------|---------|----------------------|--------------------------|-----------------------|-------------------------|---------------|
| Ul or lot no.<br>1 | Section<br>35 | Township<br>17S | Range<br>34E | Lot.Idn | Feet From The<br>560 | North/South Line<br>EAST | Feet From The<br>2080 | East/West Line<br>SOUTH | County<br>LEA |
|--------------------|---------------|-----------------|--------------|---------|----------------------|--------------------------|-----------------------|-------------------------|---------------|

<sup>11</sup> Bottom Hole Location If Different From Surface

|                                     |                                     |                                  |                         |         |                             |                         |                             |                       |                   |
|-------------------------------------|-------------------------------------|----------------------------------|-------------------------|---------|-----------------------------|-------------------------|-----------------------------|-----------------------|-------------------|
| Ul or lot no.<br>L/I                | Section<br>36/35                    | Township<br>17S/17S              | Range<br>34E/34E        | Lot.Idn | Feet From The<br>2080/2080' | North/South Line<br>S/S | Feet From The<br>340'/1160' | East/West Line<br>W/E | County<br>LEA/LEA |
| <sup>12</sup> Dedicated Acres<br>80 | <sup>13</sup> Joint or Infill<br>No | <sup>14</sup> Consolidation Code | <sup>15</sup> Order No. |         |                             |                         |                             |                       |                   |

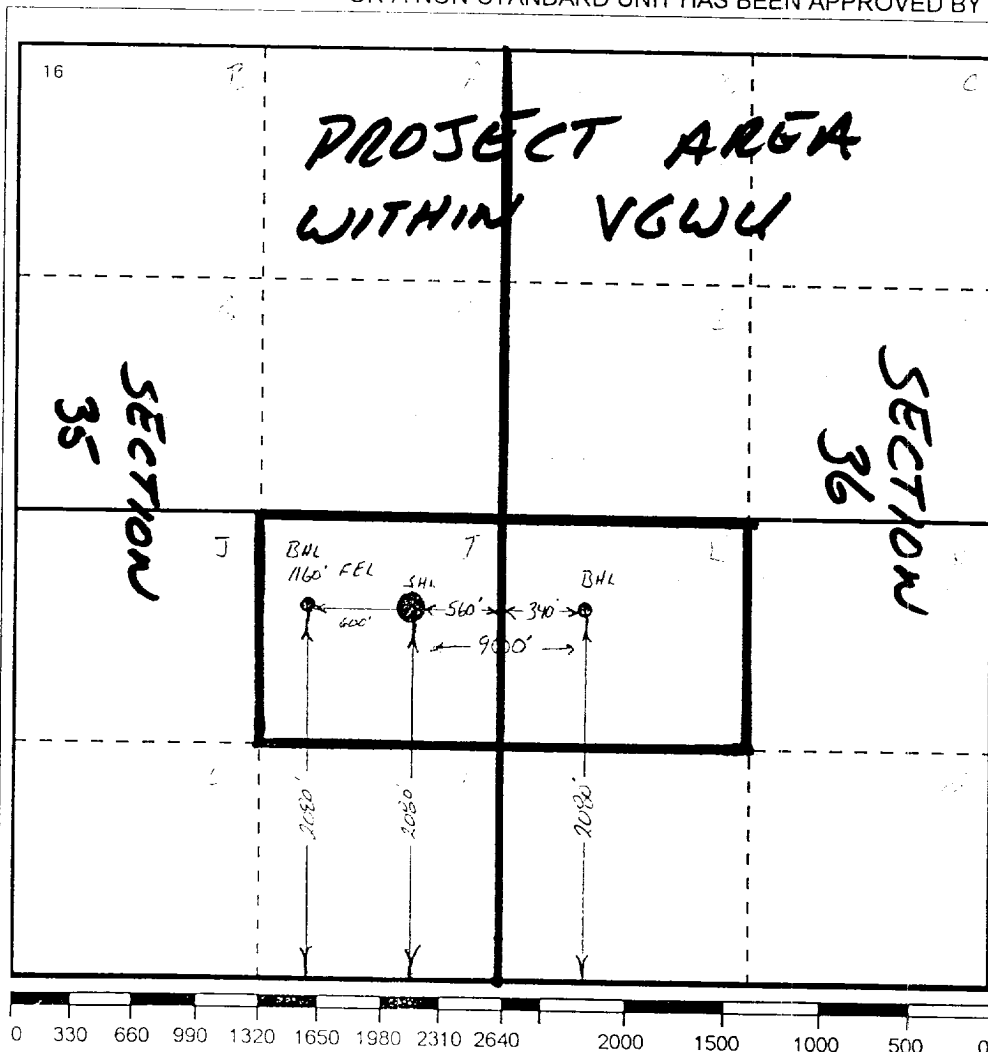NO ALLOWABLE WILL BE ASSIGNED TO THIS COMPLETION UNTIL ALL INTERESTS HAVE BEEN CONSOLIDATED  
OR A NON-STANDARD UNIT HAS BEEN APPROVED BY THE DIVISION

## 17 OPERATOR CERTIFICATION

I hereby certify that the information  
contained herein is true and complete to the  
best of my knowledge and belief

Signature

Printed Name

Darrell J. Carriger

Position

Prod. Engineer

Date

## 18 SURVEYOR CERTIFICATION


I hereby certify that the well location shown  
on this plat was plotted from field notes of  
actual surveys made by me or under my  
supervision, and that the same is true and  
correct to the best of my knowledge and  
belief.

Date Surveyed

Signature & Seal of  
Professional Surveyor

Certificate No.

# PROJECT AREA

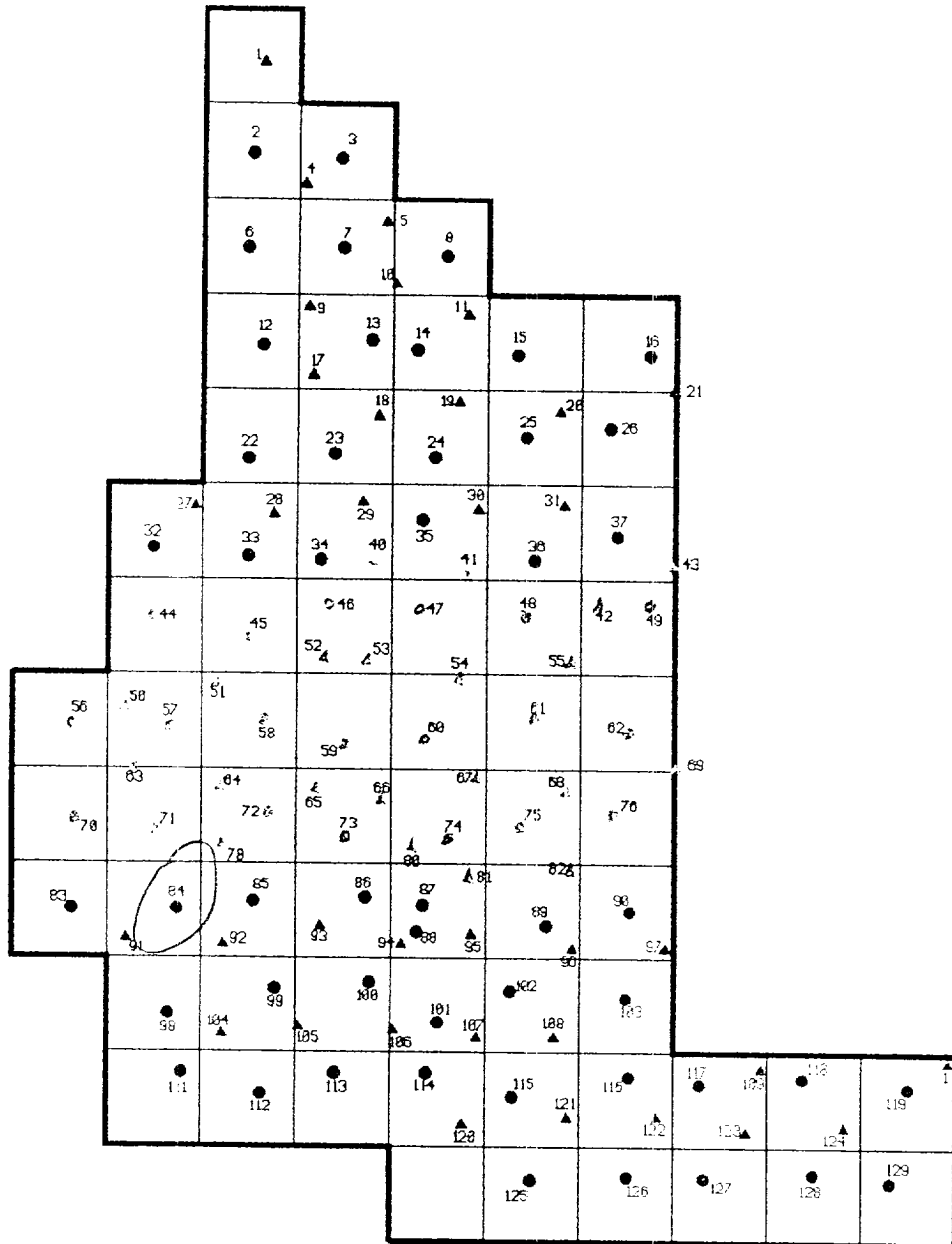

TEXACO EXPLORATION AND PRODUCTION

VACUUM GLORIETA WEST UNIT

Date: 4/27/98 BY: DARRELL J. CARRIGER



**Job Number:**

Company: TEXACO E&P

Lease/Well: VGWU #84

Location: LEA COUNTY

Rig Name: YALE E. KEY #119

RKB:

G.L. or M.S.L.:

State/Country: NEW MEXICO

Declination: 9.11795

Grid:

File name: D:\DATA\TEXACO-1\VGWU\VGWU\_84\VGWU84.SVY

Date/Time: 01-Apr-98 / 13:34

Curve Name: WESTERN (LOWER) LATERAL (REV.1) - 4/1/98

**DIAMONDBACK DIRECTIONAL  
A BWWC COMPANY**

**WINSERVE SURVEY CALCULATIONS**

*Minimum Curvature Method*

*Vertical Section Plane 270.00*

*Vertical Section Referenced to Wellhead*


*Rectangular Coordinates Referenced to Wellhead*

| Measured<br>Depth<br>FT                     | Incl<br>Angle<br>Deg | Drift<br>Direction<br>Deg | True<br>Vertical<br>Depth | N-S<br>FT | E-W<br>FT | Vertical<br>Section<br>FT | CLOSURE<br>Distance<br>FT | Direction<br>Deg | Dogleg<br>Severity<br>Deg/100 |
|---------------------------------------------|----------------------|---------------------------|---------------------------|-----------|-----------|---------------------------|---------------------------|------------------|-------------------------------|
| <b>KOP @ 5800' TVD, BEGIN 40.9°/100' BR</b> |                      |                           |                           |           |           |                           |                           |                  |                               |
| 5800.00                                     | .00                  | 270.00                    | 5800.00                   | .00       | .00       | .00                       | .00                       | .00              | .00                           |
| 5810.00                                     | 4.09                 | 270.00                    | 5809.99                   | .00       | -.36      | .36                       | .36                       | 270.00           | 40.89                         |
| 5820.00                                     | 8.18                 | 270.00                    | 5819.93                   | .00       | -1.42     | 1.42                      | 1.42                      | 270.00           | 40.89                         |
| 5830.00                                     | 12.27                | 270.00                    | 5829.77                   | .00       | -3.20     | 3.20                      | 3.20                      | 270.00           | 40.89                         |
| 5840.00                                     | 16.35                | 270.00                    | 5839.46                   | .00       | -5.67     | 5.67                      | 5.67                      | 270.00           | 40.89                         |
| 5850.00                                     | 20.44                | 270.00                    | 5848.95                   | .00       | -8.83     | 8.83                      | 8.83                      | 270.00           | 40.89                         |
| 5860.00                                     | 24.53                | 270.00                    | 5858.18                   | .00       | -12.65    | 12.65                     | 12.65                     | 270.00           | 40.89                         |
| 5870.00                                     | 28.62                | 270.00                    | 5867.13                   | .00       | -17.12    | 17.12                     | 17.12                     | 270.00           | 40.89                         |
| 5880.00                                     | 32.71                | 270.00                    | 5875.72                   | .00       | -22.22    | 22.22                     | 22.22                     | 270.00           | 40.89                         |

| Measured<br>Depth<br>FT                        | Incl<br>Angle<br>Deg | Drift<br>Direction<br>Deg | True<br>Vertical<br>Depth | N-S<br>FT | E-W<br>FT | Vertical<br>Section<br>FT | C L O S U R E  |                  | Dogleg<br>Severity<br>Deg/100 |
|------------------------------------------------|----------------------|---------------------------|---------------------------|-----------|-----------|---------------------------|----------------|------------------|-------------------------------|
|                                                |                      |                           |                           |           |           |                           | Distance<br>FT | Direction<br>Deg |                               |
| 5890.00                                        | 36.80                | 270.00                    | 5883.94                   | .00       | -27.92    | 27.92                     | 27.92          | 270.00           | 40.89                         |
| 5900.00                                        | 40.89                | 270.00                    | 5891.73                   | .00       | -34.19    | 34.19                     | 34.19          | 270.00           | 40.89                         |
| 5910.00                                        | 44.98                | 270.00                    | 5899.05                   | .00       | -41.00    | 41.00                     | 41.00          | 270.00           | 40.89                         |
| 5920.00                                        | 49.06                | 270.00                    | 5905.86                   | .00       | -48.32    | 48.32                     | 48.32          | 270.00           | 40.89                         |
| 5930.00                                        | 53.15                | 270.00                    | 5912.14                   | .00       | -56.10    | 56.10                     | 56.10          | 270.00           | 40.89                         |
| 5940.00                                        | 57.24                | 270.00                    | 5917.85                   | .00       | -64.31    | 64.31                     | 64.31          | 270.00           | 40.89                         |
| 5950.00                                        | 61.33                | 270.00                    | 5922.95                   | .00       | -72.90    | 72.90                     | 72.90          | 270.00           | 40.89                         |
| 5960.00                                        | 65.42                | 270.00                    | 5927.43                   | .00       | -81.84    | 81.84                     | 81.84          | 270.00           | 40.89                         |
| 5970.00                                        | 69.51                | 270.00                    | 5931.27                   | .00       | -91.07    | 91.07                     | 91.07          | 270.00           | 40.89                         |
| 5980.00                                        | 73.60                | 270.00                    | 5934.43                   | .00       | -100.56   | 100.56                    | 100.56         | 270.00           | 40.89                         |
| 5990.00                                        | 77.68                | 270.00                    | 5936.91                   | .00       | -110.24   | 110.24                    | 110.24         | 270.00           | 40.89                         |
| 6000.00                                        | 81.77                | 270.00                    | 5938.69                   | .00       | -120.08   | 120.08                    | 120.08         | 270.00           | 40.89                         |
| 6010.00                                        | 85.86                | 270.00                    | 5939.77                   | .00       | -130.02   | 130.02                    | 130.02         | 270.00           | 40.89                         |
| EOC @ 6014' MD, 5940' TVD, 87.54° INC, 134' VS |                      |                           |                           |           |           |                           |                |                  |                               |
| 6014.29                                        | 87.54                | 270.00                    | 5940.02                   | .00       | -134.30   | 134.30                    | 134.30         | 270.00           | 39.18                         |
| 6114.29                                        | 87.54                | 270.00                    | 5944.30                   | .00       | -234.21   | 234.21                    | 234.21         | 270.00           | .00                           |
| 6214.29                                        | 87.54                | 270.00                    | 5948.59                   | .00       | -334.12   | 334.12                    | 334.12         | 270.00           | .00                           |
| 6314.29                                        | 87.54                | 270.00                    | 5952.88                   | .00       | -434.03   | 434.03                    | 434.03         | 270.00           | .00                           |
| 6414.29                                        | 87.54                | 270.00                    | 5957.17                   | .00       | -533.94   | 533.94                    | 533.94         | 270.00           | .00                           |
| TD @ 6480' MD, 5960' TVD, 87.5° INC, 600' VS   |                      |                           |                           |           |           |                           |                |                  |                               |
| 6480.42                                        | 87.54                | 270.00                    | 5960.00                   | .00       | -600.00   | 600.00                    | 600.00         | 270.00           | .00                           |

Company: TEXACO E&P  
 Lease/Well: VGWU #84  
 Location: LEA COUNTY  
 Rig Name: YALE E. KEY #119  
 State/Country: NEW MEXICO  
 Declination: 9.11795

Grid:  
 File name: D:\DATA\TEXACO~1\VGWU\VGWU\_84\VGWU84.SVY  
 Date/Time: 01-Apr-98 / 13:34

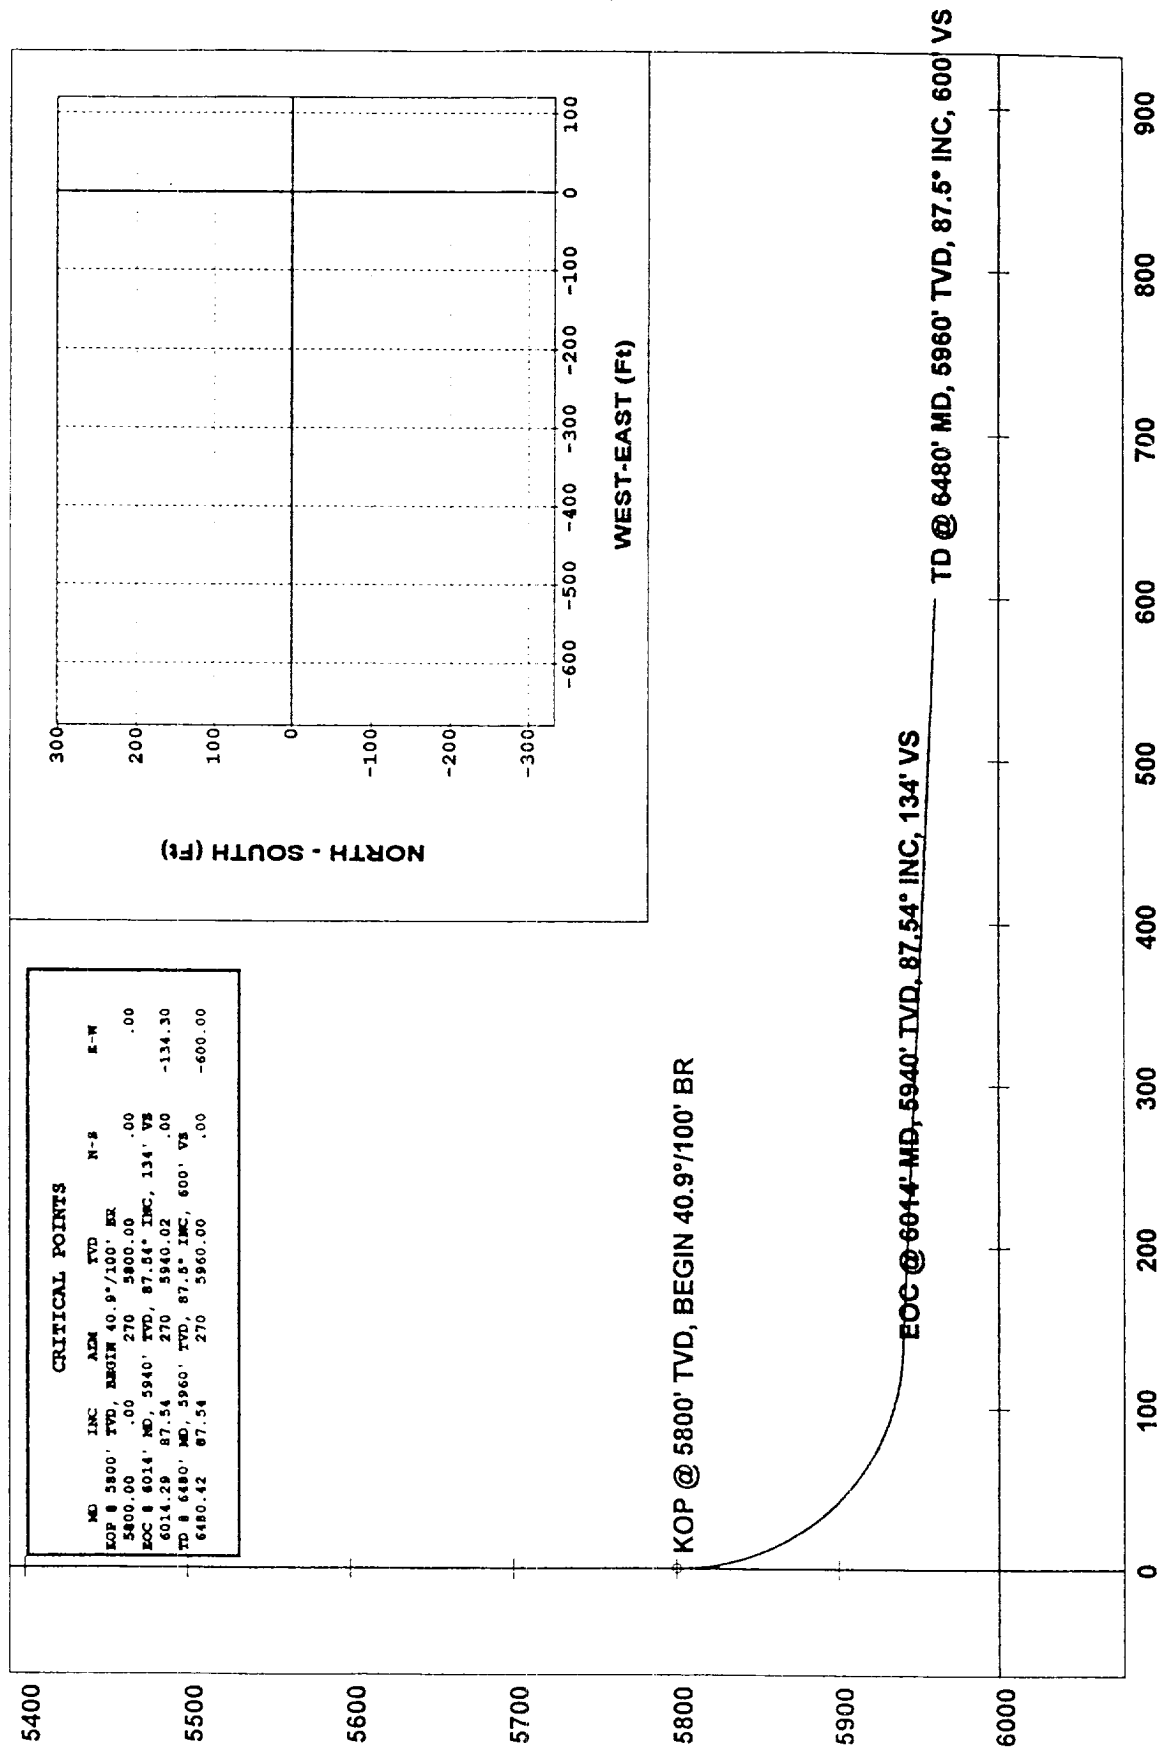



**Job Number:**

Company: TEXACO E&P

Lease/Well: VGWU #84

Location: LEA COUNTY

Rig Name: YALE E. KEY #119

RKB:

G.L. or M.S.L.:

State/Country: NEW MEXICO

Declination: 9.11795

Grid:

File name: D:\DATA\TEXACO-1\VGWU\VGWU\_84\VGWU84.SVY

Date/Time: 01-Apr-98 / 13:28

Curve Name: EASTERN (UPPER) LATERAL (REV.1) - 4/1/98

**DIAMONDBACK DIRECTIONAL  
A BWWC COMPANY**

**WINERVE SURVEY CALCULATIONS**

*Minimum Curvature Method*

*Vertical Section Plane 90.00*

*Vertical Section Referenced to Wellhead*

*Rectangular Coordinates Referenced to Wellhead*

| Measured<br>Depth<br>FT | Incl<br>Angle<br>Deg | Drift<br>Direction<br>Deg | True<br>Vertical<br>Depth | N-S<br>FT | E-W<br>FT | Vertical<br>Section<br>FT | CLOSURE        |                  | Dogleg<br>Severity<br>Deg/100 |
|-------------------------|----------------------|---------------------------|---------------------------|-----------|-----------|---------------------------|----------------|------------------|-------------------------------|
|                         |                      |                           |                           |           |           |                           | Distance<br>FT | Direction<br>Deg |                               |
| 5770.00                 | .00                  | 90.00                     | 5770.00                   | .00       | .00       | .00                       | .00            | .00              | .00                           |
| 5780.00                 | 3.37                 | 90.00                     | 5779.99                   | .00       | .29       | .29                       | .29            | 90.00            | 33.70                         |
| 5790.00                 | 6.74                 | 90.00                     | 5789.95                   | .00       | 1.17      | 1.17                      | 1.17           | 90.00            | 33.70                         |
| 5800.00                 | 10.11                | 90.00                     | 5799.84                   | .00       | 2.64      | 2.64                      | 2.64           | 90.00            | 33.70                         |
| 5810.00                 | 13.48                | 90.00                     | 5809.63                   | .00       | 4.68      | 4.68                      | 4.68           | 90.00            | 33.70                         |
| 5820.00                 | 16.85                | 90.00                     | 5819.28                   | .00       | 7.30      | 7.30                      | 7.30           | 90.00            | 33.70                         |
| 5830.00                 | 20.22                | 90.00                     | 5828.76                   | .00       | 10.48     | 10.48                     | 10.48          | 90.00            | 33.70                         |
| 5840.00                 | 23.59                | 90.00                     | 5838.04                   | .00       | 14.21     | 14.21                     | 14.21          | 90.00            | 33.70                         |
| 5850.00                 | 26.96                | 90.00                     | 5847.08                   | .00       | 18.48     | 18.48                     | 18.48          | 90.00            | 33.70                         |

**KOP @ 5770' TVD, BEGIN 33.7°/100 BR**

| Measured<br>Depth<br>FT                       | Incl<br>Angle<br>Deg | Drift<br>Direction<br>Deg | True<br>Vertical<br>Depth | N-S<br>FT | E-W<br>FT | Vertical<br>Section<br>FT | CLOSURE<br>Distance<br>FT | Direction<br>Deg | Dogleg<br>Severity<br>Deg/100 |
|-----------------------------------------------|----------------------|---------------------------|---------------------------|-----------|-----------|---------------------------|---------------------------|------------------|-------------------------------|
| 5860.00                                       | 30.33                | 90.00                     | 5855.86                   | .00       | 23.27     | 23.27                     | 23.27                     | 90.00            | 33.70                         |
| 5870.00                                       | 33.70                | 90.00                     | 5864.33                   | .00       | 28.57     | 28.57                     | 28.57                     | 90.00            | 33.70                         |
| 5880.00                                       | 37.07                | 90.00                     | 5872.49                   | .00       | 34.36     | 34.36                     | 34.36                     | 90.00            | 33.70                         |
| 5890.00                                       | 40.44                | 90.00                     | 5880.28                   | .00       | 40.62     | 40.62                     | 40.62                     | 90.00            | 33.70                         |
| 5900.00                                       | 43.81                | 90.00                     | 5887.70                   | .00       | 47.32     | 47.32                     | 47.32                     | 90.00            | 33.70                         |
| 5910.00                                       | 47.18                | 90.00                     | 5894.71                   | .00       | 54.45     | 54.45                     | 54.45                     | 90.00            | 33.70                         |
| 5920.00                                       | 50.55                | 90.00                     | 5901.29                   | .00       | 61.98     | 61.98                     | 61.98                     | 90.00            | 33.70                         |
| 5930.00                                       | 53.92                | 90.00                     | 5907.41                   | .00       | 69.89     | 69.89                     | 69.89                     | 90.00            | 33.70                         |
| 5940.00                                       | 57.29                | 90.00                     | 5913.06                   | .00       | 78.14     | 78.14                     | 78.14                     | 90.00            | 33.70                         |
| 5950.00                                       | 60.65                | 90.00                     | 5918.21                   | .00       | 86.70     | 86.70                     | 86.70                     | 90.00            | 33.70                         |
| 5960.00                                       | 64.02                | 90.00                     | 5922.86                   | .00       | 95.56     | 95.56                     | 95.56                     | 90.00            | 33.70                         |
| 5970.00                                       | 67.39                | 90.00                     | 5926.97                   | .00       | 104.67    | 104.67                    | 104.67                    | 90.00            | 33.70                         |
| 5980.00                                       | 70.76                | 90.00                     | 5930.54                   | .00       | 114.01    | 114.01                    | 114.01                    | 90.00            | 33.70                         |
| 5990.00                                       | 74.13                | 90.00                     | 5933.55                   | .00       | 123.55    | 123.55                    | 123.55                    | 90.00            | 33.70                         |
| 6000.00                                       | 77.50                | 90.00                     | 5936.00                   | .00       | 133.24    | 133.24                    | 133.24                    | 90.00            | 33.70                         |
| 6010.00                                       | 80.87                | 90.00                     | 5937.88                   | .00       | 143.06    | 143.06                    | 143.06                    | 90.00            | 33.70                         |
| 6020.00                                       | 84.24                | 90.00                     | 5939.17                   | .00       | 152.98    | 152.98                    | 152.98                    | 90.00            | 33.70                         |
| 6030.00                                       | 87.61                | 90.00                     | 5939.88                   | .00       | 162.95    | 162.95                    | 162.95                    | 90.00            | 33.70                         |
| 6040.00                                       | 90.98                | 90.00                     | 5940.01                   | .00       | 172.95    | 172.95                    | 172.95                    | 90.00            | 33.70                         |
| EOC @ 6041' MD, 5940' TVD, 91.2° INC, 174' VS |                      |                           |                           |           |           |                           |                           |                  |                               |
| 6041.03                                       | 91.18                | 90.00                     | 5939.99                   | .00       | 173.98    | 173.98                    | 173.98                    | 90.00            | 19.45                         |
| 6141.03                                       | 91.18                | 90.00                     | 5937.92                   | .00       | 273.95    | 273.95                    | 273.95                    | 90.00            | .00                           |
| 6241.03                                       | 91.18                | 90.00                     | 5935.86                   | .00       | 373.93    | 373.93                    | 373.93                    | 90.00            | .00                           |
| 6341.03                                       | 91.18                | 90.00                     | 5933.80                   | .00       | 473.91    | 473.91                    | 473.91                    | 90.00            | .00                           |
| 6441.03                                       | 91.18                | 90.00                     | 5931.73                   | .00       | 573.89    | 573.89                    | 573.89                    | 90.00            | .00                           |
| 6541.03                                       | 91.18                | 90.00                     | 5929.67                   | .00       | 673.87    | 673.87                    | 673.87                    | 90.00            | .00                           |
| 6641.03                                       | 91.18                | 90.00                     | 5927.60                   | .00       | 773.85    | 773.85                    | 773.85                    | 90.00            | .00                           |
| 6741.03                                       | 91.18                | 90.00                     | 5925.54                   | .00       | 873.83    | 873.83                    | 873.83                    | 90.00            | .00                           |
| TD @ 6767' MD, 5925' TVD, 91.2° INC, 900' VS  |                      |                           |                           |           |           |                           |                           |                  |                               |
| 6767.21                                       | 91.18                | 90.00                     | 5925.00                   | .00       | 900.00    | 900.00                    | 900.00                    | 90.00            | .00                           |

Company: TEXACO E&P  
 Lease/Well: VGWU #84  
 Location: LEA COUNTY  
 Rig Name: YALE E. KEY #119  
 State/Country: NEW MEXICO  
 Declination: 9.11795

Grid:  
 File name: D:\DATA\TEXACO~1\VGWU\VGWU\_84\VGWU84.SVY  
 Date/Time: 01-Apr-98 / 13:26

