

WELLBORE DIAGRAM

Basin Operating Company #1 Kimo Sabe State

1980 FSL & FEL
Section 16-T19S-R33E
Lea County, New Mexico
3648 GL

(Formerly King Resources #1 Kimo Sabe State, P & A 1973)

NOTES:


Bit Casing Depth Cemer

2nd Stage
DV tool at 2000'
Pumped 730 sx
BJ lite + 200 sx C

Delaware
Wet Sandstones
from 5969 to 7001

2 7/8 tubing to
7070' PACKER at
7030'
Pay Zone 7177 -
7194 Brushy
Canyon "I"

Note top 5 1/2
stub previously
reported at 7400'
but not found to
7755'. Top
somewhere below
7755'.

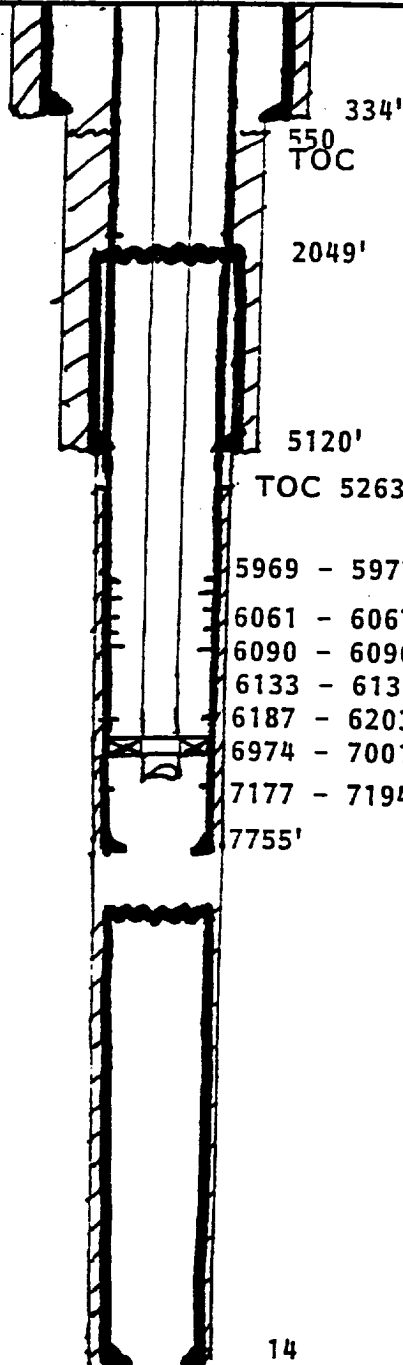

17 1/2

13 3/8

334

(surface
275sx c
Toc 550
2nd sta

2049'

9 5/8"

Stub a
2049'

5120'

TOC 5263

12 1/4"

9 5/8"

Csg Shoe
at 5120'

900 sx
TOC at
5263'

5969 - 5977

(wet)

6061 - 6067

(wet)

6090 - 6096

(wet)

6133 - 6139

(wet)

6187 - 6203

(wet)

6974 - 7001

(wet)

7177 - 7194

(20%
oil)

7755'

7 7/8

5 1/2

15.5 + 17#

7755

1st sta
Pumped
200 sx
lite, 30
sx C

14

7 7/8"

5 1/2

14446

1000 sx