

10. OF COPIES RECEIVED	
DISTRIBUTION	
AMTA FE	
FILE	
U.S.G.S.	
LAND OFFICE	
OPERATOR	

NEW MEXICO OIL CONSERVATION COMMISSION

Form C-103
Supersedes Old
C-102 and C-103
Effective 1-1-65

5a. Indicate Type of Lease State ☒ Fee ☐
5. State Oil & Gas Lease No. B-1520
7. Unit Agreement Name
8. Farm or Lease Name Bridges State
9. Well No. 168
10. Field and Pool, or Wildcat Vac. Grayburg SA
12. County Lea

SUNDRY NOTICES AND REPORTS ON WELLS

DO NOT USE THIS FORM FOR PROPOSALS TO DRILL OR TO RE-OPEN OR PLUG BACK TO A DIFFERENT RESERVOIR.
USE "APPLICATION FOR PERMIT -" (FORM C-101) FOR SUCH PROPOSALS.

1. OIL WELL ☒ GAS WELL ☐ OTHER ☐
2. Name of Operator Mobil Oil Corporation
3. Address of Operator Nine Greenway Plaza, Suite 2700, Houston, Texas 77046
4. Location of Well UNIT LETTER F 1980 FEET FROM THE North LINE AND 1780 FEET FROM THE West LINE, SECTION 26 TOWNSHIP 17-S RANGE 34-E NMPM.

15. Elevation (Show whether DF, RT, GR, etc.)
4030

16. Check Appropriate Box To Indicate Nature of Notice, Report or Other Data
NOTICE OF INTENTION TO: SUBSEQUENT REPORT OF:

PERFORM REMEDIAL WORK ☐	PLUG AND ABANDON ☒	REMEDIAL WORK ☐	ALTERING CASING ☐
TEMPORARILY ABANDON ☐	CHANGE PLANS ☐	COMMENCE DRILLING OPNS. ☐	PLUG AND ABANDONMENT ☐
PULL OR ALTER CASING ☐	OTHER ☐	CASING TEST AND CEMENT JOBS ☐	OTHER ☐

17. Describe Proposed or Completed Operations (Clearly state all pertinent details, and give pertinent dates, including estimated date of starting any proposed work) SEE RULE 1103.


- Open surface valve and bleed off any pressure or waterflow.
- GIH w/5½" cmt retainer and set at 4450'.
- Squeeze San Andres perms (4507'-4587') through retainer w/75 sx Class "C" neat.
- Spot a 40' cmt plug on the retainer w/6 sx Class "C" neat.
- Load hole w/9.5 lb/gal mud laden fluid, using 25 lbs gel per 100 bbls to obtain minimum density.
- Spot a 100' cmt plug across the salt section base (2700'-2800') using 10sx Class "C" neat.
- Perforate 600'-602' (4 JSPP) using a 4" csg gun. Bleed off all resulting pressure and waterflow. Set 5½" cmt retainer at 550'. Circulate approx. 150 sx Class "C" neat through perms and up between 5½" and 8-5/8" csg strings.
- Spot a 40' plug on the retainer using 4 sx Class "C" neat.
- Spot a 20' plug at the surface using 2 sx Class "C" neat.
- Erect P&A monument; clear location.

NOTES: Procedure verbally approved by Les Clements of the NMOCD. Notify NMOCD (505) 393-6161 24 hrs prior to P&A.

18. I hereby certify that the information above is true and complete to the best of my knowledge and belief.

SIGNED <u>Robbie Jay</u>	TITLE <u>Authorized Agent</u>	DATE <u>4/18/79</u>
Orig Signed by Les Clements	TITLE _____	DATE <u>APR 25 1979</u>
APPROVED BY _____	TITLE _____	DATE _____
CONDITIONS OF APPROVAL, IF ANY:		

Field: <u>S Carbide Morrow</u>	Date: <u>12/6/76</u>	T/A Date:
License: <u>State "SS"</u>	No. <u>#1</u>	County & State: <u>Eddy - New Mexico</u>
Location: <u>C 540-T 255-R 2E</u>	Completion Date: <u>7/74</u>	Env: <u>KB Env:</u>

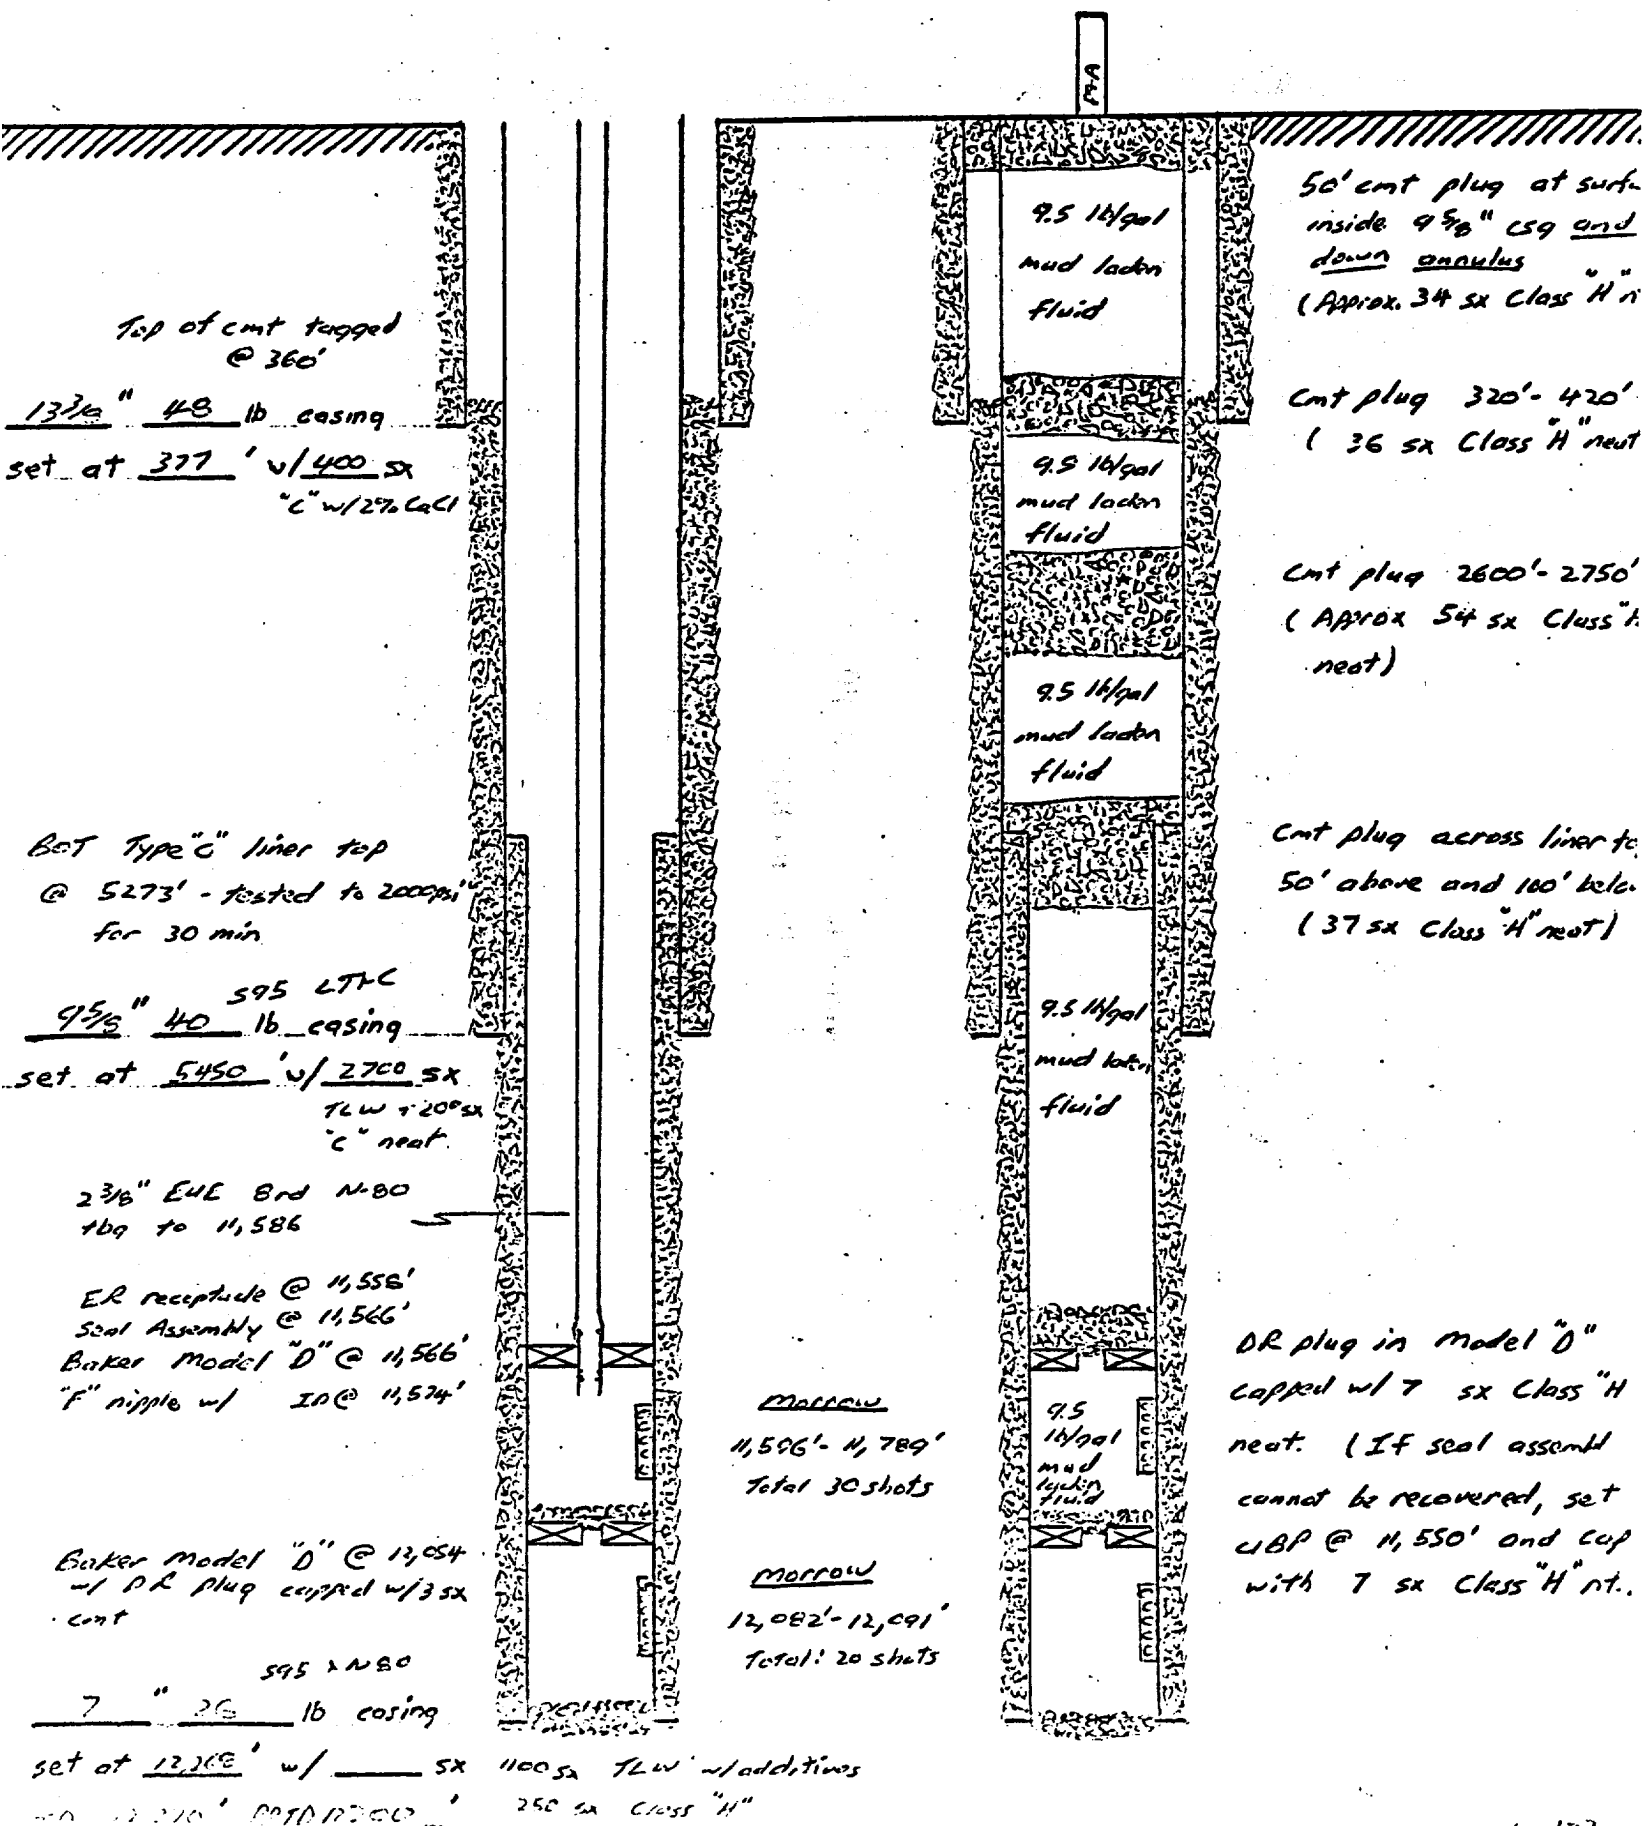

STATE SS #

MORROW

CAPITOL S. MORROW

EDDY COUNTY N.M.

INITIAL CSE 7/31/74

7 MMLCPD

ON LINE CSE 10/15/79

E 253 MMLCPD

MCFPD

1,000.0

100.0

KE 5 YEARS BY MONTHS
X 3 LOG CYCLES
MADE IN U.S.A.
KEUFFEL & ESSER CO.

