

CASING STRING DESCRIPTION

ITEM	SIZE	MANUF.	TYPE	LENGTH	TOP	BOTTOM
CASING (Show smallest ID)	15 KB	542				
LINER (Show smallest ID)					0	4580
PACKER (Show bore dia.)						
PERFORATIONS/OPEN HOLES						
RTTB Plug set					4450	4545
					4388	

TUBING STRING DESCRIPTION

ITEM	SIZE	WEIGHT	GRADE	CONN.	LENGTH	TOP	BOTTOM
TUBING							
TUBING							
TUBING ANCHOR/PACKER/SEALS	TA						
SEATING NIPPLE							
PERFORATED NIPPLE							
MUD ANCHOR							

ROD STRING DESCRIPTION

ITEM	SIZE	MANUF.	TYPE	NO. JTS.	LENGTH	TOP	BOTTOM
POLISHED ROD							
PUP JOINTS							
RODS	TA						
RODS							
RODS							
RODS							
SINKER BARS							
PUMP							
GAS ANCHOR							

PUMPING UNIT DESCRIPTION

MANUF.	MODEL	TYPE	SPM	STROKE	POC?	PUMP TIME

PRODUCTION INFORMATION

FL	BOPD	BWPD	MCFD	TEMP.	PRES.	PPMCO2	PPMH2S

REMARKS

10-8-98 - Road Rig to location - Rig up - jinn Pump loose - start out hole 5010N

10-8-98 - finish laying down rods - 1 1/2" x 26' Polished Rod - 1 3/4" x 16' Liner 2.6-8 7/8 sub
5 1/2" x 26' Rod 3/4" Rod 6-1 1/2" x 16' Rod - 2 1/2" x 1 1/2" x 24' Pump - 1 1/4" x 10' gas anchor

Put BOP - Pull 137' 8 1/2" - 5 1/2" Anchor 8 1/2" - 1-Blat joint - 2 1/2" R. 7/8 sub

SN-2 7/8 - 1 Refurb - 2 7/8 - 1-3 1/2" opening - Gully out

Run Plug - 4 1/4" 2 1/2" - 8' up - set at 4388, 402

Displace hole w/ Packer fluid - test on Chart - 5010N
OK - 510N

10-12-98 - Lay down tubing - 1 1/2" 5' 6" on rack,


Pull BOP - Plunger

Rig down - Clean location

1

TEACO
10-9-98
W J V #126
Rowland Trisking
Lang Cattleman #763
Plus @ 4388'



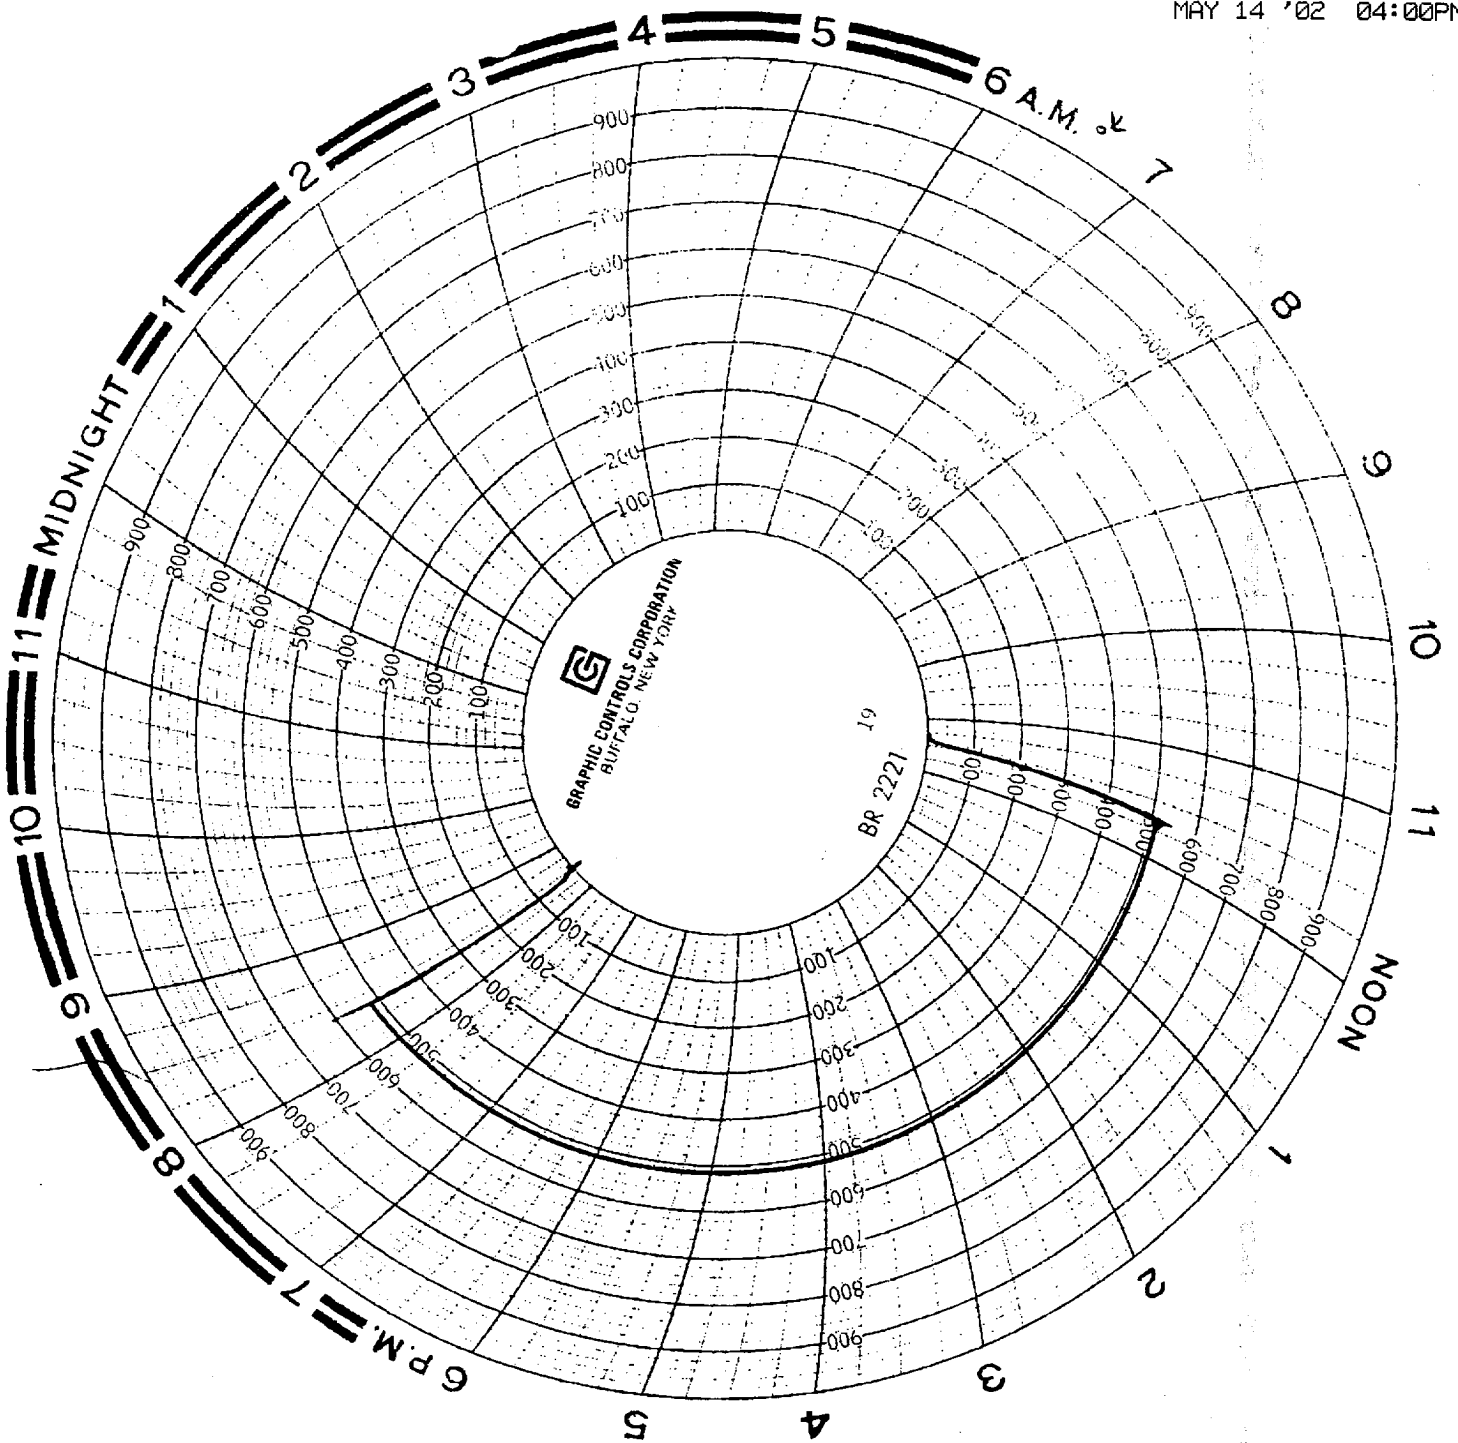

1