

UNITED STATES  
DEPARTMENT OF THE INTERIOR  
GEOLOGICAL SURVEYSUBMIT IN TRIP  
(Other instruction,  
reverse side)TE  
re-Form approved.  
Budget Bureau No. 42-R1424.

5. LEASE DESIGNATION AND SERIAL NO.

N.M. 073240

6. IF INDIAN, ALLOTTEE OR TRIBE NAME

\*\*\*\*\*

7. UNIT AGREEMENT NAME

\*\*\*\*\*

8. FARM OR LEASE NAME

Wallen Tonto

9. WELL NO.

# 7

10. FIELD AND POOL, OR WILDCAT

South Tonto, Yates, Seve

11. SEC., T., R., M., OR BLK. AND  
SURVEY OR AREA

Sec 30, T 19 S, R 33 E

12. COUNTY OR PARISH

Lea

13. STATE

New Mexico

## SUNDRY NOTICES AND REPORTS ON WELLS

(Do not use this form for proposals to drill or to deepen or plug back to a different reservoir.  
Use "APPLICATION FOR PERMIT—" for such proposals.)1. OIL WELL ☒ GAS WELL ☐ OTHER ☐

2. NAME OF OPERATOR

Walter W. Krug D.B.A. Wallen Production Company

3. ADDRESS OF OPERATOR

Box 1960 Midland, Texas 79702

4. LOCATION OF WELL (Report location clearly and in accordance with any State requirements.\*  
See also space 17 below.)  
At surface

990 F E L &amp; 1650 F S L

14. PERMIT NO.

\*\*\*\*\*

15. ELEVATIONS (Show whether DF, RT, GR, etc.)

GR 3589

## 16. Check Appropriate Box To Indicate Nature of Notice, Report, or Other Data

## NOTICE OF INTENTION TO:

TEST WATER SHUT-OFF

☐  
☐  
☐  
☐  
☐

PULL OR ALTER CASING

☐  
☐  
☒  
☐  
☐

FRACTURE TREAT

MULTIPLE COMPLETE

SHOOT OR ACIDIZE

ABANDON\*

REPAIR WELL

CHANGE PLANS

(Other)

## SUBSEQUENT REPORT OF:

WATER SHUT-OFF

☐  
☐  
☐  
☐  
☐

FRACTURE TREATMENT

SHOOTING OR ACIDIZING

(Other)

REPAIRING WELL

ALTERING CASING

ABANDONMENT\*

☐  
☐  
☐  
☐  
☐(NOTE: Report results of multiple completion on Well  
Completion or Recompletion Report and Log form.)

17. DESCRIBE PROPOSED OR COMPLETED OPERATIONS (Clearly state all pertinent details, and give pertinent dates, including estimated date of starting any proposed work. If well is directionally drilled, give subsurface locations and measured and true vertical depths for all markers and zones pertinent to this work.)\*

On 7/15/78 we will run tubing (2 3/8) to total depth of 3119 and will place 100 sx plug of class H neat cement; leave it overnight to harden. The following morning we'll fill from top of cement plug to 1400' with gel and then another 100 sx plug of class H neat cement. Then fill the rest of hole with gel and a 10 sx plug at top of ground with 5'-4 1/2" csg marker with all necessary information.

RECEIVED

JUL 27 1978

U. S. GEOLOGICAL SURVEY  
HOBBS, NEW MEXICO

18. I hereby certify that the foregoing is true and correct

SIGNED

*Walter W. Krug*

TITLE Engineer


DATE 7/10/78

(This space for Federal or State office use)

APPROVED BY

CONDITIONS OF APPROVAL, IF ANY:

TITLE

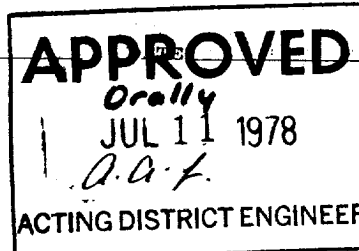

\*See Instructions on Reverse Side

APPROVED

RECEIVED

AUG 1 1978

U.S. COMMISSION ON GOV. AFF.  
WASH. D. C.