

UNITED STATES
DEPARTMENT OF THE INTERIOR
GEOLOGICAL SURVEYCOPY TO O. C. G.
SUBMIT IN TRIPLICATE
(Other instructions on
reverse side)Form approved.
Budget Bureau No. 42-R1424.

5. LEASE DESIGNATION AND SERIAL NO.

NM-14794

6. IF INDIAN, ALLOTTEE OR TRIBE NAME

7. UNIT AGREEMENT NAME

8. FARM OR LEASE NAME

Maduro Unit Federal

9. WELL NO.

1

10. FIELD AND POOL, OR WILDCAT

Wildcat

11. SEC., T., R., M., OR BLK. AND
SURVEY OR AREA

Sec. 29, T-19-S, R-33-E

14. PERMIT NO.

15. ELEVATIONS (Show whether DF, RT, GR, etc.)

3583.6' GR.

12. COUNTY OR PARISH

Lea

13. STATE

New Mexico

16. Check Appropriate Box To Indicate Nature of Notice, Report, or Other Data

NOTICE OF INTENTION TO:

TEST WATER SHUT-OFF

☐
☐
☐
☐
☐

PULL OR ALTER CASING

☐
☐
☐
☐
☐

FRACTURE TREAT

MULTIPLE COMPLETE

SHOOT OR ACIDIZE

ABANDON*

REPAIR WELL

CHANGE PLANS

(Other)

SUBSEQUENT REPORT OF:

WATER SHUT-OFF

☐
☐
☐
☐
☐

REPAIRING WELL

☐
☐
☐
☐
☐

FRACTURE TREATMENT

ALTERING CASING

SHOOTING OR ACIDIZING

ABANDONMENT*

(Other) Set intermediate casing

X

(NOTE: Report results of multiple completion on Well
Completion or Recompletion Report and Log form.)

17. DESCRIBE PROPOSED OR COMPLETED OPERATIONS (Clearly state all pertinent details, and give pertinent dates, including estimated date of starting any proposed work. If well is directionally drilled, give subsurface locations and measured and true vertical depths for all markers and zones pertinent to this work.)*

- 5-28-79 - W.O.C. 18 hours. Nipped up 3000 psi B.O.P., tested 13-3/8" OD Casing and B.O.P. to 600 psi, held OK. Ran 12-1/4" bit, drilled from 1,275' to 3,925', lost circulation, drilled to 4,069'. Cemented lost circulation zone with two 400 sx cement plugs. Ran 12-1/4" bit, drilled from 4,069' to 5,190'
- 6- 8-79 - Ran 118 jts. and 1 piece (5,142.5') of 9-5/8" OD 40# N-80 K-55 8rd LT&C new casing set at 5,162', DV Tool at 3,457'. First stage cemented with 450 sx Class "C" Cement, job completed at 12:00 Noon 6-8-79. Second stage cemented with 2650 sx cement, cement circulated to surface. Job completed at 7:30 P.M. 6-8-79. W.O.C.

RECEIVED

AUG 24 1979

U. S. GEOLOGICAL SURVEY
HOBBS, NEW MEXICO

18. I hereby certify that the foregoing is true and correct


SIGNED J.L. WhiteTITLE Drilling SuperintendentDATE Aug. 22, 1979

(This space for Federal or State office use)

APPROVED BY

TITLE

CONDITIONS OF APPROVAL, IF ANY:

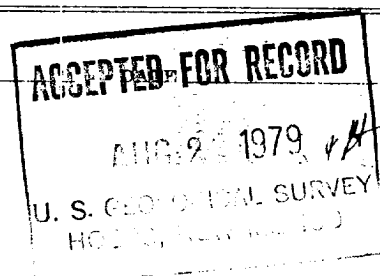

*See Instructions on Reverse Side

General: This form is designed for submitting proposals to perform certain well operations, and reports of such operations when completed, as indicated, on Federal and Indian lands pursuant to applicable Federal law and regulations, and, if approved or accepted by any State, on all lands in such State, pursuant to applicable State law and regulations. Any necessary special instructions concerning the use of this form and the number of copies to be submitted, particularly with regard to local, area, or regional procedures and practices, either are shown below or will be issued by, or may be obtained from, the local Federal and/or State office.

Item 4: If there are no applicable State requirements, locations on Federal or Indian land should be described in accordance with Federal requirements. Consult local State or Federal office for specific instructions.

Item 17: Proposals to abandon a well and subsequent reports of abandonment should include such special information as is required by local Federal and/or State offices. In addition, such proposals and reports should include reasons for the abandonment; data on any former or present productive zones, or other zones with present significant fluid contents not sealed off by cement or otherwise; depths (top and bottom) and method of placement of cement plugs; mud or other material placed below, between and above plugs; amount, size, method of parting of any casing, liner or tubing pulled and the depth to top of any left in the hole; method of closing top of well; and date well site conditioned for final inspection looking to approval of the abandonment.

at 7:30 P.M. 8-8-78. W.O.C. cemented with 2500 cc cement, cement introduced to surface. 450 cc Class "G" Cement, job completed at 12:00 Noon 8-8-78. New casing set at 2,152'. DV Tool at 2,427'. First stage of cementing was 1000 cc. and 1 pipe (2,142.5') of 2-3/8" OD 401-N-30 N-118 pipe. Two 400 cc cement plugs. Ran 12-1/4" bit, drilled from 4,000' to 4,080'. Cemented lost circulation, drilled to 4,080'. Cemented lost OK. Ran 12-1/4" bit, drilled from 8,000' to 8,000' pat, held OK. Ran 12-1/4" bit, drilled from 8,000' to 8,000' pat. Drilled up 3000 pat R.O.C., tested 12-3/4" 2-8-78 -

On 11/11/2001, the following information was received from the FBI:

AUG 28 1964

O.C.D. HOBBS, OFFICE