

UNITED STATES
DEPARTMENT OF THE INTERIOR
GEOLOGICAL SURVEY

SUNDRY NOTICES AND REPORTS ON WELLS

(Do not use this form for proposals to drill or to deepen or plug back to a different reservoir. Use Form 9-331-C for such proposals.)

1. oil ☒ gas ☐
well well other

2. NAME OF OPERATOR
Amoco Production Company

3. ADDRESS OF OPERATOR
P. O. Box 68, Hobbs, NM 88240

4. LOCATION OF WELL (REPORT LOCATION CLEARLY. See space 17 below.)
AT SURFACE: 1980' FNL x 1980' FWL, Sec. 7
AT TOP PROD. INTERVAL: (Unit F, SE/4, NW/4)
AT TOTAL DEPTH:

16. CHECK APPROPRIATE BOX TO INDICATE NATURE OF NOTICE, REPORT, OR OTHER DATA

REQUEST FOR APPROVAL TO:

TEST WATER SHUT-OFF ☐
FRACTURE TREAT ☐
SHOOT OR ACIDIZE ☐
REPAIR WELL ☐
PULL OR ALTER CASING ☐
MULTIPLE COMPLETE ☐
CHANGE ZONES ☐
ABANDON* ☐

(other) Set Casing

SUBSEQUENT REPORT OF:

☐
☐
☐
☐
☐
☐
☐
☐

5. LEASE

NM-40450

6. IF INDIAN, ALLOTTEE OR TRIBE NAME

7. UNIT AGREEMENT NAME

8. FARM OR LEASE NAME

Federal CS

9. WELL NO.

1

10. FIELD OR WILDCAT NAME

Wildcat Bone Springs

11. SEC., T., R., M., OR BLK. AND SURVEY OR AREA

7-18-32

12. COUNTY OR PARISH

Lea

13. STATE

NM

14. API NO.

15. ELEVATIONS (SHOW DF, KDB, AND WD)

3786.3 GL

(NOTE: Report results of multiple completion or zone change on Form 9-330.)

17. DESCRIBE PROPOSED OR COMPLETED OPERATIONS (Clearly state all pertinent details, and give pertinent dates, including estimated date of starting any proposed work. If well is directionally drilled, give subsurface locations and measured and true vertical depths for all markers and zones pertinent to this work.)*

(17# K-55, 17# N-80)

Drilled to TD of 8550'. Ran 5-1/2" casing set at 8550'. Cemented with 625 sacks class H cement with .3% Halad 4 and 1600 sacks class C cement with .3% Halad 4. WOC 18 hours. Drilled out cement. Tested to 1000 PSI. Tested O.K. Perforated interval 8256'-94' with 4 JSPF. Ran 2-7/8" tubing landed at 8207' and packer set at 8107'. Swab tested 4 hours. Recovered 32 barrels of load water. Acidized well with 3500 gallons 15% NE-HCL and 118000 SCF N2. Swab tested 24 hours. Recovered 4 barrels of oil and 24 barrels of load water.

0+6-USGS, R 1-Hou 1-W. Stafford, Hou 1-DMF 1-Belco 1-Galaxy

Subsurface Safety Valve: Manu. and Type

18. I hereby certify that the foregoing is true and correct

SIGNED

M. L. Freeman

TITLE

Ast. Adm. Analyst

DATE



4-29-82

(This space for Federal or State office use)

APPROVED BY

TITLE

CONDITIONS OF APPROVAL, IF ANY:

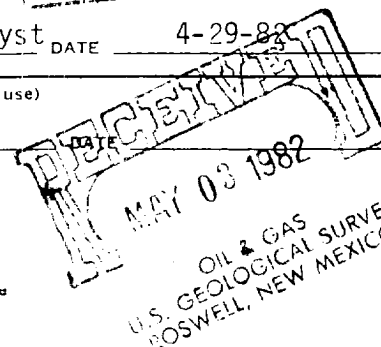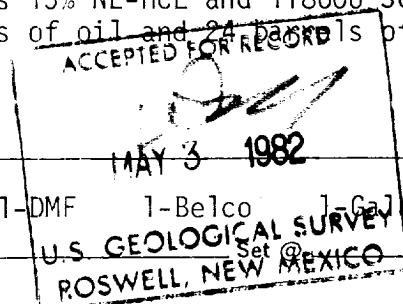

RECEIVED

MAY 4 1982

G.C.D.
HOBBS OFFICE