

UNITED STATES
DEPARTMENT OF THE INTERIOR
GEOLOGICAL SURVEY

SUNDRY NOTICES AND REPORTS ON WELLS

(Do not use this form for proposals to drill or to deepen or plug back to a different reservoir. Use Form 9-331-C for such proposals.)

| | |
|--|--|
| 1. oil well <input type="checkbox"/> gas well <input checked="" type="checkbox"/> other | 5. LEASE NM-40452 |
| 2. NAME OF OPERATOR Amoco Production Company | 6. IF INDIAN, ALLOTTEE OR TRIBE NAME |
| 3. ADDRESS OF OPERATOR P. O. Box 68, Hobbs, NM 88240 | 7. UNIT AGREEMENT NAME |
| 4. LOCATION OF WELL (REPORT LOCATION CLEARLY. See space 17 below.) AT SURFACE: 660' FNLx 1980' FEL, Sec. 14 AT TOP PROD. INTERVAL: (Unit B, NW/4, NE/4) AT TOTAL DEPTH: | 8. FARM OR LEASE NAME Federal BY |
| 16. CHECK APPROPRIATE BOX TO INDICATE NATURE OF NOTICE, REPORT, OR OTHER DATA | 9. WELL NO. 1 |
| | 10. FIELD OR WILDCAT NAME Wildcat Morrow |
| | 11. SEC., T., R., M., OR BLK. AND SURVEY OR AREA 14-18-32 |
| | 12. COUNTY OR PARISH Lea |
| | 13. STATE NM |
| | 14. API NO. |
| | 15. ELEVATIONS (SHOW DF, KDB, AND WD) 3825' GL |

| REQUEST FOR APPROVAL TO: | SUBSEQUENT REPORT OF: |
|---|--------------------------|
| TEST WATER SHUT-OFF <input type="checkbox"/> | <input type="checkbox"/> |
| FRACTURE TREAT <input type="checkbox"/> | <input type="checkbox"/> |
| SHOOT OR ACIDIZE <input type="checkbox"/> | <input type="checkbox"/> |
| REPAIR WELL <input type="checkbox"/> | <input type="checkbox"/> |
| PULL OR ALTER CASING <input type="checkbox"/> | <input type="checkbox"/> |
| MULTIPLE COMPLETE <input type="checkbox"/> | <input type="checkbox"/> |
| CHANGE ZONES <input type="checkbox"/> | <input type="checkbox"/> |
| ABANDON* <input type="checkbox"/> | <input type="checkbox"/> |
| (other) Set Casing | |

(NOTE: Report results of multiple completion or zone change on Form 9-330.)

17. DESCRIBE PROPOSED OR COMPLETED OPERATIONS (Clearly state all pertinent details, and give pertinent dates, including estimated date of starting any proposed work. If well is directionally drilled, give subsurface locations and measured and true vertical depths for all markers and zones pertinent to this work.)*

On 4-11-82 McVay #10 spudded a 17-1/2" hole. Drilled to TD of 674'. Ran 13-3/8" H-40 48 lb/ft. casing set at 674'. Cemented with 700 sacks class C with .3% Halad 4. Circulated to surface. WOC 18 hours. Tested casing to 600 PSI. Tested o.k. Reduced bit to 2-1/4" and resumed drilling. Drilled to TD of 4900'. Ran 9-5/8" N-80 40 lb./ft casing set at 4900'. Cemented with 2750 sacks lite with .3% Halad4 and 200 sacks class C with .3% Halad 4. Circulated 720 sacks. Currently drilling casing for record

0+6-USGS, R 1-Hou 1-W, Stafford, Hou 1-DMF - MAY 5 1982


Subsurface Safety Valve: Manu. and Type

18. I hereby certify that the foregoing is true and correct

SIGNED Mark Freeman TITLE Asst. Adm. Analyst DATE MAY 5 1982

(This space for Federal or State office use)

APPROVED BY _____ TITLE _____ DATE _____
CONDITIONS OF APPROVAL, IF ANY:

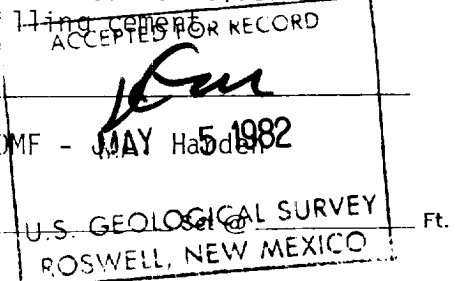

OIL & GAS
U.S. GEOLOGICAL SURVEY
ROSSELL, NEW MEXICO