

UNITED STATES  
DEPARTMENT OF THE INTERIOR  
BUREAU OF LAND MANAGEMENT

N.M. Oil Cons. Division  
P.O. Box 1980  
Hobbs, NM 88241

FORM APPROVED  
Budget Bureau No. 1004-0135  
Expires: March 31, 1993

SUNDRY NOTICES AND REPORTS ON WELLS

Do not use this form for proposals to drill or to deepen or reentry to a different reservoir.  
Use "APPLICATION FOR PERMIT—" for such proposals

SUBMIT IN TRIPLICATE

1. Type of Well

☒ Oil Well ☐ Gas Well ☐ Other

2. Name of Operator

Manzano Oil Corporation

3. Address and Telephone No.

P.O. Box 2107, Roswell, NM 88202-22107 (505) 623-1996

4. Location of Well (Footage, Sec., T., R., M., or Survey Description)

660' FNL & 660' FEL  
Section 18, T18S, R32E

5. Lease Designation and Serial No.

NM-67986

6. If Indian, Allottee or Tribe Name

7. If Unit or CA, Agreement Designation

8. Well Name and No.

Xion Federal

9. API Well No.

30-025-27846

10. Field and Pool, or Exploratory Area

N. Young Bone Spring

11. County or Parish, State

Lea County, NM

12. CHECK APPROPRIATE BOX(s) TO INDICATE NATURE OF NOTICE, REPORT, OR OTHER DATA

TYPE OF SUBMISSION

- ☒ Notice of Intent  
☐ Subsequent Report  
☐ Final Abandonment Notice

TYPE OF ACTION

- ☒ Abandonment  
☐ Recompletion  
☐ Plugging Back  
☐ Casing Repair  
☐ Altering Casing  
☐ Other \_\_\_\_\_
- ☐ Change of Plans  
☐ New Construction  
☐ Non-Routine Fracturing  
☐ Water Shut-Off  
☐ Conversion to Injection  
☐ Dispose Water

(Note: Report results of multiple completion on Well Completion or Recompletion Report and Log form.)

13. Describe Proposed or Completed Operations (Clearly state all pertinent details, and give pertinent dates, including estimated date of starting any proposed work. If well is directionally drilled, give subsurface locations and measured and true vertical depths for all markers and zones pertinent to this work.)\*

1. 100' cement plug from 7800 - 7900'.
2. 100' cement plug from 5100 - 5200'.
3. 100' cement plug from 4450 - 4550'.
4. 100' cement plug from 2375 - 2475'.
5. 100' cement plug from 750 - 850'.
6. 20 sks @ surface.
7. Install dry hole marker.

per the 4 1/2" + 5 1/2" @ 850' + squeeze cement  
per the 4 1/2" + 5 1/2" @ 100' + squeeze cement

RECEIVED  
AUG 12 12 52 PM '96  
BUREAU OF LAND MGMT  
HOBBS, NM

SEE ATTACHED FOR  
CONDITIONS OF APPROVAL

14. I hereby certify that the foregoing is true and correct

Signed Alison Hernandez

Title Engineering Technician

Date 8/12/96

(This space for Federal or State office use)

Approved by LOPEZ  
Conditions of approval, if any:

Title \_\_\_\_\_

Date 8/22/96

MANZANO OIL CORPORATION'S

XION FEDERAL #1  
SECTION 18, T18S, R32E  
LEA COUNTY, NEW MEXICO

FORMERLY

AMOCO PRODUCTION CO.  
#1 FEDERAL CQ  
SEC. 18 - T18S - R32E  
UNIT A

RECEIVED

AUG 13 12 52 PM '96

BUREAU OF LAND MGMT  
HOBBS, NM

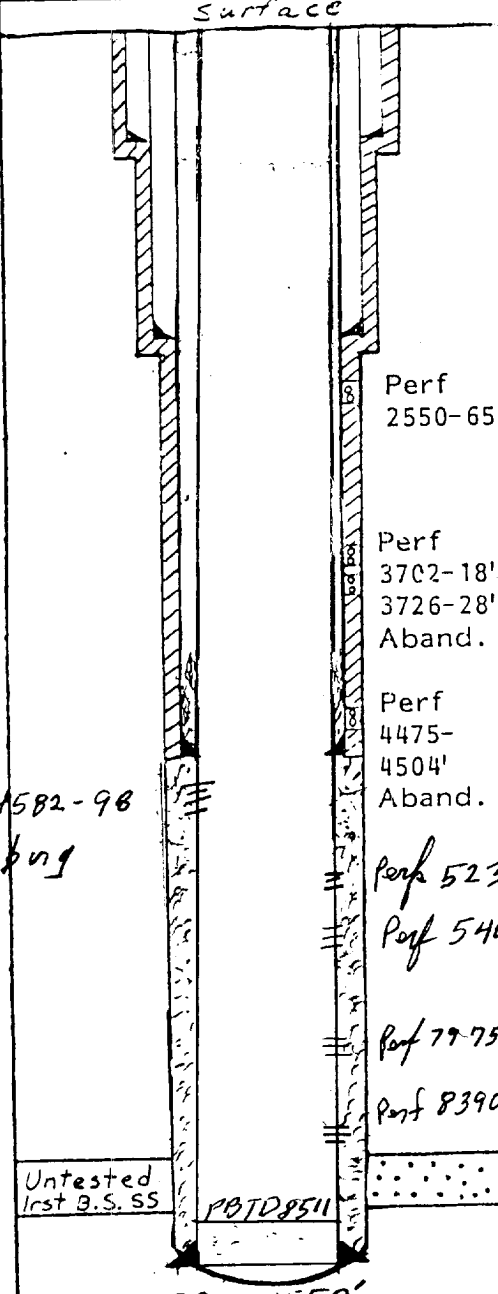
Plugging

Bit

Casing

Depth

Cement

Plugging	Surface	Bit	Casing	Depth	Cement
		14-3/4"	11-3/4"	700'	400 sx Class C 120 sx circulated
		10-5/8"	8-5/8"	2424'	1500 sx Class C 350 sx circulated
	Perf 2550-65'				
	Perf 3702-18' 3726-28' Aband.	7-3/4"	5-1/2"	4971'	1330 sx Class C
	Perf 4475-4504' Aband.	TOC By Cement Bond Log is Above 4200'			
Perf 4582-98 Gray plug					
	Perf 5236-114 (De laume)				
	Perf 5402-17 (De laume)				
	Perf 7975-8000' (small)				
	Perf 8390-8400' (Bond spring)				
	Untested 1st B.S. SS				
	PBTD 8511				
	TD 8550'				
				Open Hole to TD	
			4 1/2"	8570'	600 sks 50/50 Pox Class H.