


Fill-up connection

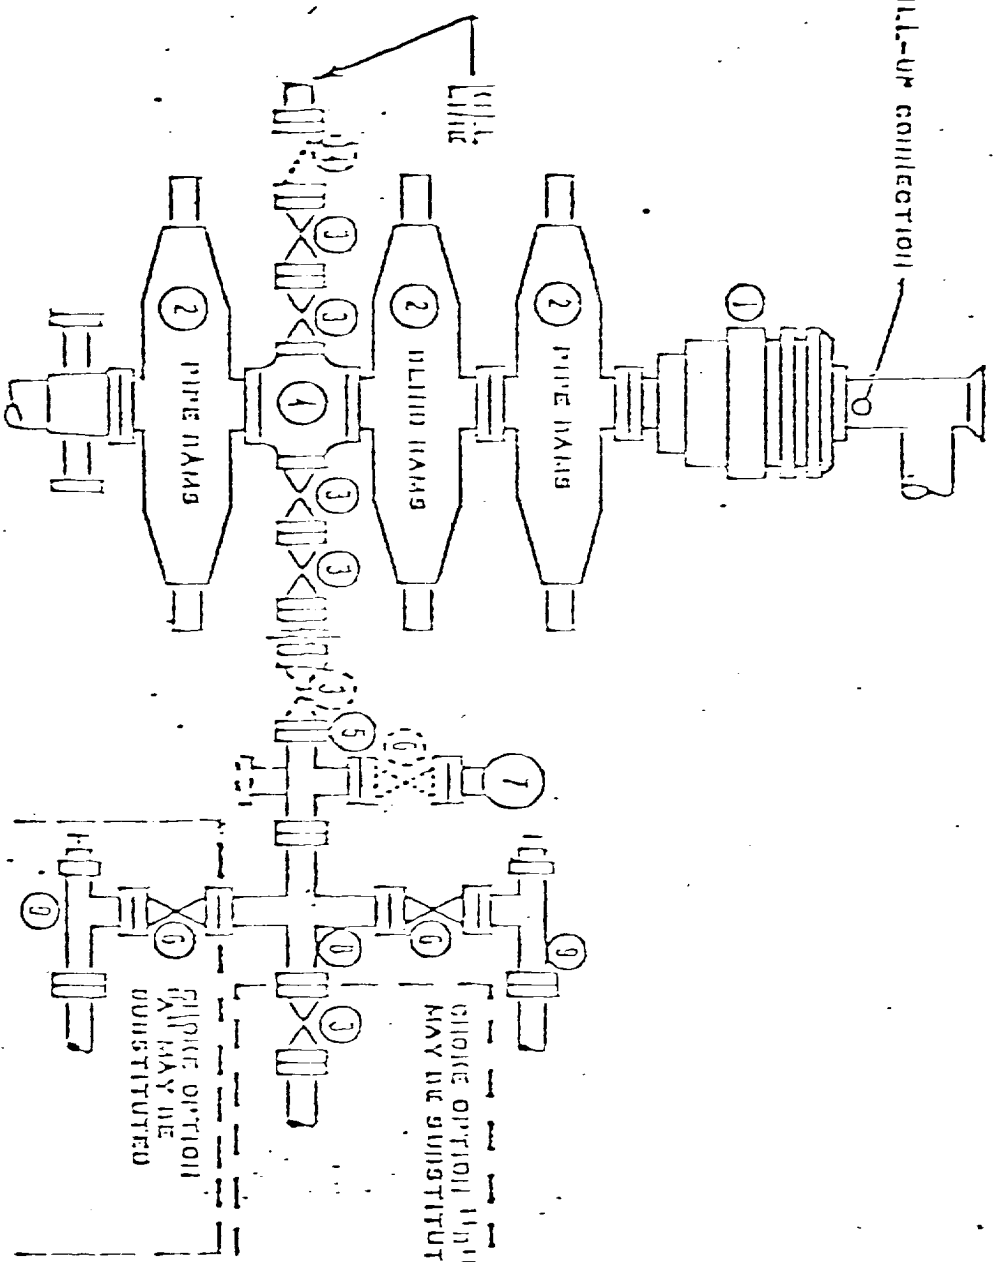

1. GEN. THRU HYDRAULIC
2. DEN, 1500 HAM-TYPE WOP (8)
3. 3" DEN, 1500 VALVE
4. DEN, 1500 DRILLING STROOL
5. 3" DEN, 1500 X 2" DEN, 1500 STEEL TEE
6. 2" DEN, 1500 VALVE
7. 2" DEN PRESSURE GUAGE
8. 3" DEN, 1500 X 2" DEN, 1500 STEEL CROSS
9. 2" DEN, 1500 ADJ. CHOICE
10. 2" DEN, 1500 ADJ. CHOICE
11. ADAPTED, 2" DEN 1500 X 10,000 L FLANGE MATHING 12 INLET
12. 10,000 LB W/ HEAVY DUTY CHOICE
13. HYDRAULIC CHOICE, 2500 LB W/ ON DETENT
14. 3" DEN, 1500 CHECK VALVE

NOTES

1. 5000 PSI W/ ON DETENT CLAMP JUMPS MAY BE SUBSTITUTED FOR FLANGES
2. ONE ADJUSTABLE CHOICE MAY BE REPLACED WITH A POSITIVE CHOICE
3. VALVES MAY BE EITHER HAND OR POWER OPERATED BUT, IF POWER OPERATED, THE VALVES FLANGED TO THE ROF MUST BE CAPABLE OF BEING OPENED AND CLOSED MANUALLY ON CLOSE OR POWER FAILURE AND BE CAPABLE OF BEING OPENED MANUALLY

5000 PSI WORKING PRESSURE BLOWOUT PREVENTER HOOK-UP (SERIES 1500 FLANGES ON DETT

RECEIVED
APR 6 1988
FBI
LOS ANGELES OFFICE

