

STATE OF NEW MEXICO
ENERGY AND MINERALS DEPARTMENT

OIL CONSERVATION DIVISION

P. O. BOX 2088

SANTA FE, NEW MEXICO 87501

Form C-103
Revised 10-1-75

NO. OF COPIES RECEIVED	
DISTRIBUTION	
SANTA FE	
FILE	
U.S.O.S.	
LAND OFFICE	
OPERATOR	

API# 30-025-28059

5a. Indicate Type of Lease	
State ☒	Fee ☐
5. State Oil & Gas Lease No.	
B-2317	

SUNDRY NOTICES AND REPORTS ON WELLS

(DO NOT USE THIS FORM FOR PROPOSALS TO DRILL OR TO DEEPEN OR PLUG BACK TO A DIFFERENT RESERVOIR. USE "APPLICATION FOR PERMIT -" (FORM C-101) FOR SUCH PROPOSALS.)

OIL WELL ☐ GAS WELL ☐ OTHER- Water Injection - Order R-7103

7. Unit Agreement Name

8. Farm or Lease Name

M. E. Hale

9. Well No.

16

10. Field and Pool, or Wildcat
Vacuum Grayburg/
San Andres

UNIT LETTER J 2630 FEET FROM THE south LINE AND 1330 FEET FROM

THE east LINE, SECTION 35 TOWNSHIP 17-S RANGE 34-E N.M.P.M.

15. Elevation (Show whether DF, RT, GR, etc.)

4010 GR

12. County

Lea

Check Appropriate Box To Indicate Nature of Notice, Report or Other Data

NOTICE OF INTENTION TO:

SUBSEQUENT REPORT OF:

PERFORM REMEDIAL WORK ☐	PLUG AND ABANDON ☐	REMEDIAL WORK ☐	ALTERING CASING ☐
TEMPORARILY ABANDON ☐	CHANGE PLANS ☐	COMMENCE DRILLING OPNS. ☒	PLUG AND ABANDONMENT ☐
PULL OR ALTER CASING ☐	OTHER ☐	CASING TEST AND CEMENT JOBS ☒	
		OTHER Total Depth ☒	

Describe Proposed or Completed Operations (Clearly state all pertinent details, and give pertinent dates, including estimated date of starting any proposed work) SEE RULE 1103.

2-23-83: Warton Rig #8 spudded 12- $\frac{1}{4}$ " hole @ 5:15 p.m. Set 9 jts of 8-5/8" 24# K-55, ST&C csg @ 360'. HOWCO cmtd w/400 sx class "C" w/2% CaCl. Circd 150 sx cmt. NU BOP, tested to 1000# for 30 mins, OK. Total WOC 13 hrs. Temp of cmt 65°, temp in formation 60°, estimated strength of cmt @ time of test 500 psi+, actual time cmt in place prior to test 13 hrs.

2-24 thru

3-5-83: Drlg.

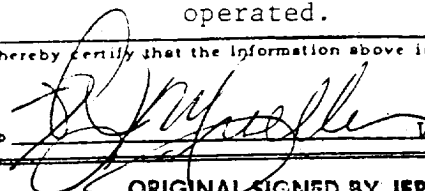
3-6-83: Reached TD of 4800'. Circd 2 hrs & pld up hole to 2000'. Circd & cond mud, chained out of hole.

3-7-83: Dresser-Atlas ran DLL/RXO/GR/Cal from TD to surface. Ran BHC Sonic. WIH & circd. POOH.

See reverse side

BOP Equip: Series 900, 3000# WP, double w/one set pipe rams, one set blind rams, manually operated.

I, I hereby certify that the information above is true and complete to the best of my knowledge and belief.

SIGNED  W. J. Mueller TITLE Senior Engineering Specialist DATE March 29, 1983

ORIGINAL SIGNED BY JERRY SEXTON

DISTRICT I SUPERVISOR

MAR 1 1983

APPROVED BY _____ TITLE _____ DATE _____

MO Rotary. LD DP & DC's. Set 123 jts 5-1/2" 15.5#, K-55, ST&C csg @ 4800'.
HOWCO cmt'd w/800 sx TLM w/10% salt, 1/2# 1 sx Flocel & 3#/sx Gilsontite followed
w/400 sx Class "C" w/6#/sx salt. Bmpd plug @ 2:00 p.m. 3-8-83. Max press
1300#. Bmpd plug @ 4:00 p.m. Circed 180 sx. ND. Set slips & cut off csg. Rel

NOBES OFFICE
O.C.D.
MAR 31 1983