

1. 1000 PSI WORKING PRESSURE

2. 3" SER. 1500 VALVE

3. SER. 1500 DRILLING STEEL

4. 3" SER. 1500 X 2" SER. 1500 STEEL TEE

5. 2" SER. 1500 VALVE

6. 2" MUD PRESSURE GAUGE

7. 3" SER. 1500 X 2" SER. 1500 STEEL CROSS

8. 2" SER. 1500 ADJ. CHOKE

9. 2" SER. 1500 ADJ. CHOKE ON 2" SER. 1500 INCH VALVE ON SIDE OUTLET OF 2" SER. 1500 STEEL TEE

10. ADAPTER, 2" SER. 1500 X 10,000 I FLANGE MATING 12 INLET

11. 10,000 LB WP REMOTE CHOKE

12. HYDRAULIC CHOKE, 2500 LB WP OR BETTER

13. 3" SER. 1500 CHECK VALVE


1000 PSI WP OR BETTER CLAMP BUSH MAY BE SUBSTITUTED FOR FLANGES

ONE ADJUSTABLE CHOKE MAY BE REPLACED WITH A POSITIVE CHOKE

VALVES MAY BE EITHER HAND OR POWER OPERATED BUT, IF POWER OPERATED, THE VALVES FLANGED TO THE BOP MUST BE CAPABLE OF BEING OPENED AND CLOSED MANUALLY OR CLOSE ON POWER FAILURE AND BE CAPABLE OF BEING OPENED MANUALLY

5000 PSI WORKING PRESSURE BLOWOUT PREVENTER HOOK-UP (SERIES 1500 FLANGES OR BET

EXHIBIT E

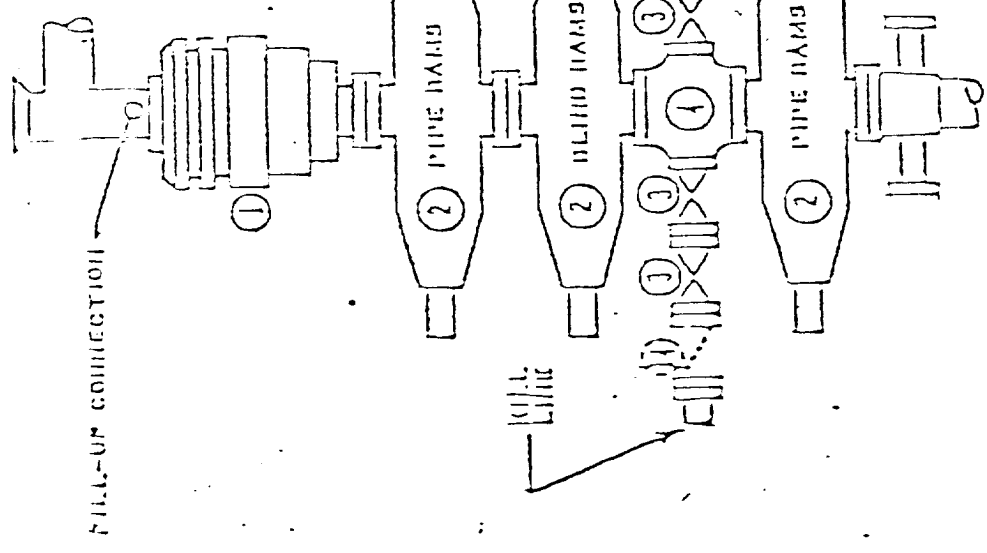

NOTES

1. 1000 PSI WP OR BETTER CLAMP BUSH MAY BE SUBSTITUTED FOR FLANGES


2. ONE ADJUSTABLE CHOKE MAY BE REPLACED WITH A POSITIVE CHOKE

3. VALVES MAY BE EITHER HAND OR POWER OPERATED BUT, IF POWER OPERATED, THE VALVES FLANGED TO THE BOP MUST BE CAPABLE OF BEING OPENED AND CLOSED MANUALLY OR CLOSE ON POWER FAILURE AND BE CAPABLE OF BEING OPENED MANUALLY

CHOKE OPTION 11 OR 12

CHOKE OPTION 11 OR 12

CHOKE OPTION 11 OR 12

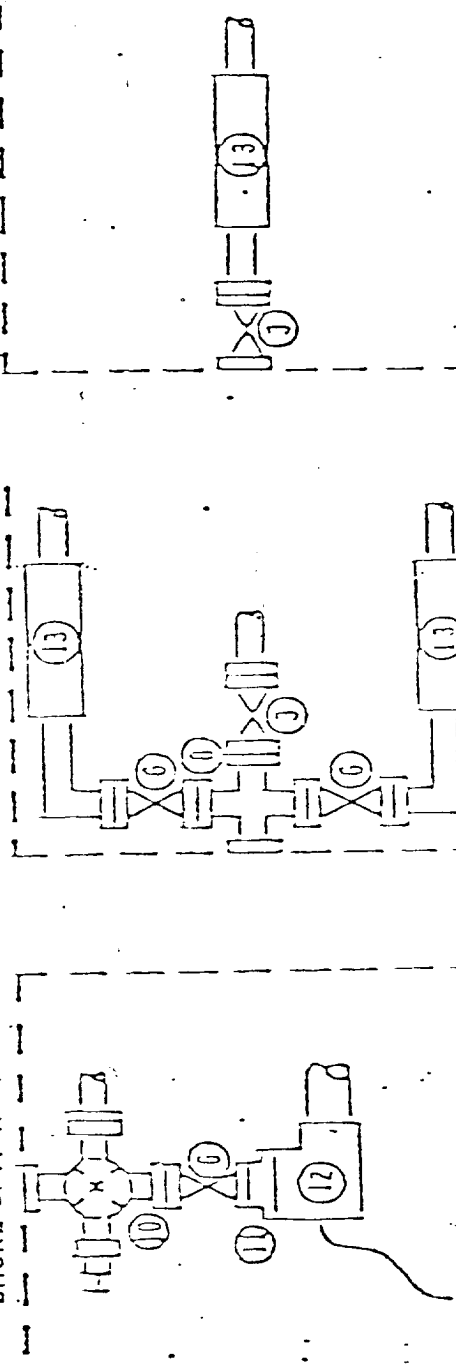

11

DEC 8 1983
HODGSON OFFICE