


FILL-UP CONNECTION

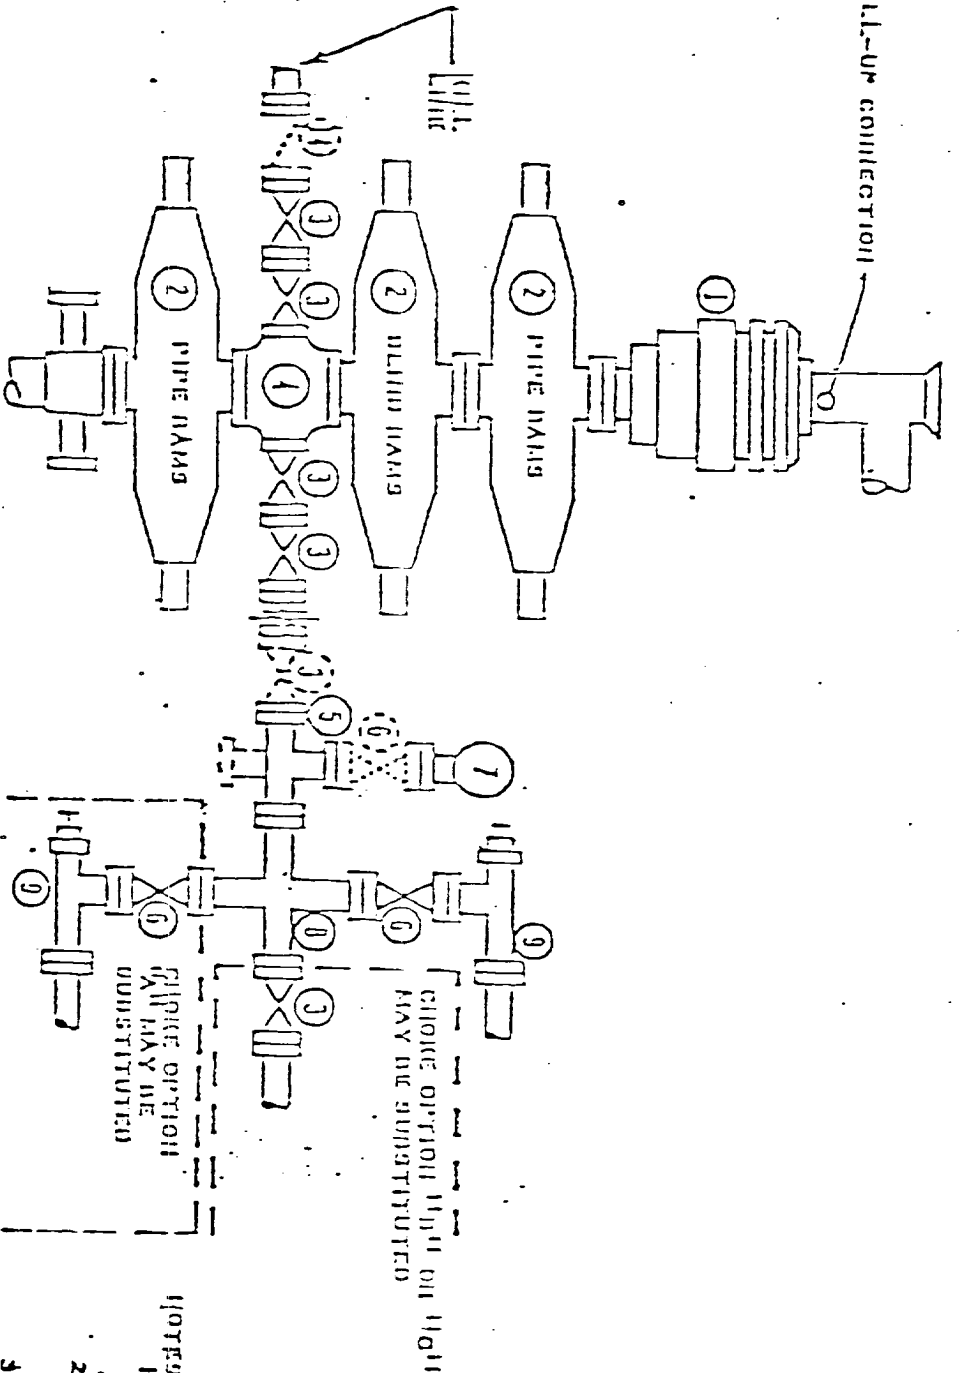

1 GEN. 1000 HYDRAULIC OIL

2 DEN. 1000 HAM-TYPE HOSE (8)

3 3" GEN. 1500 VALVE

4 DEN. 1500 BULLDOG SPOOL

5 3" GEN. 1500 X 2" GEN. 1500 STEEL TEE

6 2" GEN. 1500 VALVE

7 2" AND PRESSURE GAUGE

8 3" GEN. 1500 X 2" GEN. 1500 STEEL CROSS

9 2" GEN. 1500 ADJ. CHOKE

10 2" GEN. 1500 ADJ. CHOKE OR 2" GEN. 1500 HISEN VALVE OR 3" GEN. 1500 STEEL TEE

11 ADAPTER, 2" GEN. 1500 X 10,000 FLANGE MATHING 12 INLET

12 10,000 LB WP REMOTE CHOKE

13 HYDRAULIC CHOKE, 2500 LB WP OR BETTER

14 3" GEN. 1500 CHECK VALVE

1. 5000 PSI WP OR BETTER CLAMP BURS MAY BE SUBSTITUTED FOR FLANGES
2. ONE ADJUSTABLE CHOKE MAY BE REPLACED WITH A POSITIVE CHOKE
3. VALVES MAY BE EITHER HAND OR POWER OPERATED BUT, IF POWER OPERATED, THE VALVES FLANGED TO THE HOSE MUST BE CAPABLE OF BEING OPENED AND CLOSED MANUALLY OR CLOSED ON POWER FAILURE AND BE CAPABLE OF BEING OPENED MANUALLY

5000 PSI WORKING PRESSURE BLOWOUT PREVENTER HOOK- (SERIES 1500 FLANGES ON DETT

RECEIVED
JAN 17 1984
C.D.D.
HOBBS OFFICE

127
127
127