


CONDITION II-B 3000 WP
FOR AIR DRILLING OR
WHERE YATES AIR BLOWS ARE EXPECTED

H₂S TRIM RECORD
YES _____ NO _____

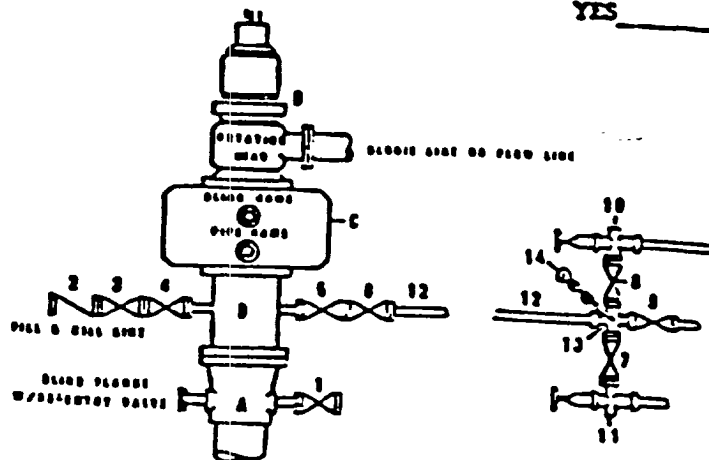

INSTALLING CONTROL

MATERIAL LIST - CONDITION II - B
FOR AIR DRILLING

- A Texaco Wellhead
- B 3000 WP drilling spool with a 2" minimum flanged outlet for kill-line and 3" minimum flanged outlet for choke line
- C 3000 WP dual ram type preventer, hydraulic operated with 1" steel, 3000 WP control lines (where sub-structure height is adequate, 2-3000 WP single ram type preventers may be utilized.)
- D Rotating Head and extended Electric Line.
- 1, 3, 4, 7, 8 2" minimum 3000 WP flanged full opening steel gate valve, or Halliburton Le Torr Plug valve.
- 2 2" minimum 3000 WP back pressure valve
- 3, 6, 9 3" minimum 3000 WP flanged full opening steel gate valve, or Halliburton Le Torr Plug valve.
- 12 3" minimum schedule 80, Grade "B", seamless line pipe
- 13 2" minimum x 3" minimum 3000 WP flanged cross
- 10, 11 2" minimum 3000 WP adjustable choke bodies
- 14 Cameron Mud Gauge or equivalent (location optional in choke line.)

				TEXACO, INC. PRODUCING DEPARTMENT (S) (S) (S) MIDLAND, TEXAS	
DATE	DATE	REV. NO.	REV. NO.		
DESIGNED BY					
CHECKED BY					
APPROVED BY					

EXHIBIT C

RECEIVED
DEC 14 1963
MOBILE OFFICE

10-11-1941