

RIG 7 9,000' – 14,000'

**MORANCO
DRILLING, INC.**

P.O. Box 1860 • Hobbs, New Mexico 88240 • 505/397-3511 • 915/563-0562

DRAWWORKS

Brewster N-75
Drum: 1¼" Lebus grooved
Compound: 2-engine oil bath chain drive
Brake: Hydromatic Parkersburg 40"
Satellite Automatic Driller
Duo-O-Matic Crown Block Protector

ENGINES

Two 610-H.P. D379TA Caterpillar Diesel.

DERRICK

Lee C. Moore, 131', 550,000-lb. nominal capacity.

SUBSTRUCTURE

Lee C. Moore, 14½' high, 550,000-lb. nominal capacity.

MUD PUMPS

Pump No. 1: Emsco DB700. 700-H.P. with steel fluid end.
4¾" – 7¾" liners, 16" stroke. Compound driven.
Pump No. 2: Emsco 500. 500-H.P. powered by D379
Caterpillar Diesel.

DRILL STRING

3,000' 4½" Grade E, 20-lb.
Tool Joints: 4½" XH, 6¼" OD.
11,000' 4½" Grade E, 16 60-lb.
Tool Joints: 4½" XH, 6¼" OD.
Thirty Drilco spiral-grooved 6½" OD, 2¼" ID with 4¼" H-90
Joints.
Other sized drillpipe and drillcollars available.

BLOWOUT PREVENTERS

One Shaffer LWS hydraulic double 11" x 5,000 p.s.i. One
Hydril 11" x 5,000 p.s.i. Choke manifold 4" x 5,000 p.s.i.
flanged connections. Payne 4-valve accumulator closing
unit.

MUD SYSTEM

Three 30' x 7½' x 6' steel pits with 700-bbl capacity and
one 250-bbl slug pit. Complete low pressure circulating
system, consisting of four submerged mud guns and two
countersunk jets in each pit. System utilizes a 6 x 8
centrifugal pump, powered by diesel.

MUD HOUSE

One 8' x 30' Steel Storage House.

COMMUNICATIONS

24-hour direct telephone interconnection through Hobbs
(505/393-1111) or Midland-Odessa (915/563-0562).

OTHER EQUIPMENT

BLOCKS. 350-ton.

HOOK. 350-ton.

SWIVEL. 350-ton.



ROTARY TABLE. 20½".

SHALE SHAKER. Harrisburg single screen.

ELECTRICAL POWER. Two 50-kw AC generators powered
by diesel engines. AC fluorescent or mercury lights. All
vapor-proof.

FRESH WATER STORAGE. Three 500-bbl horizontal tanks.

HOUSING. One 12' x 65' air-conditioned trailer house with
sleeping and cooking facilities.

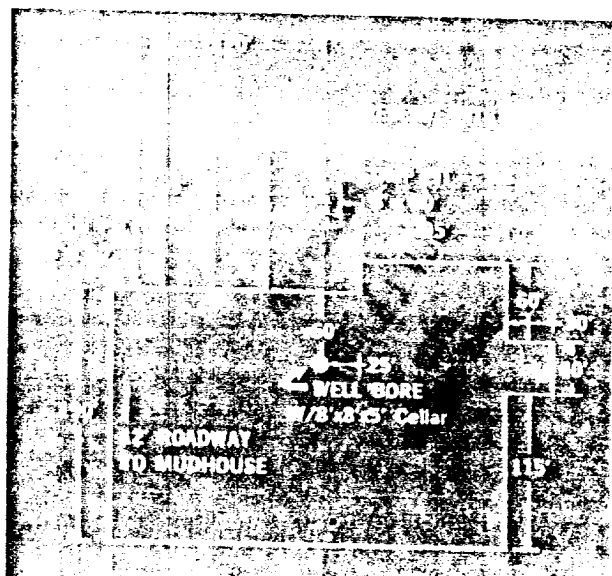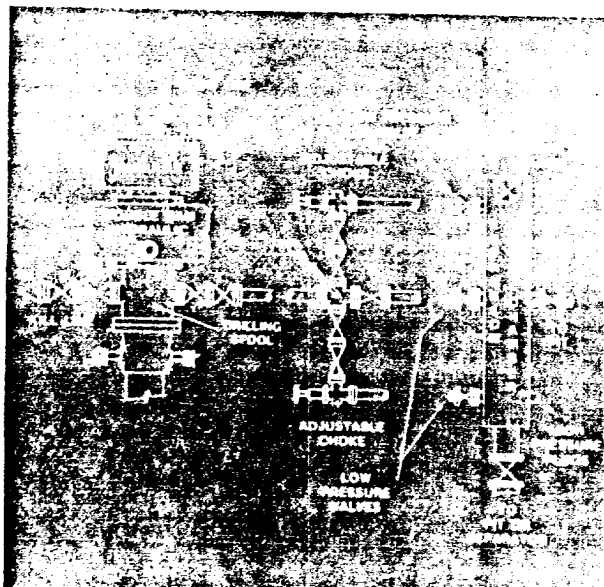

RECEIVED
NOV 16 1987
OCD
HOBBS OFFICE