

OPER. OGRID NO. 13925
PROPERTY NO. 20352
POOL CODE 83280
EFF. DATE 2/3/97
API NO. 30-025-33811

UNITED
DEPARTMENT OF
BUREAU OF LAND

FORM APPROVED
OMB NO. 1004-0136
Expires February 28, 1995

APPLICATION FOR PER.

1a. TYPE OF WORK
Drill ☒ Deepen ☐
b. TYPE OF WELL
Oil Well ☐ Gas Well ☒ Other ☐ Single Zone ☐ Multiple Zone ☐
2. NAME OF OPERATOR
Mallon Oil Company
3. ADDRESS AND TELEPHONE NO.
P.O. Box 3256
Carlsbad, NM 88220 (505) 885-4596
4. LOCATION OF WELL (Report location clearly and in accordance with any State requirements.)
At surface 1980' FSL and 1780' FWL (NE SW) Unit K
At proposed prod. zone 1980' FSL and 1780' FWL (NE SW) Unit K
14. DISTANCE IN MILES AND DIRECTION FROM NEAREST TOWN OR POST OFFICE*
36 miles east of Hobbs, New Mexico
15. DISTANCE FROM PROPOSED*
LOCATION TO NEAREST
PROPERTY OR LEASE LINE, FT. 1780'
(Also to nearest drlg. unit line, if any)
18. DISTANCE FROM PROPOSED LOCATION*
TO NEAREST WELL, DRILLING, COMPLETED,
OR APPLIED FOR, ON THIS LEASE, FT. 2640'
16. NO. OF ACRES IN LEASE 1281
17. NO. OF ACRES ASSIGNED
TO THIS WELL 320
19. PROPOSED DEPTH 13,800'
20. ROTARY OR CABLE TOOLS
Rotary
21. ELEVATIONS (SHOW WHETHER DF, RT, GR, Etc.) 3735 GR
22. APPROX. DATE WORK WILL START
March 1, 1997

5. LEASE DESIGNATION AND SERIAL NO
NM-056376
6. IF INDIAN, ALLOTTEE OR TRIBE NAME
N/A
7. UNIT AGREEMENT NAME
Mescalero Ridge Unit
8. FARM OR LEASE NAME, WELL NO.
Mescalero Ridge Unit 21 Fed
9. API WELL NO.
5
10. FIELD AND POOL, OR WILDCAT
Quail Ridge, Morrow
11. SEC., T., R., M., OR BLK.
AND SURVEY OR AREA
Sec. 21, T19S-R34E
12. COUNTY OR PARISH
Lea County
13. STATE
NM

SIZE OF HOLE	GRADE, SIZE OF CASING	WEIGHT PER FOOT	SETTING DEPTH	QUANTITY OF CEMENT
25"	20"	42#	40'	Ready mix to surface
17-1/2"	13-3/8"	48#	500'	270 sx or circ to surface
12-1/4"	9-5/8"	36# & 40#	5000'	800 sx Poz, 2000 sx 40" S.S.
7-7/8"	5-1/2"	17#	13,800'	930 sx "C" modified
100 sx Class C				

Mallon Oil Company proposes to drill to a depth sufficient to test the Morrow formation for gas. If productive, 5-1/2" casing will be cemented at TD. If non-productive, the well will be plugged and abandoned in a manner consistent with Federal regulations. Specific programs as per on-shore Oil and Gas Order No. 1 are outlined in the following attachments:

Drilling Program

Exhibit 1: Blow Out Preventor Equipment/Plan
Exhibit A: Location and Elevation Plat
Exhibit B: Existing Roads/Planned Access Roads
Exhibit C: One Mile Radius Map
Exhibit D: Drilling Site Layout
Exhibit E: Production Facilities
Exhibit F: Hydrogen Sulfide Drilling Plan

IN ABOVE SPACE DESCRIBE PROPOSED PROGRAM: If proposal is to deepen, give data on present productive zone and proposed new productive zone. If proposal is to drill or deepen directionally, give pertinent data on subsurface locations and measured and true vertical depths. Give blowout preventer program, if any.

24. SIGNED: Duane C. Winkler TITLE: Production Superintendent DATE: 11/19/96

(This space for Federal or State office use)

PERMIT NO. _____ APPROVAL DATE _____

Application approval does not warrant or certify that the applicant holds legal or equitable title to those rights in the subject lease which would entitle the applicant to conduct operations thereon.

CONDITIONS OF APPROVAL, IF ANY:

APPROVED BY: ORIG SCL: [Signature] FERGUSON TITLE: ADM [Signature] DATE: 12/16/96

*See Instructions On Reverse Side

Title 18 U.S.C. Section 1001, makes it a crime for any person knowingly and willfully to make to any department or agency of the United States any false, fictitious or fraudulent statements or representations as to any matter within its jurisdiction.

DISTRICT I

P.O. Box 1900, Hobbs, NM 88241-1900

DISTRICT II

P.O. Drawer 88, Artesia, NM 88211-0088

DISTRICT III

1990 Rio Brazos Rd., Artesia, NM 87410

DISTRICT IV

P.O. Box 2088, Santa Fe, N.M. 87504-2088

State of New Mexico

Energy, Minerals and Natural Resources Department

Form C-102

Revised February 10, 1994

Submit to Appropriate District Office

State Lease - 4 Copies

Fee Lease - 3 Copies

OIL CONSERVATION DIVISION

P.O. Box 2088

Santa Fe, New Mexico 87504-2088

AMENDED REPORT

WELL LOCATION AND ACREAGE DEDICATION PLAT

API Number 30-025-33811	Pool Code 83280	Pool Name Quail Ridge Morrow
Property Code 20358	Property Name MESCALERO RIDGE UNIT 21 Federal	Well Number 5
UGRD No. 13925	Operator Name MALLON OIL COMPANY	Elevation 3735

Surface Location

UL or lot No.	Section	Township	Range	Lot Idn	Feet from the	North/South line	Feet from the	East/West line	County
K	21	19 S	34 E		1780	SOUTH	1980	WEST	LEA

Bottom Hole Location If Different From Surface

UL or lot No.	Section	Township	Range	Lot Idn	Feet from the	North/South line	Feet from the	East/West line	County

Dedicated Acres	Joint or Infill	Consolidation Code	Order No.
320 ac 5/2			

NO ALLOWABLE WILL BE ASSIGNED TO THIS COMPLETION UNTIL ALL INTERESTS HAVE BEEN CONSOLIDATED
OR A NON-STANDARD UNIT HAS BEEN APPROVED BY THE DIVISION

	OPERATOR CERTIFICATION I hereby certify that the information contained herein is true and complete to the best of my knowledge and belief. Signature Duane C. Winkler Printed Name Production Superintendent Title 12/17/96 Date
	SURVEYOR CERTIFICATION I hereby certify that the well location shown on this plat was plotted from field notes of actual surveys made by me or under my supervision and that the same is true and correct to the best of my belief. DEC 11, 1996 Date Surveyed Signature RONALD S. EDSON Professional Surveyor 12-12-96 Date JOHN A. SEIT Commission No. RONALD S. EDSON State CARDINAL PROFESSIONAL SURVEYOR 575 3239 12641

* Dedicated 320 equals 5 1/2

OPERATOR'S COPY

Form 200-4
(June 1983)UNITED STATES
DEPARTMENT OF THE INTERIOR
BUREAU OF LAND MANAGEMENTSUNDRY NOTICES AND REPORTS ON WELLS
Do not use this form for proposals to drill or to deepen or reentry to a different reservoir.
Use "APPLICATION FOR PERMIT -" for such proposals.OTHER AGENCY USE
Bureau Form 100-102 (10/82)
Bureau March 31, 19835. Lease Designation and Serial No.
NM-056376

6. If Indian, Name of Tribe Name

N/A

7. If Unit or CA Agreement Designation

Mescalero Ridge Unit

8. Well Name and No.

Mescalero Ridge Unit 21 No. 5

9. Well API No.

30-025-

10. Field and Pool or Subterranean Area
NE Lea Delaware

11. County or Parish, State

Lea County, New Mexico

SUBMIT IN TRIPlicate

1. Type of Well

☐ Oil Well ☒ Gas Well ☐ Other

2. Name of Operator

Mallon Oil Company

3. Address and Telephone No.

P.O. Box 3256, Carlsbad, NM 88220

(505) 885-4596

4. Location of Well (Footage, Sec., T., R., W., or Survey Designation)

1980' FSL & 1780' FWL (NE SW) Unit K
Sec. 21, T19S-R34E

12. CHECK APPROPRIATE BOX(S) TO INDICATE NATURE OF NOTICE, REPORT, OR OTHER DATA

TYPE OF SUBMISSION

- ☐
- Notice of Intent
-
- ☒
- Subsequent Report
-
- ☐
- Final Abandonment Notice

TYPE OF ACTION

- ☐
- Abandonment
-
- ☐
- Recompletion
-
- ☐
- Plugging Back
-
- ☐
- Casing Repair
-
- ☐
- Altering Casing
-
- ☒
- Other Change location
-
- ☐
- Change of Plans
-
- ☐
- New Construction
-
- ☐
- Non-Routine Fracturing
-
- ☐
- Water Shut-Off
-
- ☐
- Conversion to Injection
-
- ☐
- Dispose Water

(Note: Report results of multiple stimulation on well
Completion or Recompletion Report and Log form.)13. Describe Proposed or Completed Operations (Clearly state all pertinent details and give pertinent dates, including estimated date of starting any proposed work, if well is directionally drilled, give
subsurface locations and measured and true vertical depths for all markers and zones pertinent to this zone.)Mallon Oil Company will move the location for the above referenced well to 1780' FSL and
1980' FWL (NE SW) Unit K, Sec. 21, T19S-R34E, Lea County, New Mexico.RECEIVED
DEC 18 8 32 AM '96
BUREAU OF LAND MANAGEMENT
U.S. DEPARTMENT OF THE INTERIOR

14. I hereby certify that the foregoing is true and correct.

Signed

Duane C. Winkler

Title

Production Superintendent

Date

12-17-96

(THIS SPACE FOR FEDERAL OR STATE OFFICE USE)

Approved By (ORIG. SGD.) ALEXIS C. SWOBODA

Title

PETROLEUM ENGINEER

Date

DEC 24 1996

Conditions of approval, if any:

Title 18 U.S.C. Section 1001, makes it a crime for any person knowingly and willfully to make any statement or agency of the United States any false, fictitious or fraudulent statements or representations as
to any matter within its jurisdiction.

*See instruction on Reverse Side

DRILLING PROGRAM

Attached to Form 3160-3
Mallon Oil Company
Mescalero Ridge Unit 21 No. 5
NE SW, 1980' FSL and 1780' FWL Unit K
Sec. 21, T19S-R34E
Lea County, New Mexico
Lease Number: NM-056376

1. Geologic Name of Surface Formation : Quaternary Alluvium
2. Estimated Tops of Important Geologic Markers

Quaternary Alluvium	Surface	San Andres	5446'
Rustler	1687'	Delaware	6130'
Top of Salt	1711'	Bone Springs	8136'
Base of Salt	3194'	Wolfcamp	10,786'
Yates	3380'	Strawn	12,192'
7 Rivers	3846'	Atoka	12,463'
Queen	4554'	Morrow	12,796'
Grayburg	5118'	TD	13,800'

3. The Estimated Depths of Anticipated Fresh Water, Oil or Gas:

Quaternary Alluvium	300'	Fresh water
Bone Springs	8400'	Oil
Morrow	13,000'	Gas

No other formations are expected to give up oil, gas, or fresh water in measurable quantities. The surface fresh water sands will be protected by setting 13-3/8" casing at 500' and circulating cement back to surface. Potash will be protected by setting 9-5/8" casing at 5000' and circulating cement back to surface.

Any shallower zones above TD which contain commercial quantities of oil and/or gas will have cement circulated across them by inserting a cementing stage tool into the 5-1/2" production casing which will be run to TD.

4. Proposed Casing Program:

<u>Hole Size</u>	<u>Interval</u>	<u>Casing OD</u>	<u>Casing weight grade, Jt., Type Cond</u>
25"	0'-40'	20"	Conductor, 0.25" wall thickness
17-1/2"	0'-500'	13-3/8"	48# H40 STC
12-1/4"	500'-5000'	9-5/8"	500'-2500' 9-5/8" 36# K-55 STC 2500'-5000' 9-5/8" 40# S80 STC
7-7/8"	5000'-TD	5-1/2"	0'-2800' 5-1/2" 17# N80 Butt 2800'-9000' 5-1/2" 17# N80 LTC 9000'-TD 5-1/2" 17# S95 LTC

Cement Program:

20" Conductor casing:	Cemented with ready-mix to surface
13-3/8" Surface casing:	<u>Lead Slurry:</u> 270 sks 35:65 Poz + 6% gel + 1/2# Celloseal + 2% CaCl ₂ <u>Tail:</u> 200 sks Class C + 1/4# Celloseal + 2% CaCl ₂
9-5/8" Intermediate casing:	<u>Lead Slurry:</u> 800 sks 35:65 Poz + 6% gel + 1/4# Celloseal + 2% CaCl ₂ . <u>Tail:</u> 200 sks Class C + 1/4# Celloseal + 2% CaCl ₂
5-1/2" Production casing:	930 sks Super C modified + 15# Poz A + 11# BA-90 + 8# gilsonite + .44# FL-52 + .44# FL-25 This cement slurry is designed to bring TOC to 5000'

5. Minimum Specifications for Pressure Control:

The blowout preventer equipment (BOP) shown in Exhibit #1 will consist of a double ram-type (3000 psi WP) preventer and a bag-type (hydril) preventer (3000 psi WP). Both units will be hydraulically operated and the ram-type preventer will be equipped with blind rams on top and 4-1/2" drill pipe rams on bottom. Both BOPs will be nipped up on 13-3/8" surface casing and used continuously until TD is reached. All BOPs and accessory equipment will be tested to 1000 psi before drilling out of surface casing. Before drilling out of intermediate casing, the ram-type BOP and accessory equipment will be tested to 3000 psi and the hydril to 70% or rated working pressure (2100 psi). Pipe rams will be operationally checked each 24 hour period. Blind rams will be operationally checked on each trip out of the hole. These checks will be noted on the daily tour sheets. A 2" kill line and 3" choke line will be included in the drilling spool located below the ram-type BOP. Other accessories to the BOP equipment will include a kelly cock and floor safety valve (inside BOP) and choke lines and choke manifold with 3000 psi WP rating.

6. Types and Characteristics of the Proposed Mud System:

The well will be drilled to TD with a combination of brine, cut brine, and polymer/KCL mud system. The applicable depths and properties of this system are as follows:

Depth	Type	Weight (ppg)	Viscosity (sec)	Water loss (cc)
0'-500'	Fresh Water (spud)	8.5	40-45	N.C.
500'-5000'	Brine Water	10.0	30	N.C.
5000'-TD	Cut Brine/Brine Water	8.8-10.0	32-34	10-12 cc

Sufficient mud materials to maintain mud properties and meet minimum lost circulation and weight increase requirements will be kept at the well site at all times.

7. Auxiliary Well Control and Monitoring Equipment:

- (A) A Kelly cock will be kept in the drill string at all times.
- (B) A full opening drill pipe stabbing valve (inside BOP) with proper drill pipe connections will be on the rig floor at all times.
- (C) An electronic pit-volume-totalizer system will be used continuously below 9000' to monitor the mud and pump system. The drilling fluids system will also be visually monitored at all times.

- (D) A mud logging unit complete with H₂S detector will be continuously monitoring drilling penetration rate and hydrocarbon shows from 5000; to TD.

8. Testing, Logging and Coring Program:

- (A) Drill stem tests will be run on the basis of drilling shows.
- (B) The electric logging program will consist of GR-Dual Laterolog-MSFL and GR-Sonic from TD to intermediate casing and GR-Compensated-Neutron-Density from TD to surface. Selected SW cores will be taken in zones of interest.
- (C) No conventional coring is anticipated.
- (D) Further testing procedures will be determined after the 5-1/2" production casing has been cemented at TD based on drill shows, log evaluation and drill stem test results.

9. Abnormal Conditions, Pressures, Temperatures, & Potential Hazards:

No abnormal pressures or temperatures are anticipated. The estimated bottom hole temperature (BHT) at TD is 195° F and estimated maximum bottom hole pressure (BHP) is 5000 psig. No hydrogen sulfide or other hazardous gases or fluids have been encountered, reported or are known to exist at this depth in this area. No major loss circulation zones have been reported in offsetting wells.

10. Anticipated Starting Date and Duration of Operations:

Road and location work will not begin until approval has been received from the BLM. The anticipated spud date is March 1, 1997. Once commenced, the drilling operation should be finished in approximately 40 days. If the well is productive, an additional 30 days will be required for completion and testing before a decision is made to install permanent facilities.

MINIMUM BLOWOUT PREVENTER REQUIREMENTS

3,000 psi Working Pressure

3 MWP

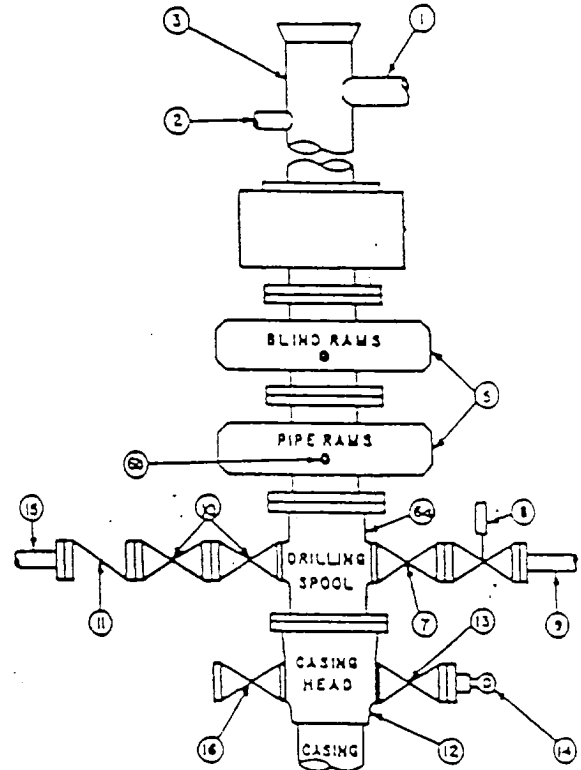
STACK REQUIREMENTS

No.	Item	Min. I.D.	Min. Nominal
1	Flowline		
2	Fill up line		2"
3	Drilling nipple		
5	Two single or one dual hydraulically operated rams		
6a	Drilling spool with 2" min. kill line and 3" min choke line outlets		
6b	2" min. kill line and 3" min. choke line outlets in ram. (Alternate to 6a above.)		
7	Valve Gate <input type="checkbox"/> Plug <input type="checkbox"/>	3-1/8"	
8	Gate valve—power operated	3-1/8"	
9	Line to choke manifold		3"
10	Valves Gate <input type="checkbox"/> Plug <input type="checkbox"/>	2-1/16"	
11	Check valve	2-1/16"	
12	Casing head		
13	Valve Gate <input type="checkbox"/> Plug <input type="checkbox"/>	1-1/2/16"	
14	Pressure gauge with needle valve		
15	Kill line to rig mud pump manifold		2"

OPTIONAL

16	Flanged valve	1-1/2/16"	
----	---------------	-----------	--

CONFIGURATION A



CONTRACTOR'S OPTION TO FURNISH:

1. All equipment and connections above bradenhead or casinghead. Working pressure of preventers to be 3,000 psi, minimum.
2. Automatic accumulator (80 gallon, minimum) capable of closing BOP in 30 seconds or less and, holding them closed against full rated working pressure.
3. BOP controls, to be located near drillers position.
4. Kelly equipped with Kelly cock.
5. Inside blowout preventer or its equivalent on derrick floor at all times with proper threads to fit pipe being used.
6. Kelly saver-sub equipped with rubber casing protector at all times.
7. Plug type blowout preventer tester.
8. Extra set pipe rams to fit drill pipe in use on location at all times.
9. Type RX ring gaskets in place of Type R.

MEC TO FURNISH:

1. Bradenhead or casinghead and side valves.
2. Washbushing if required.

GENERAL NOTES:

1. Deviations from this drawing may be made only with the express permission of MEC's Drilling Manager.
2. All connections, valves, fittings; piping, etc., subject to well or pump pressure must be flanged (suitable clamp connections acceptable) and have minimum working pressure equal to rated working pressure of preventers up through chokes. Valves must be full opening and suitable for high pressure mud service.
3. Controls to be of standard design and each marked, showing opening and closing position.
4. Chokes will be positioned so as not to hamper or delay changing of choke beans. Replaceable parts for adjustable choke, other bean sizes, retainers, and choke wrenches to be conveniently located for immediate use.
5. All valves to be equipped with handwheels or handles ready for immediate use.
6. Choke lines must be suitably anchored.

7. Handwheels and extensions to be connected and ready for use.
8. Valves adjacent to drilling spool to be kept open. Use outside valves except for emergency.
9. All seamless steel control piping (3000 psi working pressure) to have flexible joints to avoid stress. Hoses will be permitted.
10. Casinghead connections shall not be used except in case of emergency.
11. Do not use kill line for routine fill-up operations.

Exhibit 1

DISTRICT I
P.O. Box 1980, Hobbs, NM 88241-1980

State of New Mexico
Energy, Minerals and Natural Resources Department

Form C-102
Revised February 10, 1994
Submit to Appropriate District Office
State Lease - 4 Copies
Fee Lease - 3 Copies

DISTRICT II
P.O. Drawer DD, Artesia, NM 88211-0719

DISTRICT III
1000 Rio Brazos Rd., Aztec, NM 87410

OIL CONSERVATION DIVISION

P.O. Box 2088
Santa Fe, New Mexico 87504-2088

DISTRICT IV
P.O. Box 2088, Santa Fe, NM 87504-2088

☐ AMENDED REPORT

WELL LOCATION AND ACREAGE DEDICATION PLAT

API Number	Pool Code	Pool Name
Property Code	Property Name MESCALERO RIDGE UNIT 21	Well Number 5
OCRID No.	Operator Name MALLON OIL COMPANY	Elevation 3735

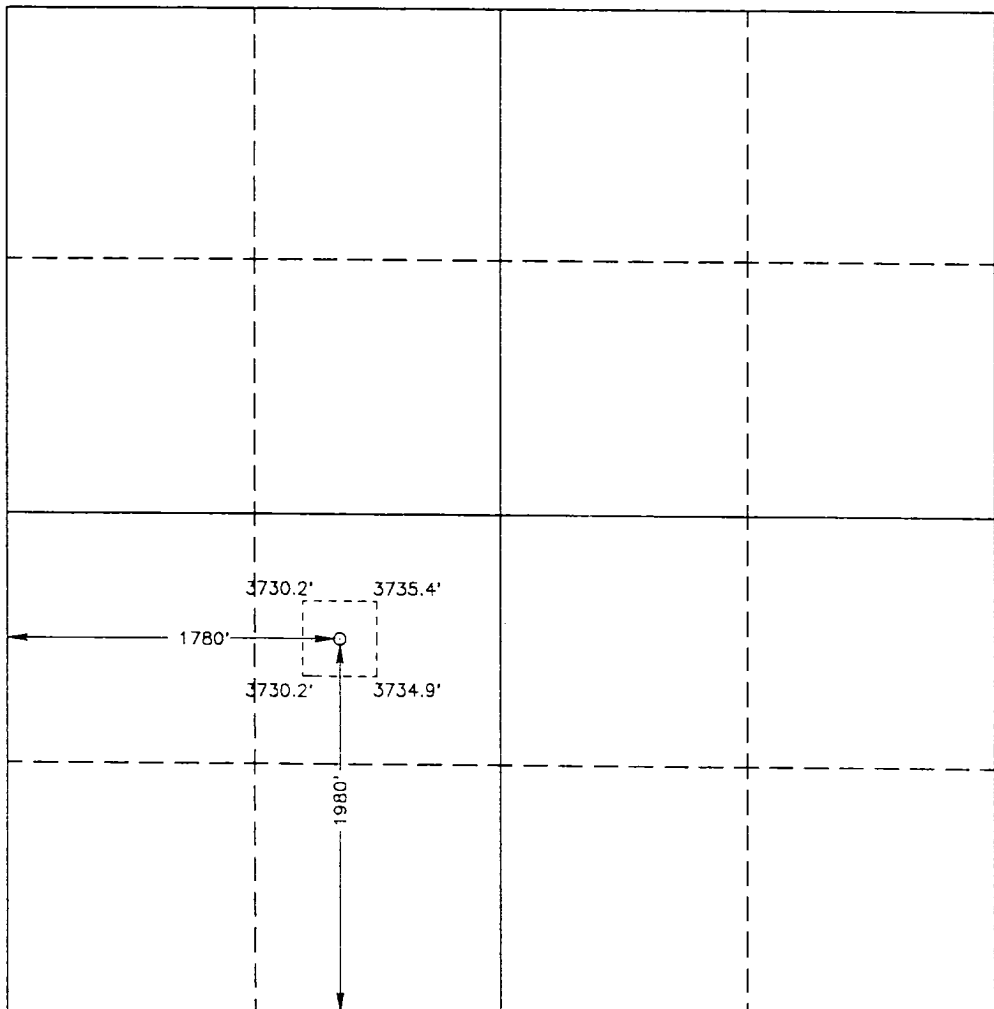


Surface Location

UL or lot No.	Section	Township	Range	Lot Idn	Feet from the	North/South line	Feet from the	East/West line	County
K	21	19 S	34 E		1980	SOUTH	1780	WEST	LEA

Bottom Hole Location If Different From Surface

UL or lot No.	Section	Township	Range	Lot Idn	Feet from the	North/South line	Feet from the	East/West line	County
Dedicated Acres	Joint or Infill	Consolidation Code	Order No.						

NO ALLOWABLE WILL BE ASSIGNED TO THIS COMPLETION UNTIL ALL INTERESTS HAVE BEEN CONSOLIDATED
OR A NON-STANDARD UNIT HAS BEEN APPROVED BY THE DIVISION

	<p>OPERATOR CERTIFICATION</p> <p>I hereby certify the the information contained herein is true and complete to the best of my knowledge and belief.</p> <p> Signature</p> <p>Duane C. Winkler Printed Name</p> <p>Production Superintendent Title</p> <p>11/18/96 Date</p> <p>SURVEYOR CERTIFICATION</p> <p>I hereby certify that the well location shown on this plat was plotted from field notes of actual surveys made by me or under my supervision, and that the same is true and correct to the best of my belief.</p> <p>NOVEMBER 13, 1996</p> <p>Date Surveyed JLP</p> <p>Signature & Seal of Professional Surveyor</p> <p> 11-15-96</p> <p>W.O. Chum. 96-1468</p> <p>Certificate No. 3239 W. WEST, 676 J. EIDSON, 3239 GARY G. EIDSON, 12641</p>
---	--