



H₂S Trim Required
Yes _____ No _____

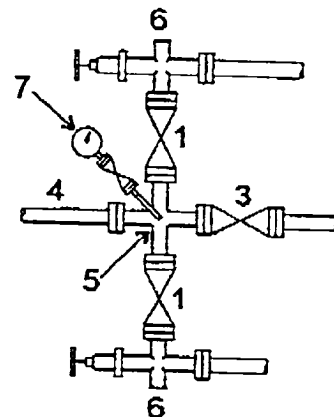

MATERIALS LIST

Item	Description	Qty.
A	Texaco wellhead.	1
B	5000# W.P. single ram type preventer, hydraulic operated with 1" steel, 5000# W.P. control lines.	1
C	3000# W.P. drilling spool with a 2" minimum flanged outlet for kill line and 3" minimum flanged outlet for choke line.	1
D	3000# W.P. dual ram type preventer, hydraulic operated 1" steel, 3000# W.P. control lines (where substructure height is adequate, 2 - 3000# W.P. single ram type preventers may be utilized.)	1
E	Rotating head with fill-up outlet and extended Blooie line.	1
1	2" minimum 3000# W.P. flanged full opening steel gate valve, or Halliburton Lo Torc plug valve.	5
2	2" minimum 3000# W.P. back pressure valve.	1
3	3" minimum 3000# W.P. flanged full opening steel gate valve, or Halliburton Lo Torc plug valve.	3
4	3" minimum schedule 80, Grade "B", seamless line pipe.	
5	2" minimum x 3" minimum 3000# W.P. flanged cross.	1
6	2" minimum 3000# W.P. adjustable choke body.	2
7	Cameron Mud Gauge or equivalent (location optional in choke line).	1
8	8-5/8" minimum steel flow line.	
9	2" minimum 3000# W.P. flanged or threaded full opening steel gate valve, or Halliburton Lo Torc plug valve.	1

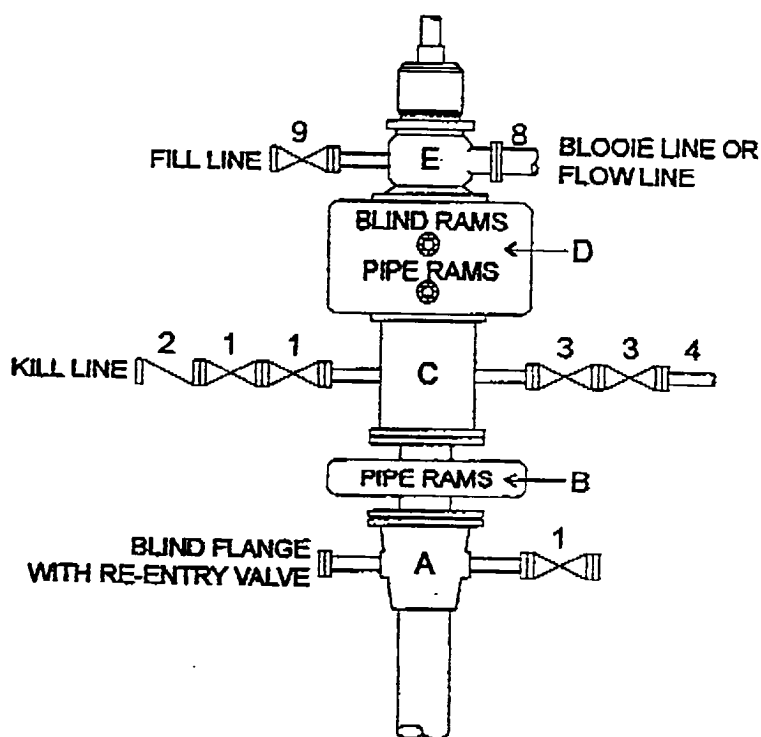

Drilling Control
Condition II-B 3000# W.P.
For air drilling or where nitrogen
or air blows are expected

Rev. 4/1/98

Exhibit C

Texaco
Denver Region
Denver, Colorado



