

TIMBR/SHARP DRILLING

B.O.P. Equipment Intended for use on Rig # 12

Well To Be drilled for TMBR/Sharp Drilling, Inc.

' All B.O.P equipment is H2S Trim '

' All Accumulators are Kookey Type-80 : Dual Power Electric/Air '

' Choke Manifold: " See sheet 2 '

4" Valves : Cameron F/FC, Shaffer DB Hydraulic

2" Check Valve: Cameron Type R

2" Valves : Cameron or Shaffer

Annular: Shaffer **Type:** Spherical

Annular PSI: 3000

(If Shaffer: Spherical , If Hydril: Type GK)

BOP Type LWS 2 Gate

(If Shaffer: LWS or SL, If Cameron: Type U)

BOP Size: 11 " - 3000 PSI

Rotating Head Type Smith

Rot-Head Furnished By TMBR/Sharp


Rams in top gate: Blinds

Rams in bottom: 4-1/2" pipe

Side Outlets used:

Bottom X Top

4" Valves on Tee

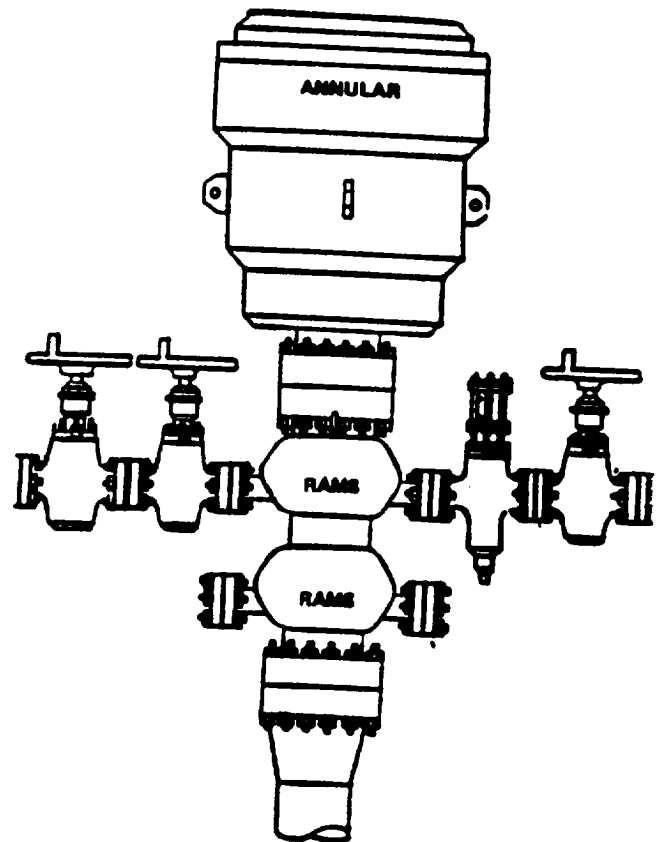

ABOVE DATE DOES NOT
INDICATE WHEN
CONFIDENTIAL LOGS
WILL BE RELEASED

ELF

5/24/01

Page 10