

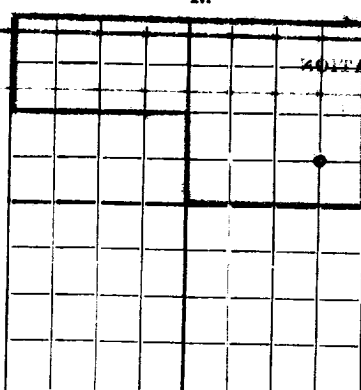
N.

## NEW MEXICO OIL CONSERVATION COMMISSION

Santa Fe, New Mexico

OF

MONT

AREA 640 ACRES  
LOCATE WELL CORRECTLY

## WELL RECORD

Mail to Oil Conservation Commission, Santa Fe, New Mexico, or its proper agent not more than twenty days after completion of well. Follow instructions in the Rules and Regulations of the Commission. Indicate questionable data by following it with (?). SUBMIT IN TRIPLICATE.

Gulf Oil Corporation

Company or Operator

J. W. Smith

Lease

Well No. 1 in SE NE of Sec. 34 T. 19S

R. 36E, N. M. P. M., Monument Field, Lea County.

Well is 660 feet south of the North line and 660 feet west of the East line of SE 1/4

If State land the oil and gas lease is No. Assignment No.

If patented land the owner is Address

If Government land the permittee is Address

The Lessee is Gulf Oil Corporation Address Tulsa, Oklahoma

Drilling commenced 5-4-36 19 Drilling was completed 6-9-36 19

Name of drilling contractor Leffland Address Tulsa, Okla.

Elevation above sea level at top of casing 3642 feet.

The information given is to be kept confidential until ? 19

## OIL SANDS OR ZONES

No. 1, from 3860 to 3970 No. 4, from to

No. 2, from to No. 5, from to

No. 3, from to No. 6, from to

## IMPORTANT WATER SANDS

Include data on rate of water inflow and elevation to which water rose in hole.

No. 1, from Rotary Hole to feet.

No. 2, from to feet.

No. 2, from to feet.

No. 4, from to feet.

## CASING RECORD

SIZE	WEIGHT PER FOOT	THREADS PER INCH	MAKE	AMOUNT	KIND OF SHOE	CUT & FILLED FROM	PERFORATED FROM TO	PURPOSE
10-3/4	32.75	8	Lapw.	258'				
7-5/8	26.4	8	Lapw.	1291				
5 1/2	17	10	Lapw.	3800				

## MUDDING AND CEMENTING RECORD

SIZE OF HOLE	SIZE OF CASING	WHERE SET	NO. SACKS OF CEMENT	METHOD USED	MUD GRAVITY	AMOUNT OF MUD USED
13-3/4	10-3/4	258'	300	Halliburton		
9-7/8	7-5/8	1291	300	"		
6-3/4	5 1/2	3800	300	"		

## PLUGS AND ADAPTERS

Heaving plug—Material Length Depth Set  
Adapters—Material Size

## RECORD OF SHOOTING OR CHEMICAL TREATMENT

SIZE	SHELL USED	EXPLOSIVE OR CHEMICAL USED	QUANTITY	DATE	DEPTH SHOT OR TREATED	DEPTH CLEANED OUT
		Hydro-Chloric A.	1000 gal	6-8-36		

Results of shooting or chemical treatment

## RECORD OF DRILL-STEM AND SPECIAL TESTS

If drill-stem or other special tests or deviation surveys were made, submit report on separate sheet and attach hereto.

## TOOLS USED

Rotary tools were used from 0 feet to 3970 feet, and from feet to feet

Cable tools were used from feet to feet, and from feet to feet

## PRODUCTION

Put to producing 6-9-36 19

The production of the first 24 hours was 948 barrels of fluid of which % was oil; %

emulsion; % water; and % sediment. Gravity, Be

If gas well, cu. ft. per 24 hours Gallons gasoline per 1,000 cu. ft. of gas

Rock pressure, lbs. per sq. in.

## EMPLOYEES

Driller  
Driller

## FORMATION RECORD ON OTHER SIDE

I hereby swear or affirm that the information given herewith is a complete and correct record of the well and all work done on it so far as can be determined from available records.

Subscribed and sworn to before me this 31st

day of July 1936

J. L. Briggs  
Notary Public.

Tulsa, Okla. July 31, 1936

Name J. W. Smith

Position General Superintendent

Representing

FORMATION RECORD

FROM	TO	THICKNESS IN FEET	FORMATION
0'	36'		Surface
	226		Sand and shells
	275		Red bed
	393		Gray sand
	1147		Red bed and shells
	1207		Red bed, red rock
	1272		Broken anhydrite
	1305		Anhydrite
	1310		Salt
	1325		Anhydrite
	1570		Salt, anhydrite, shells
	1590		Anhydrite
	1713		Salt, anhydrite
	1933		Salt, anhydrite, shells
	2183		Salt and anhydrite
	2355		Salt, anhydrite, shells
	2520		Salt
	2814		Gyp, anhydrite
	3009		Anhydrite
	3088		Anhydrite, line streaks
	3743		Line
	3970		Line