


## OIL CONSERVATION COMMISSION

Santa Fe, New Mexico

## MISCELLANEOUS REPORTS ON WELLS

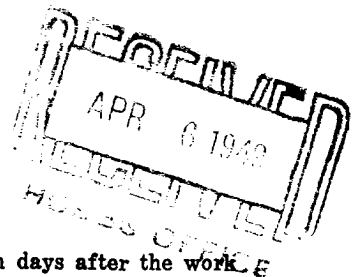

Submit this report in triplicate to the Oil Conservation Commission or its proper agent within ten days after the work specified is completed. It should be signed and sworn to before a notary public for reports on beginning drilling operations, results of shooting well, results of test of casing shut off, result of plugging of well, and other important operations, even though the work was witnessed by an agent of the Commission. Reports on minor operations need not be signed and sworn to before a notary public. See additional instructions in the Rules and Regulations of the Commission.

Indicate nature of report by checking below.

REPORT ON BEGINNING DRILLING OPERATIONS		REPORT ON REPAIRING WELL	
REPORT ON RESULT OF SHOOTING OR CHEMICAL TREATMENT OF WELL		REPORT ON PULLING OR OTHERWISE ALTERING CASING	
REPORT ON RESULT OF TEST OF CASING SHUT-OFF		REPORT ON DEEPENING WELL	
REPORT ON RESULT OF PLUGGING OF WELL		Report on Setting Casing	X

April 2, 1949

Date

Monument, New Mexico

Place

OIL CONSERVATION COMMISSION,  
SANTA FE, NEW MEXICO  
Gentlemen:

Following is a report on the work done and the results obtained under the heading noted above at the \_\_\_\_\_

Amerada Petroleum Corporation J.R. Phillips Well No. 7 in the \_\_\_\_\_  
Company or Operator Lease  
Set NE 1/4 of Sec. 1, T. 20S, R. 36E, N. M. P. M.,  
Wildcat Field, \_\_\_\_\_ Lea County.

The dates of this work were as follows: April 1, 1949

Notice of intention to do the work was ~~submitted~~ submitted on Form C-102 on April 1, 1949  
and approval of the proposed plan was ~~submitted~~ obtained. (Cross out incorrect words.)

## DETAILED ACCOUNT OF WORK DONE AND RESULTS OBTAINED

10216' Total Depth, Granite. Ran Schlumberger E.C. Survey & Gamma Ray & Checked bottom @ 10214'. Ran 62 jts. 5 1/2" OD. 17#, N-80, R-2, 8RT. Babcox & Wilcox SS Csg. (New) first 5 jts. Spet welded, 136 jts. 5 1/2" OD, 17# J-55, R-3, 8RT Reg. T&C Nat'l Tube S.S. Csg. (New), 63 jts. 5 1/2" OD, 17#, N-80, R-2, 8RT. Babcox & Wilcox, SS Csg. (New) Total of 261 jts. for 10,009.63' Set @ 10,004' W/13 Baker Centralizers @ 9985-9950-9915-9880-9845-9810-9775-9740-7585-7555-7525-7495-7465- & 26 Weatherford Scratchers @ 9998-9994-9989-9982-9975-9960-9945-9930-9900-9870-9840-9815-9785-9755-9730-9725-7605-7600-7580-7540-7520-7500-7480-7460-7450- & Cemented with 900 sacks Dewey Reg. Cement, 600Sx mixed 3% Gel. Plug stopped @ 9936' W/2500# pressure @ 11:30 P.M.

Witnessed by K.V. Stephenson Amerada Petroleum Corporation Foreman 4-1-49  
Name Company Title

Subscribed and sworn before me this  
2nd. day of April 19 49

I hereby swear or affirm that the information given above is true and correct.

Name W. H. Taylor

Position Asst. Dist. Supt.

Representing Amerada Petroleum Corporation  
Company or Operator

Will. H. Taylor  
Notary Public

My commission expires COMMISSION EXPIRES MARCH 1, 1950 Address Drawer D, Monument, New Mexico

Remarks:

APPROVED APR 6 1949

Date \_\_\_\_\_

Ray J. G. Thompson  
Name  
Title