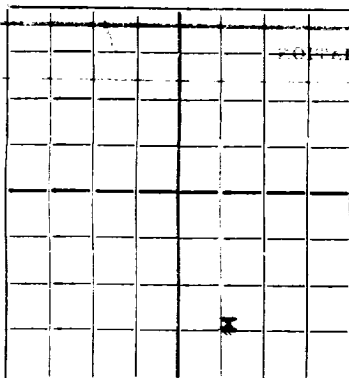


N.

NEW MEXICO OIL CONSERVATION COMMISSION

Santa Fe, New Mexico

AREA 640 ACRES
LOCATE WELL CORRECTLY

WELL RECORD

Mail to Oil Conservation Commission, Santa Fe, New Mexico, or its proper agent not more than twenty days after completion of well. Follow instructions in the Rules and Regulations of the Commission. Indicate questionable data by following it with (?). SUBMIT IN TRIPLICATE.

Amerada Petroleum Corporation

State N

Company or Operator

Lease

Well No. 1 in SW SE of Sec. 1, T. 20-S

R. 36-E, N. M. P. M., Monument Field, Lea County.

Well is 4620 feet south of the North line and 1980 feet west of the East line of Sec. 1-20-36

If State land the oil and gas lease is No. Assignment No.

If patented land the owner is Address

If Government land the permittee is Address

The Lessee is Amerada Petroleum Corporation Address Tulsa, Oklahoma.

Drilling commenced November 17, 1935 Drilling was completed December 18, 1935

Name of drilling contractor Noble Drilling Company Address Tulsa, Oklahoma.

Elevation above sea level at top of casing 3571 feet.

The information given is to be kept confidential until no request. 19

OIL SANDS OR ZONES

No. 1, from 3858 to 3877 No. 4, from to
No. 2, from to No. 5, from to
No. 3, from to No. 6, from to

IMPORTANT WATER SANDS

Include data on rate of water inflow and elevation to which water rose in hole.

No. 1, from none to feet.
No. 2, from to feet.
No. 2, from to feet.
No. 4, from to feet.

CASING RECORD

SIZE	WEIGHT PER FOOT	THREADS PER INCH	MAKE	AMOUNT	KIND OF SHOE	CUT & FILLED FROM	PERFORATED FROM TO	PURPOSE
13"	40#	8	Weld	159'	Tex Pat			
9-5/8"	36#	8	Seam	2305'	Halliburton			
7"	24#	8	Seam	3785'	"			

MUDDING AND CEMENTING RECORD

SIZE OF HOLE	SIZE OF CASING	WHERE SET	NO. SACKS OF CEMENT	METHOD USED	MUD GRAVITY	AMOUNT OF MUD USED
	13"	159'	100	Halliburton		
	9-5/8"	2305'	800	Halliburton		
	7"	3785'	100	Halliburton.		

PLUGS AND ADAPTERS

Heaving plug—Material Length Depth Set
Adapters—Material Size

RECORD OF SHOOTING OR CHEMICAL TREATMENT

SIZE	SHELL USED	EXPLOSIVE OR CHEMICAL USED	QUANTITY	DATE	DEPTH SHOT OR TREATED	DEPTH CLEANED OUT

Results of shooting or chemical treatment

RECORD OF DRILL-STEM AND SPECIAL TESTS

If drill-stem or other special tests or deviation surveys were made, submit report on separate sheet and attach hereto.

TOOLS USED

Rotary tools were used from 0 feet to 3877 feet, and from feet to feet
Cable tools were used from feet to feet, and from feet to feet

PRODUCTION

Put to producing December 18, 1935

The production of the first 24 hours was 774 barrels of fluid of which 98% was oil; 2% emulsion; 2% water; and % sediment. Gravity, Be

If gas well, cu. ft. per 24 hours Gallons gasoline per 1,000 cu. ft. of gas

Rock pressure, lbs. per sq. in.

EMPLOYEES

Fred Traugott Driller Roy Manning. Driller
R.L. Forker Driller Driller

FORMATION RECORD ON OTHER SIDE

I hereby swear or affirm that the information given herewith is a complete and correct record of the well and all work done on it so far as can be determined from available records.

Subscribed and sworn to before me this 21

Monument, New Mexico December 19, 1935.

day of Dec. 1935

Name J. A. Stanley

Position Farm Boss

Patricia Mahoney
Notary Public

FORMATION RECORD

FROM	TO	THICKNESS IN FEET	FORMATION
0	18	18	Cellar and Substructure.
18	58	40	Caliche
58	152	94	Sand And Shells
152	165	13	Red Bed.
165	391	226	Red Bed And Hard Shells.
391	628	237	Red Bed And Shells.
628	650	22	Sand.
650	775	25	Red Bed & Shells.
775	885	110	Red Bed.
885	900	15	Red Bed & Lime.
900	910	10	Red Bed & Gyp.
910	923	13	Broken Lime.
923	1072	149	Anhydrite & Shale.
1072	1210	138	Salt & Anhydrite Shells.
1210	1215	5	Potash
1215	1230	15	Salt.
1230	1240	10	Anhydrite.
1240	1495	255	Salt - Anhydrite & Shells.
1495	1738	243	Salt & Potash
1738	1888	150	Salt and Anhydrite Shells.
1888	2072	184	Salt and Anhydrite.
2072	2232	160	Salt-Anhydrite-Shells.
2232	2246	14	Salt.
2246	2279	33	Anhydrite.
2279	2307	28	Steel line correction.
2307	2343	36	Anhydrite.
2343	2368	25	Anhydrite & Gyp.
2368	2415	47	Anhydrite.
2415	2472	57	Anhydrite & Gyp.
2472	2476	4	Sand.
2476	2538	62	Anhydrite.
2538	2577	39	Anhydrite & Gyp.
2577	2670	93	Anhydrite & Lime.
2670	2743	73	Brown Lime.
2743	3000	57	Anhydrite & Lime.
3000	3014	14	Sandy Lime.
3014	3035	21	Anhydrite.
3035	3045	10	Brown Lime.
3045	3087	42	Anhydrite.
3087	3100	13	Lime and breaks of sand.
3100	3141	41	Anhydrite & Lime.
3141	3166	25	Sandy Lime.
3166	3180	14	Brown Sandy Lime.
3180	3265	85	Brown Lime.
3265	3273	8	Anhydrite.
3273	3300	27	Brown Lime.
3300	3350	50	Anhydrite & Lime.
3350	3376	26	Lime
3376	3416	40	Brown Lime.
3416	3425	9	Anhydrite.
3425	3429	4	Lime.
3429	3449	20	Gray Lime.
3449	3465	16	Lime and streaks of shale.
3465	3670	205	Lime.
3670	3700	30	Lime and streaks of shale.
3700	3744	44	Brown Lime-Soft.
3744	3785	41	Lime.
3785	3794	9	Brown Lime.
3794	3858	64	White Lime.
3858	3877	19	Brown Lime
	3877		T.D.