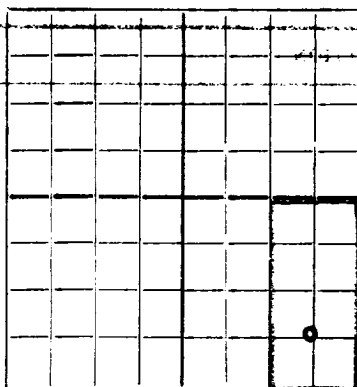


N.

NEW MEXICO OIL CONSERVATION COMMISSION

Santa Fe, New Mexico

AREA 640 ACRES
LOCATE WELL CORRECTLY

WELL RECORD

Mail to Oil Conservation Commission, Santa Fe, New Mexico, or its proper agent not more than twenty days after completion of well. Follow instructions in the Rules and Regulations of the Commission. Indicate questionable data by following it with (?). SUBMIT IN TRIPLICATE.

Gypsy Oil Company

South Graham-State

Company or Operator

Lease

Well No. 1 in SE SE of Sec. 2 T. 20S

R. 36E, N. M. P. M., Monument Field, Lea County.

Well is 660 feet south of the North line and 660 feet west of the East line of SE/4 SE/4

If State land the oil and gas lease is No. A-1543 Assignment No.

If patented land the owner is Address

If Government land the permittee is Address

The Lessee is Gypsy Oil Company Address Tulsa, Oklahoma.

Drilling commenced 9-22-35 19 Drilling was completed 11-17-35 19

Name of drilling contractor Sparkman & Reusch Address Tulsa, Oklahoma.

Elevation above sea level at top of casing 3579 feet.

The information given is to be kept confidential until ? 19

OIL SANDS OR ZONES

No. 1, from 3665 to 3903 No. 4, from to

No. 2, from to No. 5, from to

No. 3, from to No. 6, from to

IMPORTANT WATER SANDS

Include data on rate of water inflow and elevation to which water rose in hole.

No. 1, from ? to feet.

No. 2, from to feet.

No. 2, from to feet.

No. 4, from to feet.

CASING RECORD

SIZE	WEIGHT PER FOOT	THREADS PER INCH	MAKE	AMOUNT	KIND OF SHOE	CUT & FILLED FROM	PERFORATED TO		PURPOSE
13" OD	50	8	Lap.	255'	?		FROM	TO	
9-5/8	36	8	Seam.	2353'	?				
7"	24	10	Seam.	3697'	?				

MUDDING AND CEMENTING RECORD

SIZE OF HOLE	SIZE OF CASING	WHERE SET	NO. SACKS OF CEMENT	METHOD USED	MUD GRAVITY	AMOUNT OF MUD USED
17 1/2"	13"	255'	250	Halliburton		
12 1/2"	9-5/8	2353'	1000	"		
8-5/8	7"	3697'	125	"		

PLUGS AND ADAPTERS

Heaving plug—Material Length Depth Set

Adapters—Material Size

RECORD OF SHOOTING OR CHEMICAL TREATMENT

SIZE	SHELL USED	EXPLOSIVE OR CHEMICAL USED	QUANTITY	DATE	DEPTH SHOT OR TREATED	DEPTH CLEANED OUT

Results of shooting or chemical treatment

RECORD OF DRILL-STEM AND SPECIAL TESTS

If drill-stem or other special tests or deviation surveys were made, submit report on separate sheet and attach hereto.

TOOLS USED

Rotary tools were used from 0 feet to 3903 feet, and from feet to feet

Cable tools were used from feet to feet, and from feet to feet

PRODUCTION

Put to producing November 17th, 1935 First Production

The production of the first 24 hours was 6350 barrels of fluid of which % was oil; %

emulsion; % water; and % sediment. Gravity, Be

If gas well, cu. ft. per 24 hours Gallons gasoline per 1,000 cu. ft. of gas

Rock pressure, lbs. per sq. in.

EMPLOYEES

Driller Driller

Driller Driller

FORMATION RECORD ON OTHER SIDE

I hereby swear or affirm that the information given herewith is a complete and correct record of the well and all work done on it so far as can be determined from available records.

Subscribed and sworn to before me this 4th

Tulsa, Oklahoma, December 4th, 1935

day of December, 1935

Name

Position General Superintendent

Representing Gypsy Oil Company

Company or Operator

My Commission expires Mar. 16, 1936

Address Tulsa, Oklahoma.

FORMATION RECORD

FROM	TO	THICKNESS IN FEET	FORMATION
0'	199		Red Bed Sand and shells
	258		Red Bed
	548		Red Bed and Shells
	640		Red Bed and shale
	655		Hard sand
	748		Shale and shells
	807		Red Bed and sandy shells
	909		Red Bed and shells
	1060		Red Bed and Anhydrite
	1136		Anhydrite
	1240		Red Bed and shells, some salt
	1428		Anhydrite and salt
	1545		Red Bed, Salt and shells
	1854		Salt and Potash
	1904		Salt and Red Bed
	1964		Salt
	2257		Salt and Potash
	2270		Anhydrite
	2285		Salt and Anhydrite
	2360		Anhydrite
	2425		Anhydrite, lime and salt
	2486		Anhydrite
	2520		Anhydrite and lime
	3422		Anhydrite
	3665		Anhydrite and lime
	3903'		Upper San Andreas