


SCOUT REPORT

NEW MEXICO OIL CONSERVATION COMMISSION

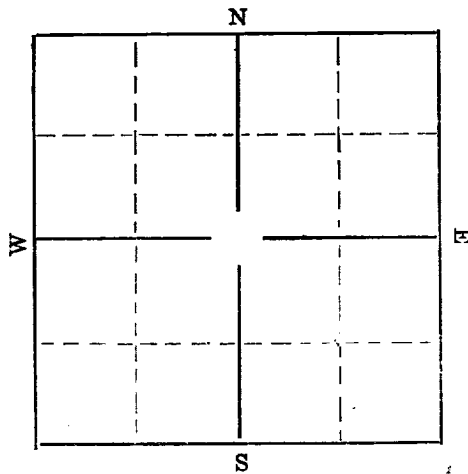

AMOUNT CASING & CEMENTING RECORD

Size	Feet	Inches	Sax Cement
20"	177		225
18"	125		200
16"	100		150

TUBING RECORD

PACKER

Company Comerada Pet. Corp.
 Farm Name H. W. Andrews Well No. 8
 Sec. 12 Twp. 20 Range 36 County Lea
 Feet from Line: 589 N. S. E. 231 W.
 Elevation Method
 Contractor
 Spudded 9-11-47 Completed

ACID RECORD Gals.

TA	TG
TX	TSA
TCA	TGI
BX	TYo
TY	TABo
TSR	TPenn
Top Pay	TQ
	TOrd

SHOOTING RECORD

No. of Quarts	From	To
No. of Quarts	From	To
S/	S/	S/
S/	S/	S/
S/	S/	S/

Date		Date	
9-10	Run to Spud	10-2	6142 R
9-17	2982 R	11-25	6142 R
9-24	2400 R Rng. Cng.	12-3	6523 R
10-2	2980 R	12-10	6523 R
10-8	3553 R	12-17	7115 R
10-15	3932 R	12-30	7805 R Jcty.
10-22	4220 R	1-7	7929 R
10-29	4622 R	1-15	8418 R
11-5	5116 R	1-22	8599 R
11-12	5624 R	1-28	8780 R

2-5 #9173A
2-11 #4647B
2-18 #10083L

2-25 #10221 L+chert

MAR 3 #10504 —

MAR 10 TD10701 S. Stick Drill Pipe
on bottom. Working on Drill

TD10719 L+-, Coring

MAR 24 TD10819 S+-, Fishg outers
core barrel

MAR 31 TD10827 Mr. PB10488
Prep to RC

APR 7 TD10827 Mr. PB8400
Prep to shoot csg off

APR 14 TD10827 Mr. DO5250
Prep to shoot

APR 21 TD10827 Mr. DO3900
Fishg. shot 160-3891-96

APR 28 TD 10827 Mr. - DO3884
testg - at 3900 -
fw 4 1/2 hrs. - no rec.
test 500 AIA - fw 4 hrs. -
Rec. 97 BSW - test returns
3841 - Ag, 48 sec - DO
3884 - Perf 3875-83 - 32 shots
2 3/8" tbg packer - 3786 -
test 500 AIA - 1. 5020 ft
24 hrs. - 1/2" cl - 6% BS+W
Perf. 3740-43 - 4 shots -
test + F - Both perf - 400 BSW
24 hrs. - 10% BS+W
GOR 602 - Peram
tubing Perf also Packer 3719
test 250 upper AIA, toward
tubing 3783 packer not set
fw + 3 load oil

MAY 12 TD 10827, Granite; DO 3884;
Top Pay 3740; Elev. 3576;
IP flow 400 BOPD thru 2 1/2"
tbg. @ 3879; 589 North 3;
751 West;

Complete
4-27-48;
Government