


OIL CONSERVATION COMMISSION

Santa Fe, New Mexico

MISCELLANEOUS REPORTS ON WELLS

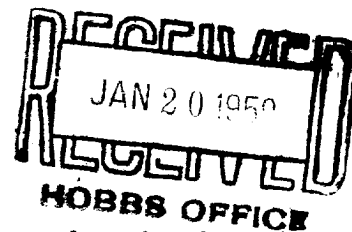

DUPLICATE

Submit this report in triplicate to the Oil Conservation Commission or its proper agent within ten days after the work specified is completed. It should be signed and sworn to before a notary public for reports on beginning drilling operations, results of shooting well, results of test of casing shut off, result of plugging of well, and other important operations, even though the work was witnessed by an agent of the Commission. Reports on minor operations need not be signed and sworn to before a notary public. See additional instructions in the Rules and Regulations of the Commission.

Indicate nature of report by checking below.

REPORT ON BEGINNING DRILLING OPERATIONS		REPORT ON REPAIRING WELL	
REPORT ON RESULT OF SHOOTING OR CHEMICAL TREATMENT OF WELL		REPORT ON PULLING OR OTHERWISE ALTERING CASING	<input checked="" type="checkbox"/>
REPORT ON RESULT OF TEST OF CASING SHUT-OFF		REPORT ON DEEPENING WELL	
REPORT ON RESULT OF PLUGGING OF WELL			

January 17, 1950

Monument, New Mexico

Date

Place

OIL CONSERVATION COMMISSION,
SANTA FE, NEW MEXICO
Gentlemen:

Following is a report on the work done and the results obtained under the heading noted above at the _____

Amerada Petroleum Corporation W.P. Byrd Well No. 3 in the _____
Company or Operator Lease

W. of the SE 1/4 of Sec. 12, T. 20, R. 36, N. M. P. M.,
Monument Field, Lea County.

The dates of this work were as follows: January 10, 1950 to January 16, 1950

Notice of intention to do the work was ~~(insert)~~ submitted on Form C-102 on January 10, 19 50
and approval of the proposed plan was ~~(insert)~~ obtained. (Cross out incorrect words.)

DETAILED ACCOUNT OF WORK DONE AND RESULTS OBTAINED

T.D. 3875', P.B.D. 3850', 6-5/8" OD, Casing set at 3784'
Rigged up Mobil Unit and pulled out of the hole with 2-7/8" EUE Tubing. Ran back with Sand Pump and cleaned out the hole to T.D. (3875') Ran Lane-Wells Gamma Ray & Neutron Surveys. Rigged up Dump Bailer and spotted at intervals a total of 7 sacks of Incon Cement. Top of cement at 3860'. Dumped 14 gallons of Russell Plastic on top of cement. Measured up and found top of plug at 3850'. Ran back in hole with 2-7/8" EUE Tubing and Packer. Packer set at 3741' and Tubing set at 3868' with six (6) Olsee Flow Valves at 1183', 1922', 2494', 2974', 3359' & 3707'. Kicked well off with input gas in in 14 hours, flowed 23.82 bbls of oil plus 56.60 bbls. of water. GOR 2920

Witnessed by D.F. Funes Amerada Petroleum Corporation Foreman
Name Company Title

Subscribed and sworn before me this _____

19 day of Jan. 19 50

[Signature]
Notary Public

I hereby swear or affirm that the information given above is true and correct.

Name [Signature]

Position Assistant District Superintendent

Representing Amerada Petroleum Corporation
Company or Operator

My commission expires 10/24/53

Address Drawer "D", Monument, New Mexico

Remarks:

APPROVED

Date JAN 19 1950

[Signature]
Name Will A. Gas Inspector
Title

1941. 10. 10. 10. 10.

1941. 10. 10. 10. 10.

1941. 10. 10. 10. 10.

1941. 10. 10. 10. 10.

1941. 10. 10. 10. 10.

1941. 10. 10. 10. 10.

1941. 10. 10. 10. 10.

1941. 10. 10. 10. 10.

1941. 10. 10. 10. 10.

1941. 10. 10. 10. 10.

1941. 10. 10. 10. 10.

1941. 10. 10. 10. 10.