


## NEW MEXICO OIL CONSERVATION COMMISSION

Santa Fe, New Mexico

## WELL RECORD

Mail to Oil Conservation Commission, Santa Fe, New Mexico, or its proper agent not more than twenty days after completion of well. Follow instructions in the Rules and Regulations of the Commission. Indicate questionable data by following it with (?). SUBMIT IN TRIPLICATE.

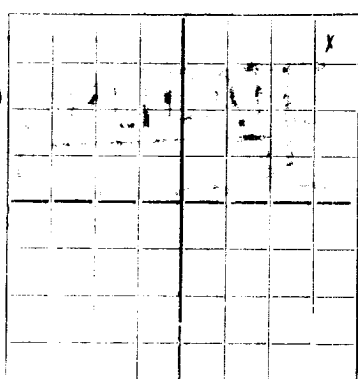

AREA 640 ACRES  
LOCATE WELL CORRECTLY

L. E. Elliott

E. M. Elliott

Well No. 1 in NE 1/4 of Sec. 34, T. 20SR. 36E, N. M. P. M., Eumont Field, Lea County.Well is 330 feet south of the North line and 330 feet west of the East line of Sec. 34If State land the oil and gas lease is No. B-11298 Assignment No. 2

If patented land the owner is \_\_\_\_\_, Address \_\_\_\_\_

If Government land the permittee is \_\_\_\_\_, Address \_\_\_\_\_

The Lessee is E. M. Elliott, Address Box 703, Roswell, N. M.Drilling commenced November 3 19 55 Drilling was completed November 22 19 55Name of drilling contractor Makin Drilling Company, Address Hobbs, N. M.Elevation above sea level at top of casing 3575 feet.The information given is to be kept confidential until Release 19 \_\_\_\_

## OIL SANDS OR ZONES

No. 1, from 3950 to 3988 No. 4, from \_\_\_\_\_ to \_\_\_\_\_

No. 2, from \_\_\_\_\_ to \_\_\_\_\_ No. 5, from \_\_\_\_\_ to \_\_\_\_\_

No. 3, from \_\_\_\_\_ to \_\_\_\_\_ No. 6, from \_\_\_\_\_ to \_\_\_\_\_

## IMPORTANT WATER SANDS

Include data on rate of water inflow and elevation to which water rose in hole.

No. 1, from \_\_\_\_\_ to \_\_\_\_\_ feet. \_\_\_\_\_

No. 2, from \_\_\_\_\_ to \_\_\_\_\_ feet. \_\_\_\_\_

No. 3, from \_\_\_\_\_ to \_\_\_\_\_ feet. \_\_\_\_\_

No. 4, from \_\_\_\_\_ to \_\_\_\_\_ feet. \_\_\_\_\_

## CASING RECORD

SIZE	WEIGHT PER FOOT	THREADS PER INCH	MAKE	AMOUNT	KIND OF SHOE	CUT & FILLED FROM	PERFORATED FROM	TO	PURPOSE
8 5/8	24	8	J & L	321	Guide				Surface
5 1/2	14	8	J & L	4007	Float		3950	3954	Oil String
							3958	3964	
							3967	3977	
							3983	3988	

## MUDDING AND CEMENTING RECORD

SIZE OF HOLE	SIZE OF CASING	WHERE SET	NO. SACKS OF CEMENT	METHOD USED	MUD GRAVITY	AMOUNT OF MUD USED
11"	8 5/8	321	275	Halliburton	9.0 <del>9.0</del>	Natural
7 7/8	5 1/2	4007	850	Halliburton	10.5	Salt Base Natural

## PLUGS AND ADAPTERS

Heaving plug--Material \_\_\_\_\_ Length \_\_\_\_\_ Depth Set \_\_\_\_\_

Adapters--Material \_\_\_\_\_ Size \_\_\_\_\_

## RECORD OF SHOOTING OR CHEMICAL TREATMENT

SIZE	SHELL USED	EXPLOSIVE OR CHEMICAL USED	QUANTITY	DATE	DEPTH SHOT OR TREATED	DEPTH CLEANED OUT

Results of shooting or chemical treatment Treated with 20,000 gallons Petro-frac, 1 lb. sand per gallon pumping 156 bbls. fluid/day, 50% water.

## RECORD OF DRILL-STEM AND SPECIAL TESTS

If drill-stem or other special tests or deviation surveys were made, submit report on separate sheet and attach hereto.

## TOOLS USED

Rotary tools were used from Surface feet to T.D. feet, and from \_\_\_\_\_ feet to \_\_\_\_\_ feet.

Cable tools were used from \_\_\_\_\_ feet to \_\_\_\_\_ feet, and from \_\_\_\_\_ feet to \_\_\_\_\_ feet.

## PRODUCTION

Put to producing December 12 55The production of the first 24 hours was 156 barrels of fluid of which 50 % was oil; \_\_\_\_\_ %emulsion; 50 % water; and \_\_\_\_\_ % sediment. Gravity, Be \_\_\_\_\_

If gas well, cu. ft. per 24 hours \_\_\_\_\_ Gallons gasoline per 1,000 cu. ft. of gas \_\_\_\_\_

Rock pressure, lbs. per sq. in. \_\_\_\_\_

## EMPLOYEES

W. B. Gray \_\_\_\_\_, Driller H. J. Green \_\_\_\_\_, Driller

P. G. Murph \_\_\_\_\_, Driller \_\_\_\_\_, Driller

## FORMATION RECORD ON OTHER SIDE

I hereby swear or affirm that the information given herewith is a complete and correct record of the well and all work done on it so far as can be determined from available records.

Roswell, New Mexico

12/20/55

Name E. M. Elliott Date \_\_\_\_\_Position AgentRepresenting L. E. Elliott Company or Operator.Address Box 703, Roswell, N. M.

# FORMATION RECORD

FROM	TO	THICKNESS IN FEET	FORMATION
0	50	50	Caliche & Red Bed
50	1079	1029	Red Bed
1079	1728	649	Red Bed & Anhydrite
1728	1980	192	Red Bed & Gypsum
1980	1970	50	Red Bed - Salt & Anhydrite
1970	2818	848	Salt - Anhydrite Stringers
2818	2947	129	Salt & Gypsum
2947	3015	68	Anhydrite
3015	3060	45	Anhydrite & Gypsum
3060	3547	487	Anhydrite & Lime
3547	4009	462	Lime