


FORM C-105

N.

NEW MEXICO OIL CONSERVATION COMMISSION

Santa Fe, New Mexico

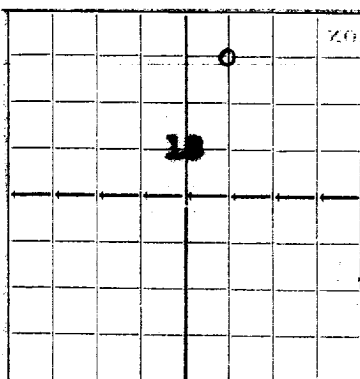

WELL RECORD

Mail to Oil Conservation Commission, Santa Fe, New Mexico, or its proper agent not more than twenty days after completion of well. Follow instructions in the Rules and Regulations of the Commission. Indicate questionable data by following it with (?). SUBMIT IN TRIPLICATE.

AREA 640 ACRES  
LOCATE WELL CORRECTLY

The Texas Company

Drawer K, Wink, Texas

B. M. Keohane, Operator

1

NW 1/4/ NE 1/4

198

37 E Lease

Well No. Monument

in

of Sec. Lea

T.

R. 600, N. M. P. M., 1980 Field, Section 18 County.

Well is feet south of the North line and feet west of the East line of

If State land the oil and gas lease is No. B. M. Keohane & Wife, Alvin J. Roswell, New Mexico

If patented land the owner is Address

If Government land The Texas Company Address Box 2532, Houston, Texas

The Lessee is July 20, 37 Address August 30, 37

Drilling commenced Mandeville & Thompson Drilling was completed Chickasha, Oklahoma

Name of drilling contractor XXXXXXX 3700 at derrick floor.

Elevation above sea level at top of casing feet.

The information given is to be kept confidential until 19

3790'

2803' SANDS OR ZONES

No. 1, from 3890 to 4025 No. 4, from to

No. 2, from to No. 5, from to

No. 3, from to No. 6, from to

IMPORTANT WATER SANDS

Include data on rate of water inflow and elevation to which water rose in hole.

No. 1, from to feet.

No. 2, from to feet.

No. 3, from to feet.

No. 4, from to feet.

CASING RECORD

SIZE	WEIGHT PER FOOT	THREADS PER INCH	MAKE	AMOUNT	KIND OF SHOE	CUT & FILLED FROM	PERFORATED FROM TO	PURPOSE
15"	40	8	LW	120'	Texas Pattern			
9-5/8"	40	8	Smis	1371	Baker Guide			
7"	24#	10	Smis	3881	Halliburton Guide			

MUDDING AND CEMENTING RECORD

SIZE OF HOLE	SIZE OF CASING	WHERE SET	NO. SACKS OF CEMENT	METHOD USED	MUD GRAVITY	AMOUNT OF MUD USED
17 1/2"	13	140	125	Halliburton		
12 1/2"	9-5/8"	1870	675	ditto		
8-3/4"	7"	3870	250	ditto		

PLUGS AND ADAPTERS

Heaving plug—Material Length Depth Set  
Adapters—Material Size

RECORD OF SHOOTING OR CHEMICAL TREATMENT

SIZE	SHELL USED	EXPLOSIVE OR CHEMICAL USED	QUANTITY	DATE	DEPTH SHOT OR TREATED	DEPTH CLEANED OUT
		Dowell XM Acid 2000	8-30-37	3890-4025		

Results of shooting or chemical treatment  
Before acid treatment would not flow. After treatment flowed 360 bbls of pipe line oil in 8 hours with gas/oil ratio 1311.

RECORD OF DRILL-STEM AND SPECIAL TESTS

If drill-stem or other special tests or deviation surveys were made, submit report on separate sheet and attach hereto.

TOOLS USED

Rotary tools were used from feet to feet, and from feet to feet  
Cable tools were used from 0 feet to 4025 feet, and from feet to feet

PRODUCTION

Put to producing 19  
The production of the first 24 hours was 37 on test, % was oil; %  
emulsion; % water; and 340 % sediment. Gravity, Be 100  
If gas well, cu. ft. per 24 hours Gallons gasoline per 31.5 cu. ft. of gas  
Rock pressure, lbs. per sq. in.  
Gas/Oil ratio 1311

EMPLOYEES

Driller W. A. Point  
Driller G. R. Hurd  
Driller W. O. Birt

FORMATION RECORD ON OTHER SIDE

I hereby swear or affirm that the information given herewith is a complete and correct record of the well and all work done on it so far as can be determined from available records.

Subscribed and sworn to before me this 18th day of September 1937  
Notary Public

Place Wink, Texas, Date September 18, 1937  
Name  
Position District Superintendent  
Representing The Texas Company  
Company or Operator  
Address

My Commission expires

5-31-39

Drawer K, Wink, Texas

## FORMATION RECORD

FROM	TO	THICKNESS IN FEET	FORMATION
0	56	56	Caliche
56	530	474	Red Beds
530	1300	770	Red Rock
1300	1475	175	Anhydrite
1475	1810	335	Salt and Anhydrite
1810	1950	140	Broken Anhydrite and salt
1950	2560	610	Salt and Anhydrite
2560	2790	230	Anhydrite
2790	2803	13	Brown Sandy Lime
2803	3114	311	Brown Lime and anhydrite
3114	3248	134	Hard Grey Lime and Anhydrite
3248	3510	262	Hard Grey Lime
3510	3890	380	Hard White Lime
3890	3950	60	Medium Lime
3950	4025	75	Medium Broken Lime
			TOTAL DEPTH - 4025'.