

N.

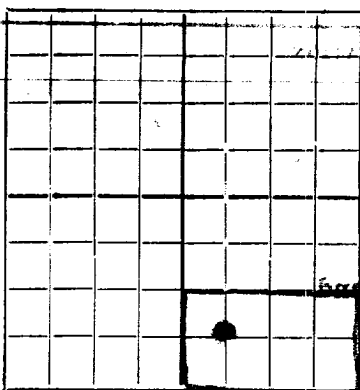
NEW MEXICO OIL CONSERVATION COMMISSION

Santa Fe, New Mexico

OF

MORE

WELL RECORD

AREA 640 ACRES
LOCATE WELL CORRECTLY

I swear before the Conservation Commission, Santa Fe, New Mexico, or its proper agent, that the information given hereon is true and correct, and that I have followed the Rules and Regulations of the Commission. Indicate questionable data by following it with (?). SUBMIT IN TRIPLICATE.

Gulf Oil Corporation and **Graham State**
Company or Operator Lease
Well No. **1** of Sec. **19**
R. **57E**, N. M. P. M., Monument, **19** County.
Well is **660** feet south of the North line and **660** feet west of the East line of **19**
If State land the oil and gas lease is No. **A-1548** Assignment No. **19**
If patented land the owner is **19** Address **19**
If Government land the permittee is **19** Address **19**
The Lessee is **Gulf Oil Corporation of Pennsylvania** Address **Tulsa, Oklahoma.**
Drilling commenced **Feb. 3rd,** 19 **36** Drilling was completed **March 12th** 19 **36**
Name of drilling contractor **McQuade & Son** Address **19**
Elevation above sea level at top of casing **3857** feet.
The information given is to be kept confidential until **1** 19 **36**

OIL SANDS OR ZONES

No. 1, from **5785** to **5985** No. 4, from **19** to **19**
No. 2, from **5985** to **4158** No. 5, from **19** to **19**
No. 3, from **19** to **19** No. 6, from **19** to **19**

IMPORTANT WATER SANDS

Include data on rate of water inflow and elevation to which water rose in hole.

No. 1, from **Rotary hole** to **19** feet.
No. 2, from **19** to **19** feet.
No. 2, from **19** to **19** feet.
No. 4, from **19** to **19** feet.

CASING RECORD

SIZE	WEIGHT PER FOOT	THREADS PER INCH	MAKE	AMOUNT	KIND OF SHOE	CUT & FILLED FROM	PERFORATED FROM TO	PURPOSE
15"	40	8	Lapweld	227'	?			
9-5/8"	56	8	Lapweld	1333'	?			
7"	24	10	Lapweld	5784'	?			

MUDDING AND CEMENTING RECORD

SIZE OF HOLE	SIZE OF CASING	WHERE SET	NO. SACKS OF CEMENT	METHOD USED	MUD GRAVITY	AMOUNT OF MUD USED
17 1/2"	15	227'	250	Halliburton		
13 1/2"	9-7/8"	1333'	575	"		
8-5/8"	7"	5784'	400	"		

PLUGS AND ADAPTERS

Heaving plug—Material **19** Length **19** Depth Set **19**
Adapters—Material **19** Size **19**

RECORD OF SHOOTING OR CHEMICAL TREATMENT

SIZE	SHELL USED	EXPLOSIVE OR CHEMICAL USED	QUANTITY	DATE	DEPTH SHOT OR TREATED	DEPTH CLEANED OUT

Results of shooting or chemical treatment **19**

RECORD OF DRILL-STEM AND SPECIAL TESTS

If drill-stem or other special tests or deviation surveys were made, submit report on separate sheet and attach hereto.

TOOLS USED

Rotary tools were used from **0** feet to **4158'** feet, and from **19** feet to **19** feet
Cable tools were used from **19** feet to **19** feet, and from **19** feet to **19** feet

PRODUCTION

Put to producing **March 12th,** 19 **36**
The production of the first 24 hours was **2112** barrels of fluid of which **19** % was oil; **19** % emulsion; **0** % water; and **19** % sediment. Gravity, Be **19**
If gas well, cu. ft. per 24 hours **2,405,000** Gallons gasoline per 1,000 cu. ft. of gas **19**
Rock pressure, lbs. per sq. in. **1**

EMPLOYEES

1, Driller **19**, Driller
19, Driller **19**, Driller

FORMATION RECORD ON OTHER SIDE

I hereby swear or affirm that the information given herewith is a complete and correct record of the well and all work done on it so far as can be determined from available records.

Subscribed and sworn to before me this **27th** **Tulsa, Oklahoma** **March 27th, 1936**
day of **March** 19 **36** Name **19**
Position **General Superintendent**

19
Notary Public.

FORMATION RECORD

FROM	TO	THICKNESS IN FEET	FORMATION
			WELL RECORD
0'	40'		Caliche and surface sand
	48		Water sand and gravel
	50		Clay and shaly
	57		Red bed
	1255		Anhydrite
	1554		Anhydrite and broken salt
	1644		Salt
	1648		Anhydrite and broken salt
	1675		Salt
	1684		Anhydrite and salt
	1714		Salt
	1725		Anhydrite
	1759		Anhydrite and broken salt
	1805		Anhydrite
	1874		Anhydrite and lime
	1889		Lime
	1905		Upper part of limestone
	1915		Tertiary lime
	1971		Total depth - Plugbed back 4550 ft.