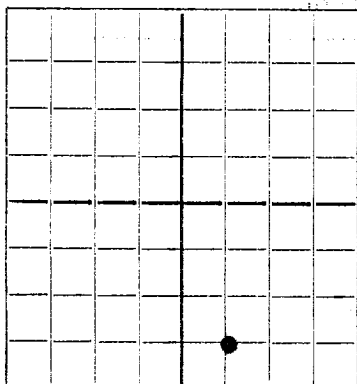


N.

NEW MEXICO OIL CONSERVATION COMMISSION

Santa Fe, New Mexico

AREA 640 ACRES
LOCATE WELL CORRECTLY

WELL RECORD

Mail to Oil Conservation Commission, Santa Fe, New Mexico, or its proper agent not more than twenty days after completion of well. Follow instructions in the Rules and Regulations of the Commission. Indicate questionable data by following it with (?). SUBMIT IN TRIPLICATE.

Gulf Oil Corporation

May Love

Company or Operator

Lease

Well No. 1 in SW SE of Sec. 32, T. 19S

R. 37E, N. M. P. M., Monument Field, Lea County.

Well is 660 feet south of the North line and 660 feet west of the East line of SW SE

If State land the oil and gas lease is No. Assignment No.

If patented land the owner is Address

If Government land the permittee is Address

The Lessee is Gulf Oil Corporation Address Tulsa, Oklahoma.

Drilling commenced 9-18-36 Drilling was completed 10-12-36

Name of drilling contractor Loffland Bros. Address Tulsa, Oklahoma.

Elevation above sea level at top of casing 5569 feet.

The information given is to be kept confidential until 7 19

OIL SANDS OR ZONES

No. 1, from 5455 to 5820 No. 4, from to

No. 2, from 5820 to 5890 No. 5, from to

No. 3, from to No. 6, from to

IMPORTANT WATER SANDS

Include data on rate of water inflow and elevation to which water rose in hole.

No. 1, from Rotary hole to feet.

No. 2, from to feet.

No. 3, from to feet.

No. 4, from to feet.

CASING RECORD

SIZE	WEIGHT PER FOOT	THREADS PER INCH	MAKE	AMOUNT	KIND OF SHOE	CUT & FILLED FROM	PERFORATED FROM TO	PURPOSE
10-3/4	32	8	Lapweld	284'				
7-5/8	22	8	"	1206'				
5-1/2	17	10	"	3773'				

MUDDING AND CEMENTING RECORD

SIZE OF HOLE	SIZE OF CASING	WHERE SET	NO. SACKS OF CEMENT	METHOD USED	MUD GRAVITY	AMOUNT OF MUD USED
13-5/4	10-3/4	284'	250	Halliburton		
9-7/8	7-5/8	1206'	300	"		
8-5/4	5-1/2	3773'	200	"		

PLUGS AND ADAPTERS

Heaving plug—Material Length Depth Set

Adapters—Material Size

RECORD OF SHOOTING OR CHEMICAL TREATMENT

SIZE	SHELL USED	EXPLOSIVE OR CHEMICAL USED	QUANTITY	DATE	DEPTH SHOT OR TREATED	DEPTH CLEANED OUT
		Hydrochloric Acid	2000	10-11-36		

Results of shooting or chemical treatment

RECORD OF DRILL-STEM AND SPECIAL TESTS

If drill-stem or other special tests or deviation surveys were made, submit report on separate sheet and attach hereto.

TOOLS USED

Rotary tools were used from 0 feet to 5890' feet, and from feet to feet

Cable toops were used from feet to feet, and from feet to feet

PRODUCTION

Put to producing Oct. 16th, 1936

The production of the first 24 hours was 450 barrels of fluid of which % was oil; %

emulsion; % water; and % sediment. Gravity, Be

If gas well, cu. ft. per 24 hours 852,000 Gallons gasoline per 1,000 cu. ft. of gas

Rock pressure, lbs. per sq. in.

EMPLOYEES

? Driller Driller

Driller Driller

FORMATION RECORD ON OTHER SIDE

I hereby swear or affirm that the information given herewith is a complete and correct record of the well and all work done on it so far as can be determined from available records.

Subscribed and sworn to before me this 29th,

Tulsa, Oklahoma. October 29th, 1936

day of October, 1936

Name J. W. Evans

Position General Superintendent

Representing Gulf Oil Corporation

My Commission expires March 16, 1940

Address Tulsa, Oklahoma.

FORMATION RECORD

FROM	TO	THICKNESS IN FEET	FORMATION
0	68'		Surface
	245		Sand
	286		Red bed
	340		Red rock and shale
	865		Red bed and shells
	1143		red rock and shale
	1188		sand, red bed and shale
	1275		anhydrite
	1527		salt and potash
	1512		salt
	1555		salt and anhydrite
	1565		anhydrite
	1658		salt and anhydrite shells
	1865		salt and anhydrite
	2074		salt
	2210		salt and anhydrite
	2255		anhydrite
	2375		salt and anhydrite
	2408		anhydrite
	2500		salt and anhydrite
	2548		anhydrite and gyp
	2598		anhydrite
	2632		anhydrite and gyp
	2650		anhydrite
	2688		anhydrite and shells
	2770		anhydrite and lime, gyp
	2827		lime
	2886		lime, broken
	2964		broken lime and anhydrite
	3018		lime
	3080		sandy lime
	3279		lime
	3362		lime, showing gas
	3430		lime
	3449		broken lime
	3587		lime
	3622		hard lime
	3658		lime showing gas
	3716		hard lime
	3775		lime
	3890		lime