

NEW MEXICO OIL CONSERVATION COMMISSION

Santa Fe, New Mexico

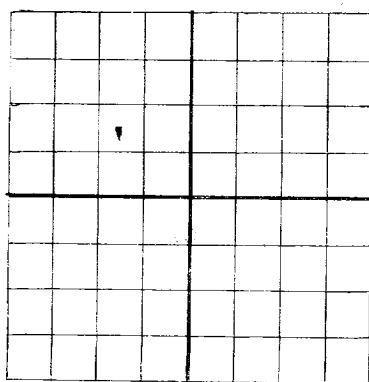
WELL RECORD

HOBBS OFFICE

Mail to Oil Conservation Commission, Santa Fe, New Mexico, or its proper agent not more than twenty days after completion of well. Follow instructions in the Rules and Regulations of the Commission. Indicate questionable data by following it with (?). SUBMIT IN TRIPPLICATE.

DUPLICATE

Odessa, Texas.

AREA 640 ACRES
LOCATE WELL CORRECTLY

Great Western Producers, Inc.

Bordages Company or Operator 2 SE/4 of NW/4 33 Address 19 S
37 E Lease Well No. Monument in of Sec. Lea T.
R. 1650 N. M. P. M. 1650 Field, E W 33 County.
Well is feet south of the North line and feet west of the East line of
If State land the oil and gas lease is No. Assignment No.
If patented land the owner is Bordages Address
If Government Great Western Producers, Inc. Address Odessa, Texas.
The Lessee is January 29, 39 Address March 14, 39
Drilling commenced Geo. P. Livermore, Inc. Drilling was completed Odessa, Texas.
Name of drilling contractor 3575 Address
Elevation above sea level at top of casing feet.
The information given is to be kept confidential until 19

3780

3931

OIL SANDS OR ZONES

No. 1, from to No. 4, from to
No. 2, from to No. 5, from to
No. 3, from to No. 6, from to

IMPORTANT WATER SANDS

Include data on water of water inflow and elevation to which water rose in hole.

No. 1, from to feet.
No. 2, from to feet.
No. 3, from to feet.
No. 4, from to feet.

CASING RECORD

CONDUCTOR	SIZE	WEIGHT PER FOOT	THREADS PER INCH	MAKE	AMOUNT	KIND OF SHOE	CUT & FILLED FROM	PERFORATED		PURPOSE
								FROM	TO	
	8 5/8	28#	8	Nat'l	1350	Baker				Water shut off Oil String
	5 1/2	17#	10	Nat'l	3736	Baker				

MUDDING AND CEMENTING RECORD

SIZE OF HOLE	SIZE OF CASING	WHERE SET	NO. SACKS OF CEMENT	METHOD USED	MUD GRAVITY	AMOUNT OF MUD USED
12 1/4	8 5/8	1350	625	Halliburton	---	-----
7 7/8	5 1/2	3736	200	Halliburton	---	-----

PLUGS AND ADAPTERS

Heaving plug—Material Length Depth Set
Adapters—Material Size

RECORD OF SHOOTING OR CHEMICAL TREATMENT

SIZE	SHELL USED	EXPLOSIVE OR CHEMICAL USED	QUANTITY	DATE	DEPTH SHOT OR TREATED	DEPTH CLEANED OUT
1000 gal		Halliburton	1000 gal	Feb. 27	3736-3915	Bottom

Results of shooting or chemical treatment Acid increased production from 10 bbl/day to 58 bbls/day. Deepened well after acid and increased production to 150 bbl/day.

RECORD OF DRILL-STEM AND SPECIAL TESTS

If drill-stem or other special tests or deviation surveys were made, submit report on separate sheet and attach hereto.

TOOLS USED

Rotary tools were used from 0 feet to 3931 feet, and from feet to feet
Cable tools were used from feet to feet, and from feet to feet

PRODUCTION

Put to producing February 27, 1939
The production of the first 24 hours was 10 barrels of fluid of which 100 % was oil; %
emulsion; % water; and % sediment. Gravity, Be 33
If gas well, cu. ft. per 24 hours Gallons gasoline per 1,000 cu. ft. of gas
Rock pressure, lbs. per sq. in.

EMPLOYEES

J. M. Cambron Driller B. H. Jowers Driller
Homer Allison Driller J. W. Hale Driller

FORMATION RECORD ON OTHER SIDE

I hereby swear or affirm that the information given herewith is a complete and correct record of the well and all work done on it so far as can be determined from available records.

Subscribed and sworn to before me this 22nd day of March 1939 Odessa, Texas March 22, 1939

Notary Public Ector County, Texas Name Richard P. George Position Petroleum Engineer.

Representing Great Western Producers, Inc. Company or Operator Address Odessa, Texas.

My Commission expires 6-1-39

FORMATION RECORD

FROM	TO	THICKNESS IN FEET	FORMATION
0	60	60	Surface clay and caleche
60	140	80	Sand and Shells
140	200	60	Clay
200	750	550	Red Beds
750	915	165	Red Beds, Shells and Red Rock
915	1023	108	Red Rock and Sand
1023	1180	157	Red Bed and Red Rock
1180	1312	132	Red Bed and Shells
1312	1355	43	Red Beds and Anhydrite
1355	1475	120	Anhydrite
1475	2500	1025	Salt and Anhydrite
2500	2660	160	Anhydrite with streaks of salt.
2660	2768	108	Sand and Anhydrite
2768	2865	97	Anhydrite
2865	3041	176	Sandy lime and Anhydrite
3041	3073	32	Anhydrite and lime shells
3073	3136	63	Anhydrite and Gyp
3136	3319	183	Lime and Anhydrite
3319	3365	46	Lime
3365	3447	82	Lime and Anhydrite
3447	3604	157	Lime
3604	3640	36	Broken lime
3640	3727	87	Brown lime
3727	3736	9	Light colored lime
3736	3880	44	Light grey lime (hard)
3780	3881	101	Lime
3881	3912	31	Broken lime-oil stained
3912	3918	6	Buff colored lime-slightly darker
3918	3923	5	Dark grey lime-dense.
3923	3931	8	Dark colored lime-good porosity.
	3931	Total Depth/	